




Rowe international, inc.

A SUBSIDIARY OF TRIANGLE INDUSTRIES, INC.
75 TROY HILLS RD., WHIPPANY, N.J. 07981, TEL. (201) 987-0400, CABLE: ROVENO



SILVER SAGE

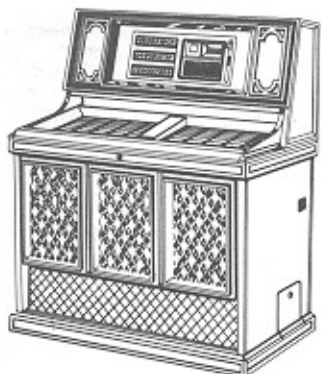

MONTEREY



BOURBON STREET



LAVENDER LADIES

MM-6 phonographs supplement

SERVICE MANUAL PARTS CATALOG

WARRANTY

Rowe extends to the original operator of this equipment the following warranty:

All parts are guaranteed to be free of defects in material and workmanship. Rowe agrees to repair or replace any part which proves defective without charge, f.o.b. factory as follows:

	MOVING PARTS	NON-MOVING PARTS
Search Unit	5 years	5 years
Record Changer	5 years	2 years
Other Components	5 years	1 year

In the case of parts supplied to Rowe as components, Rowe extends the same warranty period as extended by the original manufacturer.

The above warranty applies provided that all parts of the machine have been serviced properly as recommended in the service manual, and provided the alleged defective part, upon examination by Rowe, shall prove to be thus defective. This warranty will not apply to any machine or any part thereof which has been subjected to any accident, abuse, or misuse.

ROWE INTERNATIONAL, INC., EXTENDS NO WARRANTY, EXPRESS OR IMPLIED, TO PURCHASERS OR USERS OF ITS PRODUCTS EXCEPT AS HEREIN SET FORTH, WHETHER BY OPERATION OF LAW OR OTHERWISE.

**USE THIS SUPPLEMENT IN CONJUNCTION WITH
MM-5 SERVICE MANUAL AND PARTS CATALOG.
PART NO. 200-14782**

SPECIFICATIONS

MM-6

GENERAL

DEPTH	26-5/8 in.
WIDTH	41-7/8 in.
HEIGHT	51-1/8 in.
SHIPPING WEIGHT (DOMESTIC)	420 lbs.
SHIPPING WEIGHT (EXPORT)	440 lbs.
NET WEIGHT	385 lbs.
POWER REQUIREMENTS	115 vac, 50/60 Hz, 315 watts

RECORD CHANGER MECHANISM

CAPACITY	100 records
RECORD SIZE	7 inches
SPEED	33 and 45 rpm

CREDIT AND PRICING SYSTEM

ACCUMULATOR TYPE CREDIT UNIT--DOLLAR BILLS OPTIONAL

COINS ACCEPTED.	Nickels Dimes Quarters Half-Dollars
TOTAL CREDIT ACCUMULATIONS	\$3.00
PRICING.	See pricing chart

SOUND SYSTEM

CARTRIDGE

TYPE	Shure Dynetic variable reluctance
FREQUENCY RESPONSE.	20 to 20,000 Hz
CHANNEL SEPARATION.	25 db @ 1,000 Hz
NOMINAL COMPLIANCE.	7.5×10^{-6} cm/dyne
TRACKING FORCE	4 grams
OUTPUT	7 mv.
STYLUS	0.7 mil, diamond

PREAMPLIFIER AND AMPLIFIER

POWER OUTPUT PER CHANNEL	25 watts rms (70-volt output)
SIGNAL INPUT FOR FULL UNDISTORTED OUTPUT	0.8 to 1.1 volts
MINIMUM INPUT IMPEDANCE	100K ohms
DISTORTION AT FULL OUTPUT.	less than 2% @1,000 Hz
FREQUENCY RESPONSE.	20 to 20,000 Hz - 3 db
HUM AND NOISE	60 db from signal level
AVC CONTROL RANGE	40 db
TREBLE CONTROL	12 db/octave 10,000 Hz full 6,000 Hz moderate 3,000 Hz low
BASS CONTROL	Compensates for bass loss at low volume levels 12 db per octave

SELECTION SYSTEM

CAPACITY 200 selections

TRANSFORMER PACKAGE (100 WATT AMPLIFIER ONLY; INTEGRAL PART OF 50 W AMPLIFIER)

POWER LEVELS FOR PHONOGRAPH SPEAKERS 0.3, 1.5, 6, 24 watts
 PROVIDES 70-VOLT LINE FOR EXTENSION SPEAKERS

SPEAKER SYSTEM

	LOW FREQUENCY	MID FREQUENCY	HIGH FREQUENCY
SPEAKER DIAMETER	10 inches	6 inches	3 inches
VOICE COIL DIAMETER	1-1/2 inches	1 inch	9/16 inch
IMPEDANCE	15 ohms	10 ohms	10 ohms
CROSSOVER	350 Hz	3,000 Hz	
SYSTEM FREQUENCY RESPONSE	50 to 17,000 Hz		

LIGHTING

SELECTOR	Fluorescent, 19 watts, 26 inches, (2) 707-00601
TITLE PANEL	Fluorescent, 25 watts, 33 inches, 706-00601
FRONT DOOR	Fluorescent, 25 watts, 33 inches, 706-00601
CREDIT WINDOW	Incandescent, No. 755, (2)

FUSES

JUNCTION BOX

30 VAC CIRCUIT	6-1/4 amp, MDL Fusetron, 721-00721
120 VAC CIRCUIT	8 amp, GLH Fusetron, 702-00720
30 VDC CIRCUIT	8/10 amp, MDL Slo-Blo Fusetron, (2) 716-00721
6 VAC CIRCUIT	8/10 amp, MDL Slo-Blo Fusetron, (2) 716-00721

AMPLIFIER

Stereo 50W	
120 VAC CIRCUIT	2 amp, MDL, 707-00721
Stereo 100W	
120 VAC CIRCUIT	3.2 amp, GMZ, 200-11445
B+ CIRCUIT	2 amp, AGC, (2) 701-00720

CREDIT UNIT 6/10 amp, MDL Slo-Blo, 703-00721

