

SELECT-O-MATIC PHONOGRAPH, PFEAIU Models
- SPECIFICATIONS -

POWER REQUIREMENTS 120 volt, 60 cycle a.c.
 Phonograph with SSU2:
 Standby 150 watts, 2.1 amps.
 Operating 250 watts, 3.0 amps.

CABINET LIGHTING

One (1) 30-watt, 36-inch cool white fluorescent lamp
 Two (2) 30-watt, 36-inch black light fluorescent lamp
 Three (3) FS-4 Starters

LID KEY NUMBER F-336

SELECT-O-MATIC MECHANISM Type I33S4

TORMAT MEMORY UNIT Type 160TM3

RECORD TYPE 33-1/3 & 45 rpm; 7-inch diameter

RECORD CAPACITY 80 records (160 selections)

PICK-UP Seeburg Stereophonic High Fidelity
 Magnetic with two Diamond Styli.

PHONOGRAPH SPEAKERS

Two 12-inch low frequency
 Six 5-inch high frequency

STEREO NETWORK Type SN-9

CABINET FINISH High pressure Decarlite
 phenolic laminate, slate-blue color; bright chrome
 grilles.

UNIVERSAL DUAL PRICING UNIT Type UDFU4

TRANSISTORIZED STEREO AMPLIFIER.... Type TSA4


TORMAT ELECTRICAL SELECTOR.. Type TES1610-56

SOLID STATE CONTROL CENTER Type SCC3

45 rpm. TRANSISTORIZED AUTO-SPEED UNIT
 Type 45TASU2

FUSES:

1 - 15 amp. (Solid State Control Center)
 1 - 1½ amp. (Solid State Control Center)
 1 - 1/8 amp. (Solid State Control Center)
 1 - 5 amp. Pigtail (Select-O-Matic Mechanism)
 1 - 8/10 amp. Slo Blo (Trans. Stereo Amplifier)
 1 - ½ amp. Slo Blo (Universal Dual Pricing Unit)
 1 - 1.6 amp. Slo Blo (Universal Dual Pricing Unit)
 1 - 6¼ amp. (Power Junction Unit)

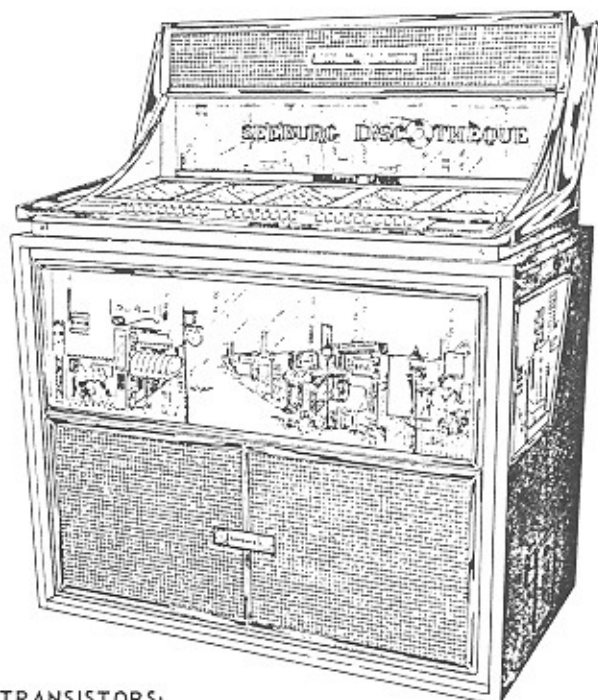
TRANSISTORS:
Transistorized Stereo Amplifier

4 - 309412 (PNP) 2 - 309418 (NPN)
 2 - 309413 (PNP) 2 - 309419 (PNP)
 4 - 309414 (PNP) 2 - 309420 (PNP)
 2 - 309421 (PNP)

Transistorized Auto-Speed Unit

2 - 309422 (PNP)

SILICON CONTROLLED SWITCH & ZENER DIODES
Solid State Control Center

1 - 309375 (Zener Diode) (27 volt)
 1 - 309376 (Zener Diode) (150 volt)
 1 - 309377 (Silicon Controlled Switch)


DIMENSIONS and WEIGHTS

Height 49½ inches
 Width 40½ inches
 Depth 26¼ inches
 Net Weight 365 pounds
 Shipping Weight 400 pounds

ACCESSORIES

Solid State Stepper Kit Type SSU2K
 (Part No. 509370) (60 cycles)
 Solid State Stepper Kit Type SSU2K-5
 (Part No. 509371) (50 cycles)
 Discotheque Dance Conversion Kit Type DDCK3
 (Part No. 509715)

SELECT-O-MATIC PHONOGRAPH, Model PFEA1U

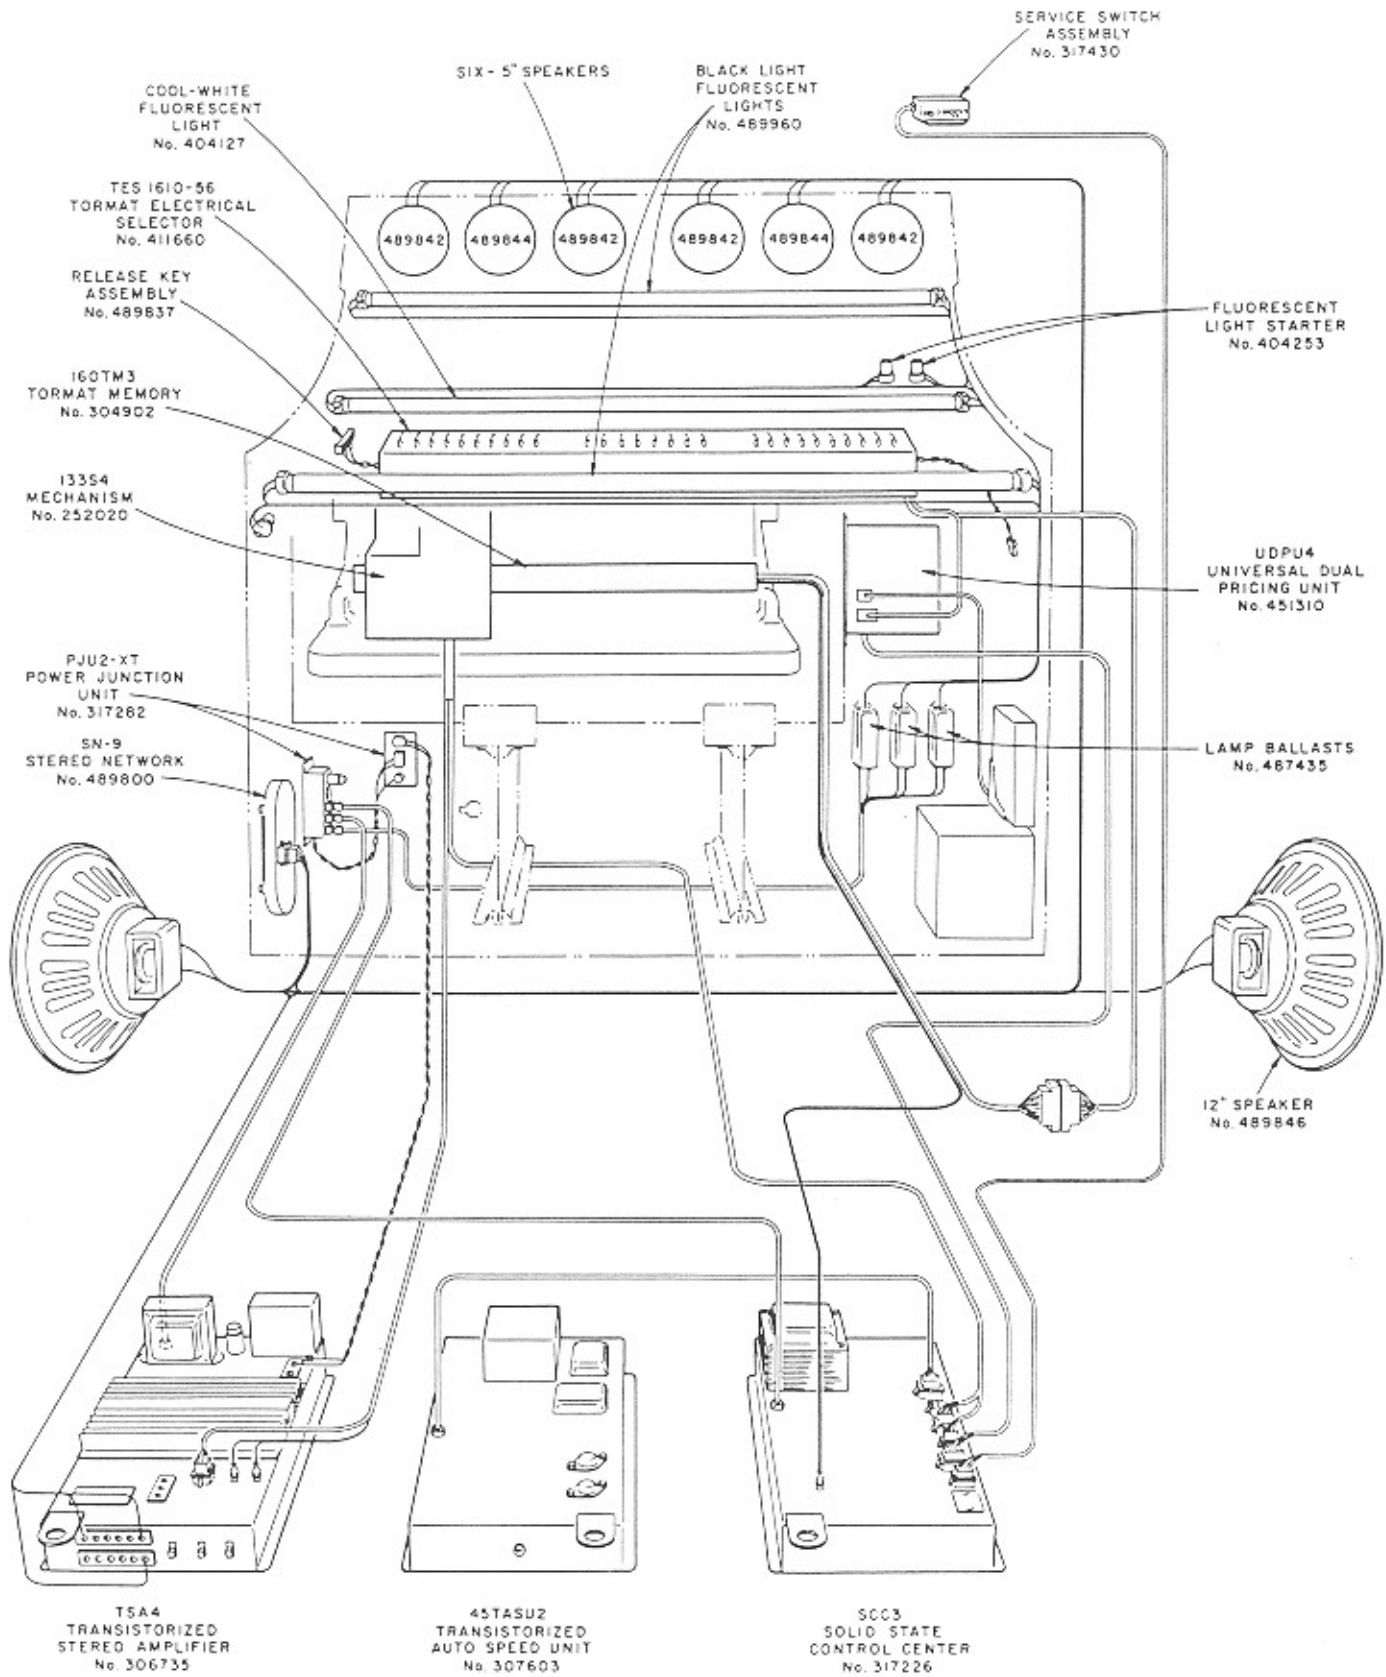

Cabinet Cabling Diagram, PFEA1U Model.