



# INDEX

## SELECT-O-MATIC DS100 AND DS160 MODELS

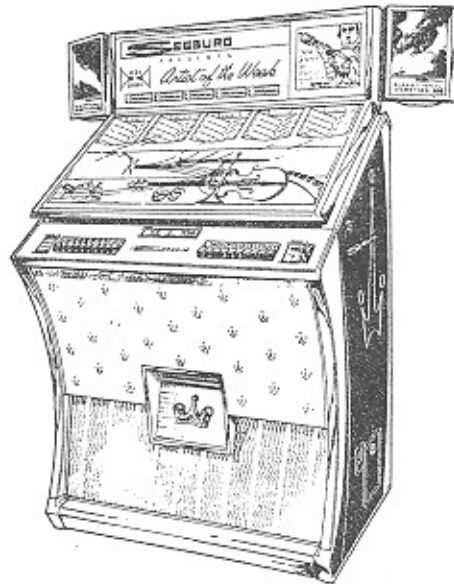

DS100

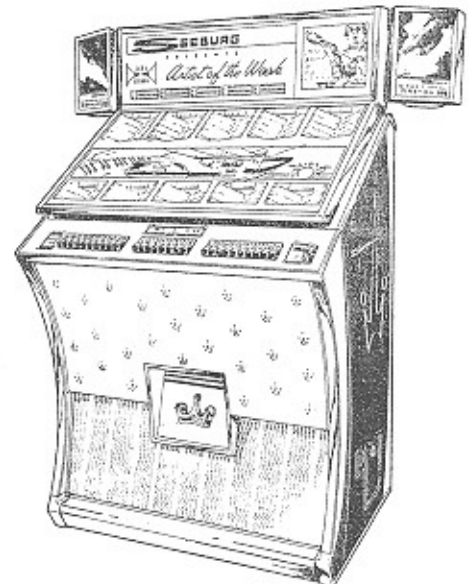

DS160


SPECIFICATIONS .....	1431
ADJUSTMENTS	
Auto-Speed Unit - Transistorized, TASU2..	13031
Coin Switches .....	1434
Electrical Selectors, DS100 Models .....	3166
Electrical Selectors, DS160 Models .....	3170
Mechanism .....	2427J
Pricing Unit - Universal .....	16042
Step Switch .....	16031
ASSEMBLY DATA	
Cam and Gear Segment .....	2430
Clamp Arm .....	2432
Clutch .....	2433
Transfer Arm .....	2432
Turntable, Shaft and Gear .....	2431
LUBRICATION CHART .....	2468A

### DIAGRAMS


Amplifier, Type SHFA5 .....	4097
Auto-Speed Unit - Transistorized .....	13033
Auto-Speed Unit Power & Control Wiring....	13030
Credit System .....	1442
Cabinet Cabling .....	1433
Electrical Selector (Tormat), TES108 .....	3168
Electrical Selector (Tormat), TES168 .....	3175
Junction Unit (Tormat) .....	13037
Mechanism .....	2468E
Pricing Unit - Universal .....	16047
Read-Out Circuits .....	1439
Remote Control Stepper Unit .....	13037
Selector Unit (Tormat) .....	13036
Speaker Circuits .....	1434
Trip and Sensing Circuits .....	1440
Volume Control, Powered Remote, PRVC2...	8033
Write-In Circuits:	
DS100 .....	1436
DS160 .....	1437

# SEEBURG

## SELECT-O-MATIC DS100 AND DS160 MODEL PHONOGRAPHS

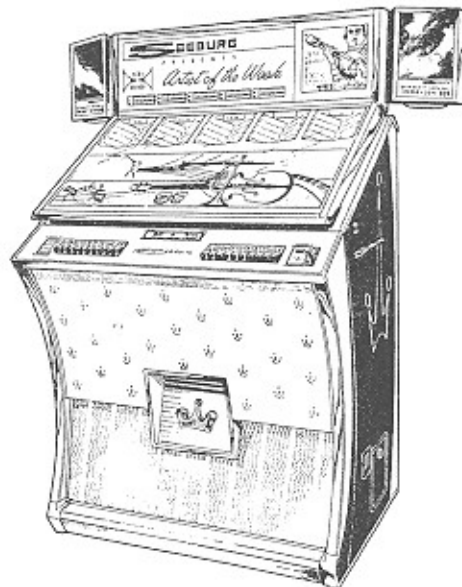

DS100

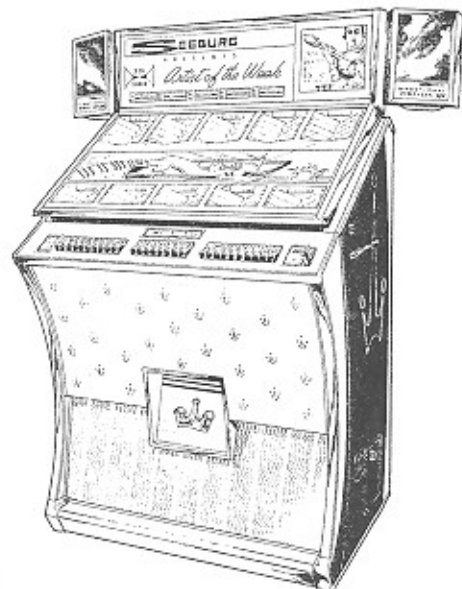

DS160

### - SPECIFICATIONS -

#### POWER REQUIREMENTS

117 volts A.C., 60 cycles  
Phonograph with RCSU3

Standby ..... 217 watts  
Operating ..... 485 watts

#### CABINET LIGHTING

25 watt, 28 inch cool white fluorescent lamps  
(FS25 starter)

CABINET KEY NUMBER ..... F264

#### RECORD CAPACITY

DS160H, DS160HR ..... 80 records (160 selections)  
DS100H, DS100HR ..... 50 records (100 selections)

#### RECORD TYPE

45 rpm, 7 inch diameter or 33-1/3 rpm, 7 inch dia.

PICKUP ..Seeburg Stereophonic High Fidelity Magnetic

#### PHONOGRAPH SPEAKERS

Two heavy duty 12 inch speakers  
Two 7 X 5 inch directional stereo speakers

FINISH .... Metallic charcoal - off-white - metallic blue

#### REMOTE SPEAKERS

Twin stereo speakers,  
Types TW1-8, TR1-8, EBWC1-12

#### FUSES

1 - 5 amp. Type MTH (Tormat Selector Unit)  
1 - 3.2 amp. Type GMQ 3-2/10 (Remote Control  
Stepper Unit)  
1 - 5 amp. Pigtail Fuse, Type HJV (Select-O-Matic  
Mechanism)  
1 - 1/2 amp. Slo Blo (Universal Pricing Unit)  
1 - 1-6/10 amp. Slo Blo (Universal Pricing Unit)

#### DIMENSIONS


	DS160	DS100
Height .....	56½ inches	56½ inches
Width .....	32½ inches	32½ inches
Depth .....	24½ inches	24½ inches
Net Weight .....	325 pounds	312 pounds
Shipping Weight .....	360 pounds	347 pounds

SELECT-O-MATIC DS100 and DS160 MODELS

- COMPONENTS ASSEMBLY CHART -

MODEL	DS160	DS100
Select-O-Matic Mechanism	160ST7	145ST9
Tormat Memory Assembly	160TM1	100TM3
Coin Equipment	Universal Pricing Unit, USPU1 5-10-25-50 cent	
Audio Amplifier (Stereo) Tubes and Transistors	SHFA5 2-6EU7                      4 - 6973 2-7199                      1 - 5U4GB 2-2N591	
Tormat Selection Unit Tubes	TSU7 with TJU3                      with RCSU3 1 - 6 X 4                      1 - 6 X 4 2 - OA2                      2 - OA2 1 - 2050                      2 - 2050 1 - 12AX7                      1 - 12AX7	
Auto-Speed Unit Transistors	33-1/3 TASU2-5 code B 1 - 2N1039-1                      1 - 2N1370 2 - 2N1531                      1 - 2N1530	
Accessory Equipment Kits	508890: PRVC2 Powered Remote Vol. Control 508930: RCSU3 Remote Control Stepper Kit 451025: Dual Pricing Kit	

SELECT-O-MATIC DS100 and DS160 MODELS

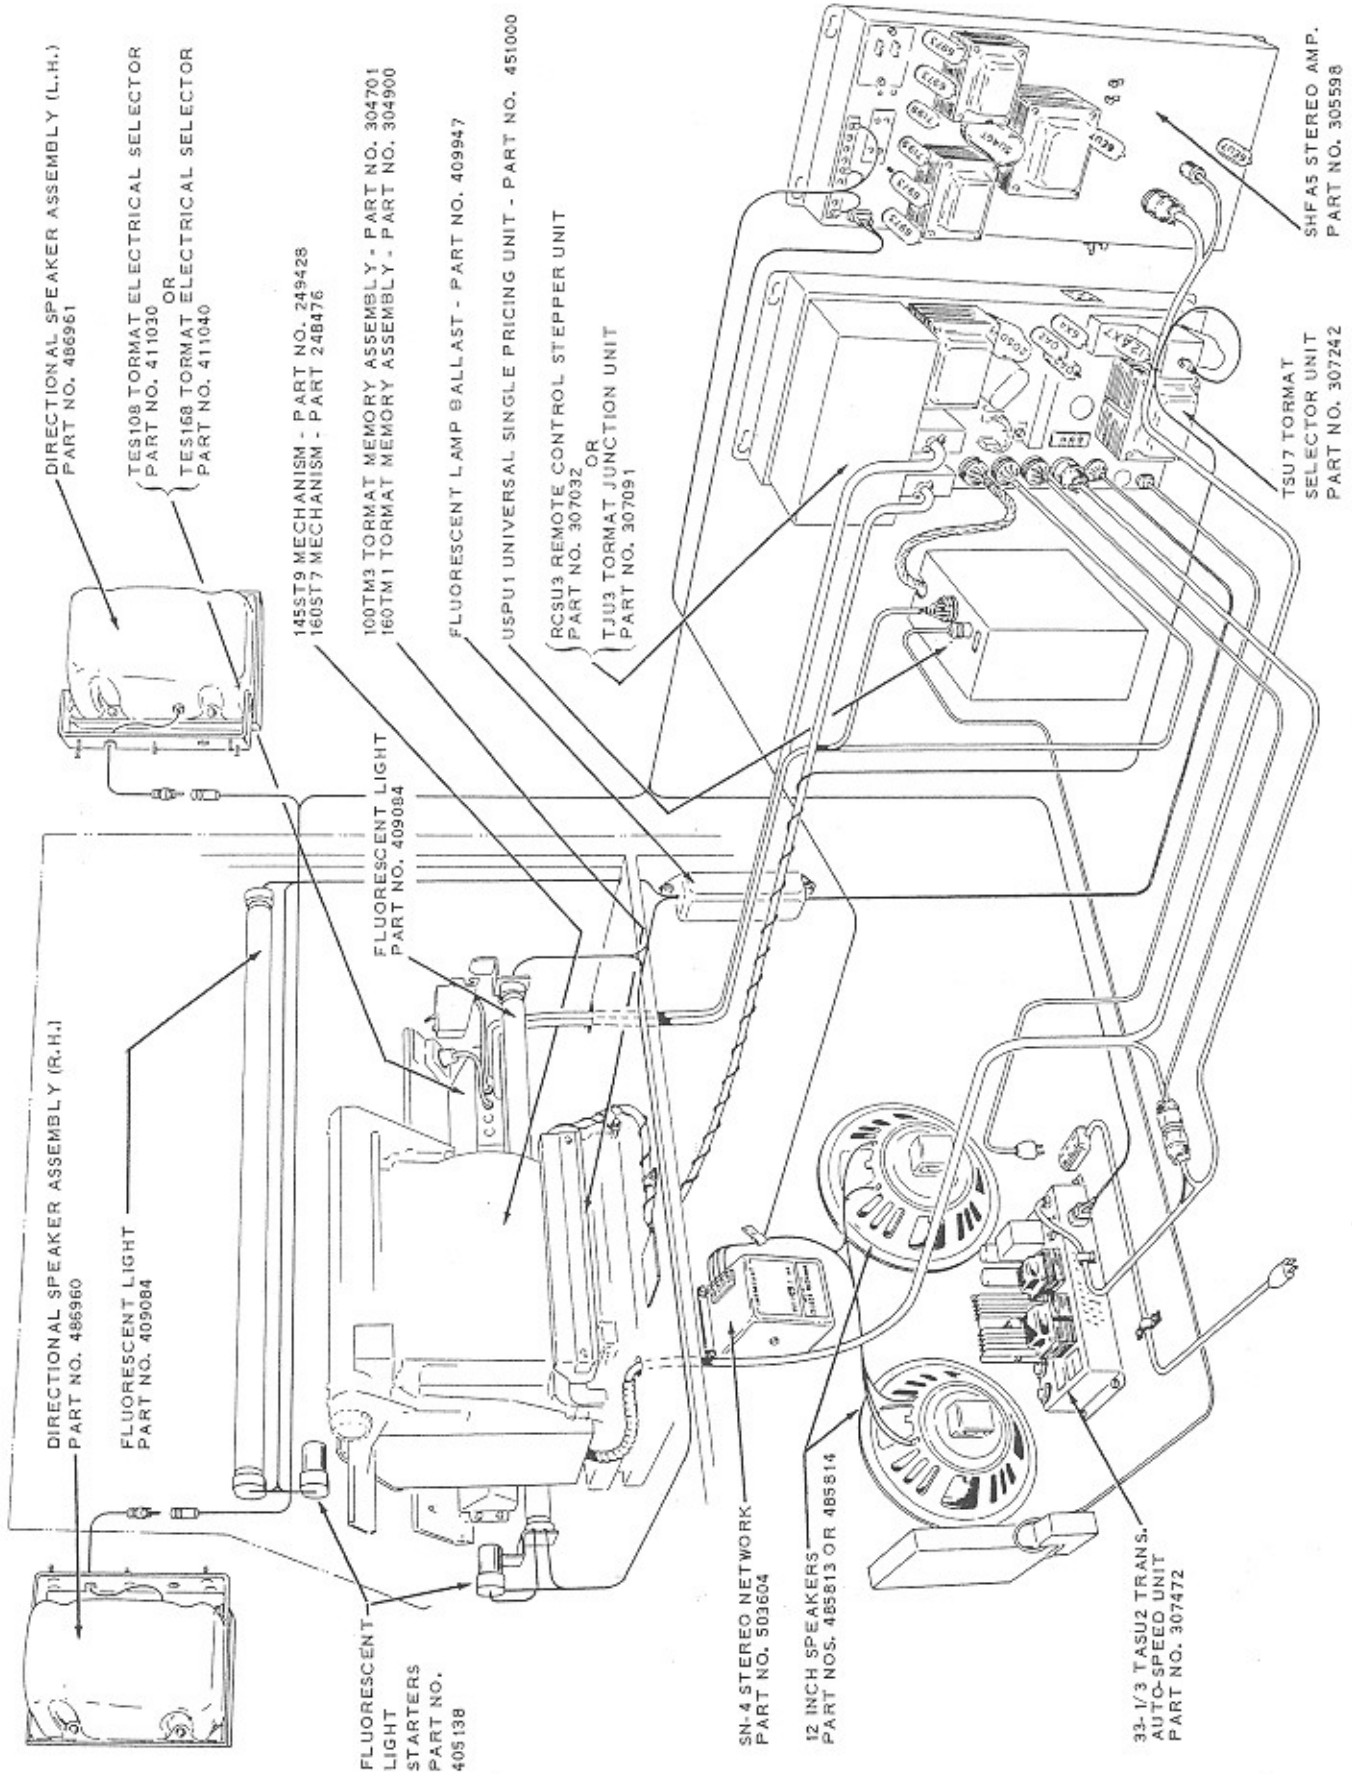

Cabinet Cabling and Components Diagram.