



Electronic Servicing

Formerly PF Reporter


Franchise-
another
approach
to
servicing

page 10



Test
equipment
available
for
servicing
TV page 44

IA 86 413 571
SAMUEL SACHS
809 BERGEN ST.
PHILADELPHIA, PA. 19111

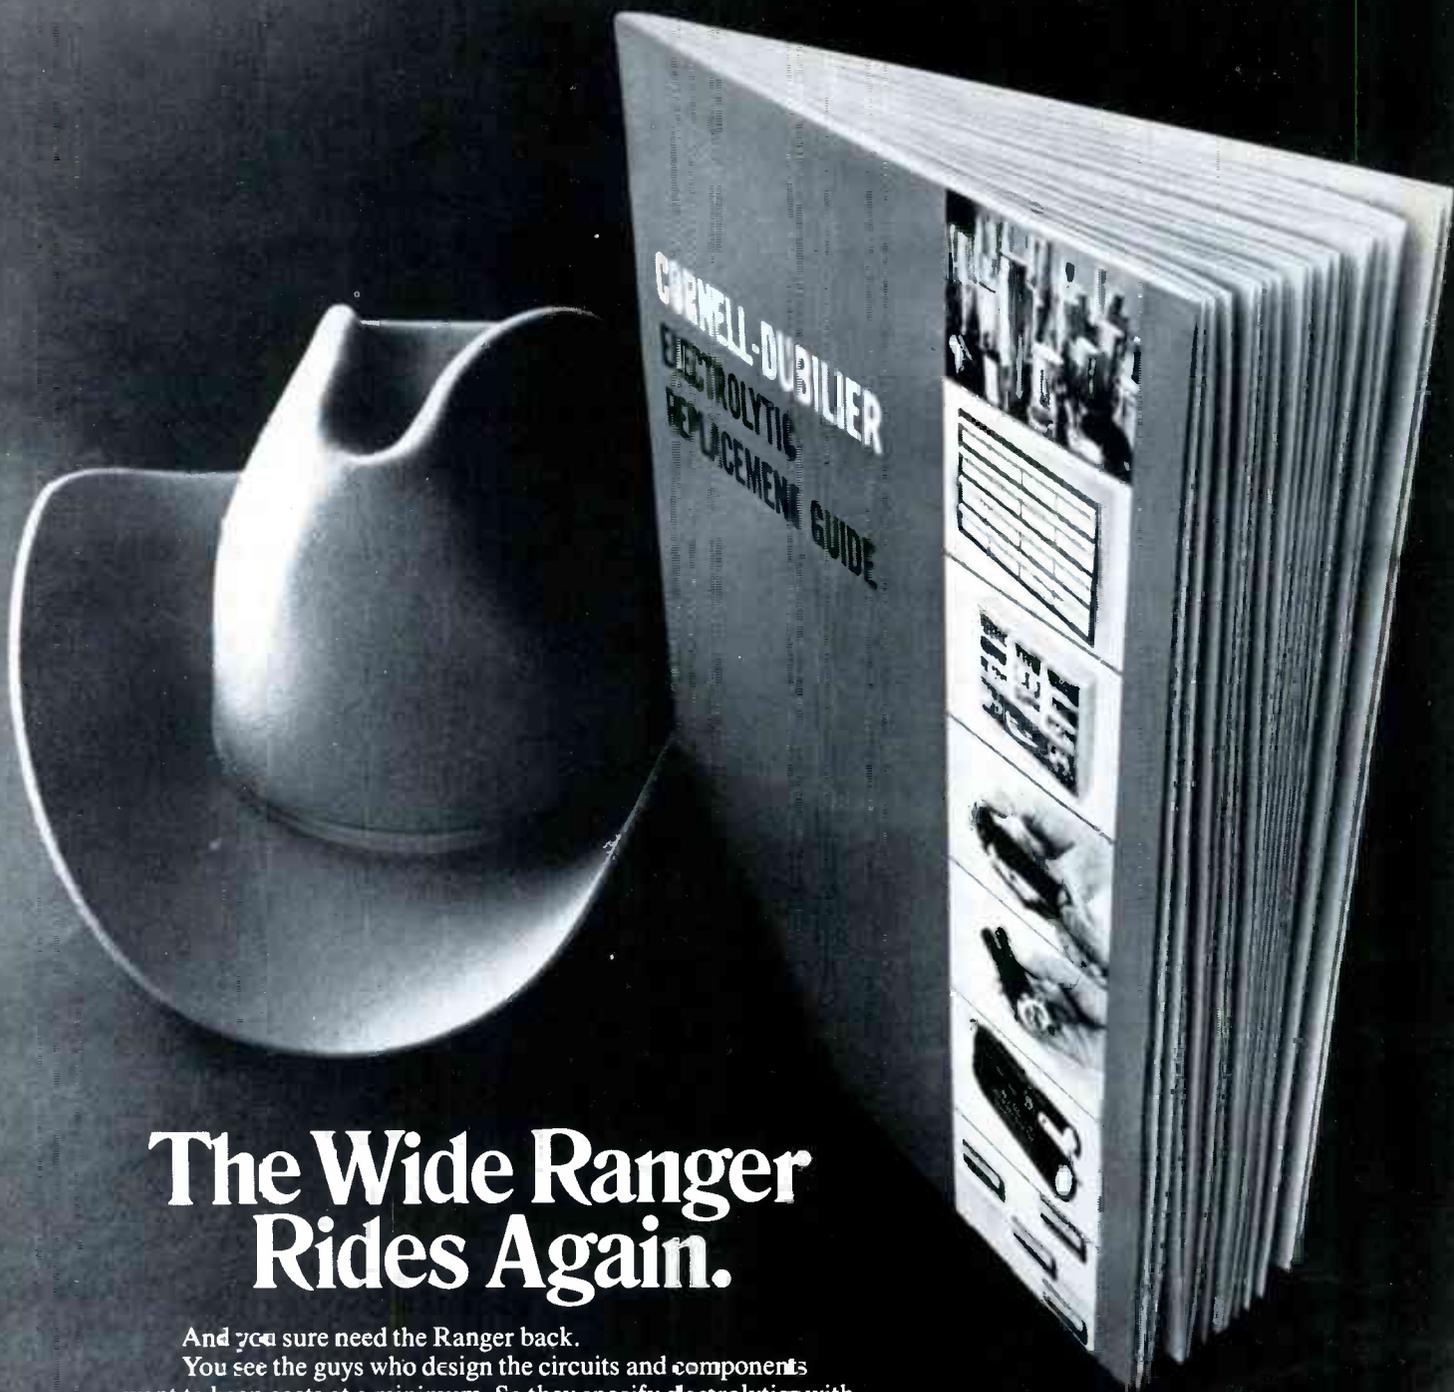

The Wide Ranger Rides Again.

And you sure need the Ranger back.

You see the guys who design the circuits and components want to keep costs at a minimum. So they specify electrolytics with the minimum capacity and voltage to do the job.

And that's the trouble. That's why there are thousands of different sizes and ratings for twist prong capacitors.

Then there's the label problem. The manufacturers meet the broad standard tolerances laid down by E. I. A. But it's not possible to build these capacitors to very close tolerances. So most capacitors are made to exceed the capacity shown on the label.

For example, a capacitor marked 100 mfd. at 300 volts could in fact measure from 90 mfd. to 200 mfd. and still be within tolerance.

So we decided to make things a little simpler. We examined over 20,000 capacitors and put together a new line of 248 Wide Range Twis: Prongs that can replace 97% of all electrolytics you're ever going to come across.

And they're all listed in the new Cornell-Dubilier Electrolytic Replacement Guide. Plus a complete listing of the line by voltage and capacities; a complete reference to major competitors' products; 100% reference to all color TV chassis original manufacturers' part numbers and a cross reference to major black and white TV chassis. Write today for your free copy.

CDE CORNELL-DUBILIER

Circle 1 on literature card

www.americanradiohistory.com

The Seven-Year Itch.

Remember when we introduced you to our Television Analyst (model 1076)? That was over seven years ago, and she's still the only diagnostic tool of her kind. But now there's a new number. A smart looking, professional model (1077) with designs on your heart.

Sure your old model still works. Why not? It was made by B&K.

But, of course, she can't do some of the groovy things the new model can do. Like testing TV sets with UHF. And testing transistorized TV sets with complete safety by matching the impedances of transistorized circuitry.

The 1077 analyzes every stage in color and black-and-white TV sets—without external scopes or wave-form interpretation. And

she does it with a standard test pattern (or special pattern slide transparencies for color circuitry), all of which we supply. She does it all: from antenna input terminals to the grid of the picture tube, using the unique B&K signal substitution technique.

When you do get together with our Television Analyst, she'll eliminate those hours you wasted on tough dogs, intermittents and general TV troubleshooting. (Hours for which you often don't charge the customer.)

Here are some more of her good points: VHF and all UHF RF channels; IF; video; sync; chroma;

audio; bias supply; AGC keying pulse; and signals for complete analyzing of sweep circuitry, including flyback yoke test, and horizontal and vertical driving signals.

Got the itch? Contact your distributor for complete details on how to start a new life with a Television Analyst. Or write for Bulletin 1077.

Model 1077. Net \$379.95



A Division of DYMASCAN CORPORATION
1801 W. Belle Plaine - Chicago, Illinois 60613
Where electronic innovation is a way of life.



Circle 2 on literature card

Electronic Servicing

Formerly PF Reporter

in this issue...

8 NARDA Convention—What was said about servicing at the National Appliance and Radio-TV Dealers Association's annual convention.

10 Franchise Service System—Another Approach to Servicing—Second in a series of articles reporting on different ways of conducting a service business. **by Wendall Burns and J. W. Phipps.**

22 The In-Circuit Transistor Tester—A Time Saver—An understanding of the basic circuitry and operation of this instrument, together with a working knowledge of transistor parameters, can reduce your solid-state servicing time. **by James Smith.**

30 Practical Stereo FM Servicing, Part 5—The final installment in this series discusses performance tests of cartridges and turntables. **by Robert G. Middleton.**

38 A Look at RCA's Solid-State Color, Part 4—A description of the horizontal AFC, oscillator and output stages concludes the analysis of RCA's CTC40 chassis. **by Ellsworth Ladyman.**

44 Test Equipment Available for TV Servicing—This representative list of currently available test instruments will help you determine if your own inventory needs updating.

DEPARTMENTS

The Electronic Scanner 4	Photofact Bulletin 65
Letters To The Editor 16	Notes On Test Equipment . . 66
The Troubleshooter 62	Product Report 68
Tube Substitution	Advertisers' Index 71
Supplement 63	Catalog and Literature . . . 72

Second class postage paid at Kansas City, Mo. and additional mailing offices. Published monthly by INTERTEC PUBLISHING CORP., 1014 Wyandotte St., Kansas City, Mo. 64105. Vol. 19, No. 3. Subscription rates \$5 per year in U. S., its possessions and Canada; other countries \$6 per year.

Copyright, 1969, Howard W. Sams Co., Inc. All Rights Reserved. Material may not be reproduced or photocopied in any form without written permission of publisher.

EDITORIAL

GEO. H. SEFEROVICH, Director
J. W. PHIPPS, Managing Editor
ELLSWORTH LADYMAN, Associate Editor
WENDALL BURNS, Business Operations Editor
B. J. MILLER, Editorial Assistant
DUDLEY ROSE, Art Director
LEILA JOHNSON, Assistant Artist

TECHNICAL CONSULTANT

JOE A. GROVES

EDITORIAL ADVISORY BOARD

LES NELSON, Chairman
Howard W. Sams & Co., Indianapolis

CIRCULATION

R. VINCENT WARD, Director
EVELYN RODGERS, Manager

ADVERTISING SALES

Kansas City, Missouri 64105
Tele: 913/888-4664
E. P. LANGAN, Director
R. JACK HANCOCK, Manager
S. F. WILSON, Production
LEE MILLER, Promotion

REGIONAL ADVERTISING SALES OFFICES

Indianapolis, Indiana 46206
ROY HENRY
Howard W. Sams & Co., Inc.
4300 W. 62nd St.
Tele: 317/291-3100

New York, New York 10019
ALFRED A. MENEGUS
3 W. 57th St.
Tele: 212/688-6350

Mission, Kansas 66208
JAKE STOCKWELL
C. H. Stockwell Co.
4916 W. 64th St.
Tele: 913/722-4417

Los Angeles, California
THE MAURICE A. KIMBALL CO., INC.
2008 Carson St., Suites 203-204
Torrance, California 90501

San Francisco, California 94104
THE MAURICE A. KIMBALL CO., INC.
580 Market Street, Room 400
Tele: 415/392-3365

London W. C. 2, England
JOHN ASHCRAFT & CO.
12 Bear Street
Leicester Square
Tele: 930-0525

Amsterdam C. Holland
JOHN ASHCRAFT & CO.
W.J.M. Sanders, Mgr.
for Benelux & Germany
Herengracht 365
Tele: 020-240908

Paris 5, France
JOHN ASHCRAFT & CO.
9 Rue Lagrange
Tele: 033-2087

Tokyo, Japan
INTERNATIONAL MEDIA
REPRESENTATIVES LTD.
1, Shiba-Kotohiracho, Minatoku
Tele: 582-8741



ELECTRONIC SERVICING (with which is combined PF Reporter) is published monthly by Intertec Publishing Corp., 1014 Wyandotte Street, Kansas City, Missouri 64105.

Subscription Prices: 1 year—\$5.00, 2 years—\$8.00, 3 years—\$10.00, in the U. S. A., its possessions and Canada.

All other foreign countries: 1 year—\$6.00, 2 years—\$10.00, 3 years—\$13.00. Single copy 75¢; back copies \$1.



Robert E. Hertel, Publisher
Intertec Publishing Corp.
Subsidiary of Howard W. Sams & Co., Inc.



OVERHAUL

\$975

GUARANTEED for 1 Year

OVERHAUL \$9.75 • REPLACEMENT TUNERS... \$10.45

Nine-seventy-five buys you a complete tuner overhaul—including parts (except tubes or transistors)—and *absolutely no hidden charges*. All makes, color or black and white. UV combos only \$15.

Guaranteed means a full 12-month warranty against defective workmanship and parts failure due to normal usage. That's 9 months to a year better than others. And it's backed up by the only tuner repair service authorized and supervised by the world's largest tuner manufacturer—Sarkes Tarzian, Inc.

Four conveniently located service centers assure speedy in-and-out service. All tuners thoroughly cleaned, inside and out... needed repairs made... all channels aligned to factory specs, then rushed back to you. They look—and perform—like new.

SEND ORDERS FOR UNIVERSAL AND CUSTOMIZED REPLACEMENT TUNERS TO OUR OFFICE IN INDIANAPOLIS.

Prefer a universal replacement? Sarkes Tarzian will give you a universal replacement for only \$10.45. This price is the same for all models. The tuner is a new tuner designed and built specifically by Sarkes Tarzian for this purpose. It has memory fine tuning—UHF plug-in for 82 channel sets—universal mounting—hi-gain—lo-noise.

ORDER TUNERS BY PART NUMBER, AS FOLLOWS:

Part #	Intermediate Frequency	AF Amp Tube	Osc. Tube	Mixer Heater
MFT-1	41.25 mc Sound 45.75 mc Video	6GK5	6LJ8	Parallel 6.3V
MFT-2	41.25 mc Sound 45.75 mc Video	3GK5	5LJ8	Series 450 MA
MFT-3	41.25 mc Sound 45.75 mc Video	2GK5	5CG8	Series 600 MA

Prefer a customized replacement tuner? The price will be \$18.25. Send us the original tuner for comparison purposes, also TV make, chassis and model numbers.



TUNER SERVICE CORPORATION *FACTORY-SUPERVISED TUNER SERVICE*

- MIDWEST** 817 N. PENNSYLVANIA ST., Indianapolis, Indiana TEL: 317-632-3493
(Home Office)
- EAST** 547-49 TONNELE AVE., Jersey City, New Jersey TEL: 201-792-3730
- SOUTH-EAST** 938 GORDON ST., S. W., Atlanta, Georgia TEL: 404-758-2232
- WEST** SARKES TARZIAN, Inc. TUNER SERVICE DIVISION
10654 MAGNOLIA BLVD., North Hollywood, California TEL: 213-769-2720

WATCH FOR NEW CENTERS UNDER DEVELOPMENT

Circle 3 on literature card

Ohio Serviceman Selected for NEA Electronic Hall of Fame

John Graham, member of the Associated Radio and Television Service Dealers (ARTSD) of Columbus, Ohio, has been selected as a member of the National Electronic Associations' (NEA) Electronic Hall of Fame, Service Division. Mr. Graham is the first living member to be so honored.

Selections to NEA's Electronic Hall of Fame are made from among living and deceased men who have made outstanding contributions within the electronic industry.

Plans are currently being made to erect a building to house the awards. Howard W. Sams & Co., Indianapolis, has offered to house the display until a permanent site is made available.

—ARTSD News

New York State Again Tries TV Licensing

A bill for the licensing of TV technicians has been introduced to the New York State legislature for the fourth time according to a report in Home Furnishings Daily. Three previous attempts at licensing New York State TV technicians have failed. Increased consumer criticism of television servicing is given as the reason for introduction of the bill. According to informed sources, the bill has dim prospects for passage, although the National Electronics Association (NEA) has voiced approval of "the proper licensing of TV technicians."

NATESA Revises Code-of-Ethics Certificate and Assumes Arbitrator Role

The National Alliance of Television and Electronic Service Associations (NATESA) has updated its code of ethics and issued to its members new certificates of membership that indicate the member is a licensed "Electronician." Each certificate bears the name and license number of the member. The term "Electronician" is registered by NATESA in Washington, D.C.

NATESA is also offering set owners a method of recourse concerning complaints against members. According to NATESA, "When a complaint is received, it will be processed and evaluated by NATESA people in the area. If the customer is in error, he will be so informed and given a full explanation. If the licensed NATESA member is at fault, he will be so appraised and billed for service necessary to make correction. Failure to pay this invoice will be cause for revocation of membership."

RCA Reduces Color Service Contracts

RCA is planning to eliminate home setups on new color sets, unless dealers specifically request that this procedure be continued, according to a recent report by Fairchild News Service.® "Improved quality of color sets" was given as the reason for doing away with home color setups.

A price reduction of color TV service contracts has also been announced by RCA Service Co. Price cuts range from 7 dollars on portables to 4 dollars on combination units.

American TV Manufacturers Interested in Single-Gun Color Tube

Sony Corporation's Trinitron single-gun color TV system has caught the interest of both American and Japanese television manufacturers, who, according to a recent report in Home Furnishings Daily, have made inquiries concerning licensing arrangements. However, according to the report, Sony has made no decision as to when licensing will begin.

Trade sources report that Sylvania, Motorola, Zenith and RCA have indicated their interest in the Trinitron system.

When the Sony single-gun system was first introduced, it was explained that the new color tube could be used with Chromatron grid, the conventional shadow mask, or the new aperture grill.

It is expected that full U.S. distribution of a 12-inch Sony color set using the Trinitron picture tube will be a reality later this year.

Preliminary EIA Home Electronics 1968 Sales Figures Show Increases

Based on preliminary statistics gathered by the Electronic Industries Association's Marketing Services Department, EIA's Consumer Products Division has announced that 1968 year-end figures on sales by domestic manufacturers of television, radio (including auto), phonograph and tape equipment all showed increases over 1967 sales.


1968 CONSUMER ELECTRONICS SALES TO DEALERS*

RADIO:	1968	1967	% Change
Home	11,810,646	12,393,051	- 4.7
Auto	10,685,827	8,900,208	+ 20.1
Total Radio	22,496,473	21,293,259	+ 5.7
TELEVISION:			
Color	5,829,150	5,224,499	+ 11.6
Monochrome	5,555,339	5,434,702	+ 2.2
Total TV	11,384,489	10,659,201	+ 6.8
PHONOGRAPH:			
Portable & Table	3,946,001	3,766,541	+ 4.8
Console	1,565,373	1,498,645	+ 4.5
Total Phonograph	5,511,374	5,265,186	+ 4.7

*Preliminary figures. These data reflected total U.S. manufacturers' sales, including foreign-made sets sold under U.S. manufacturers' brand names.

While the statistics shown here are based on U.S. manufacturers' sales to dealers, imports—both domestic and foreign brand names—are a sizeable factor in the total U.S. Market consumption of consumer electronic products, EIA said.

EIA estimates that the total television market, including imports, will exceed 12 million units; that 1968 radio sales will be over 40 million units, counting home and auto figures; that phonograph sales will exceed 6 million units; and that tape equipment sales, the fastest growing consumer electronic product (including reel-to-reel, cartridge and cassette equipment) will exceed 5 million units.

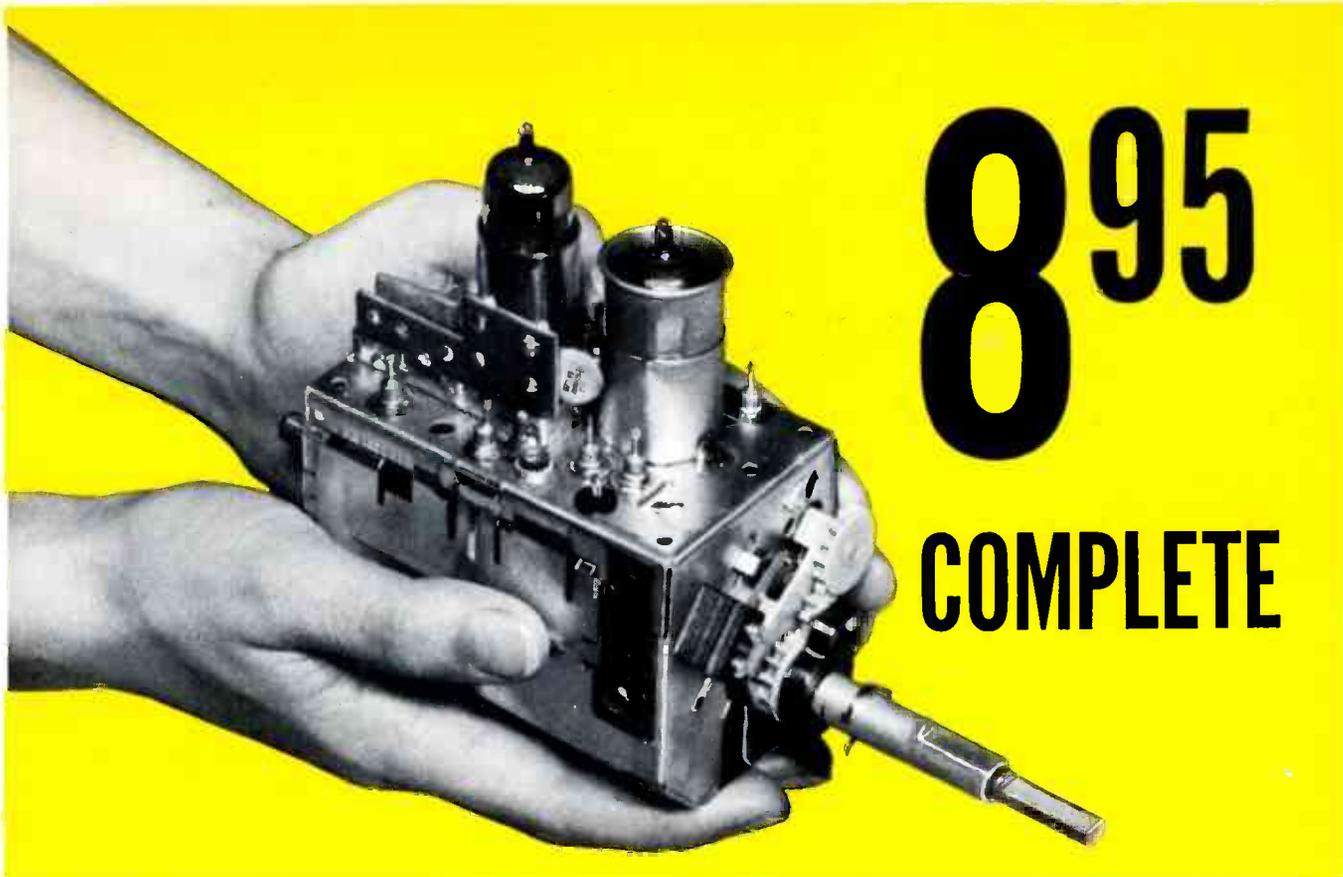

Castle, the pioneer of television tuner overhauling, offers the following services to solve ALL your television tuner problems.

● **OVERHAUL SERVICE** — All makes and models.

- VHF or UHF tuner \$9.95
- UHF-VHF combination (one piece chassis) \$9.95
- TRANSISTOR tuner \$9.95
- COLOR tuner \$9.95
(Guaranteed color alignment . . . no additional charge)

Overhaul includes parts, except tubes and transistors.

Simply send us the defective tuner complete; include tubes, shield cover and any damaged parts with model number and complaint. Your tuner will be expertly overhauled and returned promptly, performance restored, aligned to original standards and warranted for 90 days.

UV combination tuner must be single chassis type; dismantle tandem UHF and VHF tuners and send in the defective unit only.

And remember—for over a decade Castle has been the leader in this specialized field . . . your assurance of the best in TV tuner overhauling.

● **CUSTOM REPLACEMENTS**

Exact replacements are available for tuners that our inspection reveals are unfit for overhaul. As low as \$12.95 exchange. (Replacements are new or rebuilt.)

● **UNIVERSAL REPLACEMENTS**

Prefer to do it yourself?

Castle universal replacement tuners are available with the following specifications.

STOCK No.	HEATERS	SHAFT		I.F. OUTPUT		PRICE
		Min.*	Max.*	Snd.	Pic.	
CR6P	Parallel 6.3v	1¾"	3"	41.25	45.75	8.95
CR7S	Series 600mA	1¾"	3"	41.25	45.75	9.50
CR9S	Series 450mA	1¾"	3"	41.25	45.75	9.50
CR6XL	Parallel 6.3v	2½"	12"	41.25	45.75	10.45
CR7XL	Series 600mA	2½"	12"	41.25	45.75	11.00
CR9XL	Series 450mA	2½"	12"	41.25	45.75	11.00

*Selector shaft length measured from tuner front apron to extreme tip of shaft.

These Castle replacement tuners are all equipped with memory fine tuning, UHF position with plug input for UHF tuner, rear shaft extension and switch for remote control motor drive . . . they come complete with hardware and component kit to adapt for use in thousands of popular TV receivers.

Order universal replacements out of Main Plant (Chicago) only.



CASTLE TV TUNER SERVICE, INC.

MAIN PLANT: 5701 N. Western Ave., Chicago, Illinois 60645
EAST: 41-90 Vernon Blvd., Long Island City, N.Y. 11101

Circle 4 on literature card

To service Color TV you need:
 1. vectorscope
 2. color bar generator
**and you can't
 use one without
 the other!**



One Year
 Warranty

portable



for home
 or shop

only the V7 gives you both

- The only complete one unit color vectorscope/color-bar generator available anywhere!
- Completely portable for servicing color TV in the home . . . no need to bring set to the shop!
- The only one with detailed instructions on color circuit alignment and color adjustment. And, additional instructions are available as new sets are introduced!
- Recommended by leading TV manufacturers!
- Proven performance . . . over 4 years of use in field and shop by thousands of technicians . . . no other vectorscope manufacturer can make this claim!

V7 • Checks and aligns demodulators to any angle.
 • Checks and aligns bandpass-amplifier circuit.
 • Pinpoints troubles to a specific color circuit.

Exclusive Features: Self-Calibrating—adjust timing circuit without external test equipment, Dial-A-Line—adjust horizontal line to any width from 1 to 4. Plus: All Crosshatch, Dots, and Color Patterns; Voltage Regulated; Fully Enclosed Cable Compartment. Free copy of Wayne Lemon's Book, "Color TV Servicing Simplified with Vectorscope!" Net **18950**

Remember . . . V7—the complete one

See your distributor or write Dept. ES-3

LECTROTECH, INC.
 4529 N. Kedzie Ave., Chicago, Ill. 60625
 Circle 5 on literature card

Nebraska Association Re-elects President for '69

At a recent statewide meeting held in Grand Island, Nebr., the Nebraska Electronic Service Association (NESA) re-elected Charles Enyeary, CET of Lincoln, as president for 1969. Elected as secretary-treasurer was Loren Daubendiek, CET, of Beatrice.

Admiral Introduces 12-inch Color

The development and full production of a 12-inch color picture tube (79 square inches) for portable television sets has been announced by Admiral Corporation. The exclusive tube size will be incorporated in Admiral's new 12-inch color portables. Another exclusive tube size for 16-inch sets was introduced by Admiral last November.

Sony Adds New Service Point

A new facility for sales, warehousing and service for Sony home entertainment products has been opened at 54 Cypress Lane in Brisbane, California, a suburb of San Francisco.

TC Becomes CRYSTEK

The name of Texas Crystals, a division of Whitehall Electronics Corporation, is being changed immediately to CRYSTEK, according to an announcement by L. R. Sheeley, president of the Fort Myers, Florida firm. Sheeley explained that the name CRYSTEK stems from the words crystal technology, the specialized field of the company. The parent firm of CRYSTEK, Whitehall Electronics, is a subsidiary of LVT-Ling Altec of Dallas, Texas. ▲



Model AMP-25/2

**MATV DISTRIBUTION AMPLIFIER KIT
 for 75 Ohm Coax VHF Color/B&W TV**



A gold mine waits for the man who can insure quality TV reception in fringe reception areas. Now it's easy for you to work that mine. Mosley's new MATV Distribution Amplifier Kit contains in one package all the components for a two-outlet amplified system. Simple system design. Easy installation. Loss factors already figured for you. Write Dept. 180 for details.

Mosley Electronics, Inc. 4610 N. Lindbergh Blvd.,
 Bridgeton Missouri 63042


Circle 6 on literature card

The Single Source For Reliable Protection For Every Type Of Electronic And Electrical Circuit And Device

BUSS QUALITY

SMALL DIMENSION FUSES AND FUSEHOLDERS

Include dual-element "slow-blowing" fuses, single-element "quick-acting" fuses and signal or visual indicating type fuses . . . in sizes from 1/500 amp. up . . . PLUS: a companion line of fuseholders.

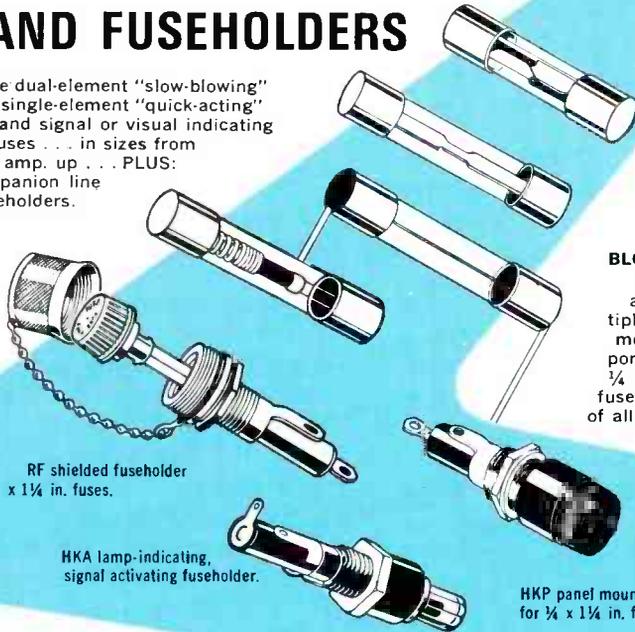

HMR RF shielded fuseholder for 1/4 x 1 1/4 in. fuses.

HKA lamp-indicating, signal activating fuseholder.

HKP panel mounted fuseholder for 1/4 x 1 1/4 in. fuses.

THE COMPLETE LINE OF SIGNAL-INDICATING ALARM-ACTIVATING FUSES

For use on computers, microwave units, communication equipment, all electronic circuitry.



BUSS GLD-1/4 x 1 1/4 in. Visual-Indicating, Alarm-Activating.

BUSS GBA-1/4 x 1 1/4 in. Visual-Indicating.



BUSS MIN-13/32 x 1 1/2 in. Visual-Indicating.

BUSS MIC-13/32 x 1 1/2 in. Visual-Indicating, Alarm-Activating.




FNA FUSETRON Fuse 13/32 x 1 1/2 in. slow-blowing, Visual-Indicating, Alarm-Activating. (Also useful for protection of small motors, solenoids, transformers in machine tool industry.)




BUSS Grasshopper Fuse, Visual-Indicating, Alarm-Activating.



BUSS ACH Aircraft Limiter, Visual-Indicating.



BUSS GMT and HLT holder, Visual-Indicating, Alarm-Activating.

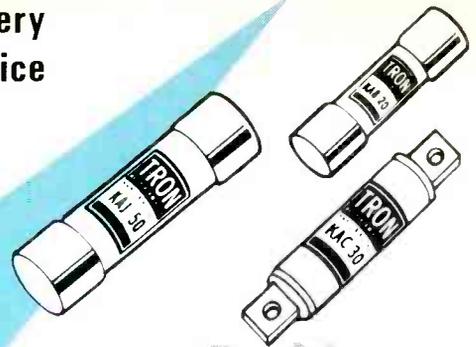


TRON Rectifier Fuses For the Safe Protection of Solid State Devices

Provide extremely fast opening on overload and fault currents, with a high degree of restriction of let-thru current. Many types and sizes available. Ampere ratings from 1/2 to 1000 in voltages up to 1500.


BLOCKS FOR BUSS FUSES

All types available for every application. Single pole, multiple pole, small base, full base, molded base, laminated base, porcelain base for fuses from 1/4 x 5/8 inches up. Also signal fuse blocks and special blocks of all types.

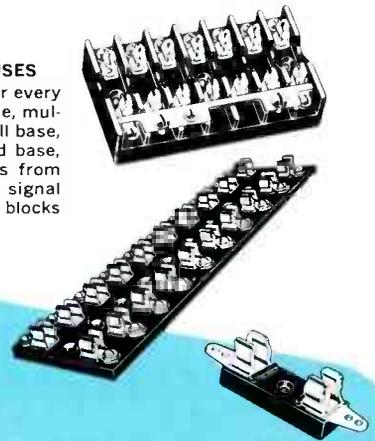


SUB-MINIATURE FUSES

Ideal for space tight applications, light weight, vibration and shock resistant. For use as part of miniaturized integrated circuit, large multi-circuit electronic systems, computers, printed circuit boards, all electronic circuitry.



TRON Sub-Miniature Pigtail Fuses - Body size only .145 x .300 inches. Glass tube construction permits visual inspection of element. Hermetically sealed. Twenty-three ampere sizes from 1/100 thru 15.

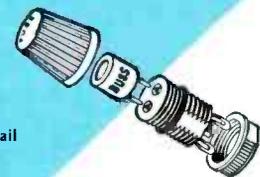

BUSS Sub-Miniature GMW Fuse and HWA Fuseholder. Fuse size only .270 x .250 inches. Fuse has window for visual inspection of element. Fuse may be used with or without holder. 1/200 to 5 amp. Fuses and holders meet Military Specifications.

FOR MORE INFORMATION ON THE COMPLETE BUSS LINE, WRITE FOR BUSS FORM SFB

BUSSMANN MFG. DIVISION, McGraw-Edison Co., St. Louis, Missouri 63107

SUPPLIED THE ECONOMICAL WAY . . . THRU DISTRIBUTORS

BUSS QUALITY

FUSES

FOR FUSES AND FUSEHOLDERS OF UNQUESTIONED HIGH QUALITY FOR EVERY PROTECTION NEED INSIST ON . . .

Circle 7 on literature card

NARDA Convention



**Put this E-V
needle/cartridge
display next to
your cash register
...it insures
good fortune!**

Put this handsome merchandiser with its stock of E-V literature on your counter. You've just taken the first step toward bigger phono needle & cartridge sales.

Now, take the second step. Let your E-V distributor help you fill it with the best-selling needles & cartridges in town.



Best-selling because the Electro-Voice computer prepares accurate, up-to-date popularity lists for your guidance. Easy-selling because all E-V needles and cartridges meet or exceed original equipment specifications for quality.

Your Electro-Voice distributor has the broadest line of exact-replacement phono parts in the business. Needles, cartridges, wheels and belts. Plus a merchandiser deal that helps you sell them. Start your good fortune today at your nearby E-V distributor's!

ELECTRO-VOICE, INC., Dept. 397R
632 Cecil St., Buchanan, Michigan 49107

Electro-Voice®

A SUBSIDIARY OF GULTON INDUSTRIES, INC.

The National Appliance & Radio-TV Dealers Assn. (NARDA), meeting for its annual convention in Tucson from Feb. 5-9, touched on several aspects of servicing the products its members sell.

The only session of the convention program specifically scheduled to treatment of service was a talk by George T. Stewart, executive vice-president of Toshiba America, Inc. He pointed to some changes that may be expected in the industry: "The growth of our industry has been in technology—in research and development. Emphasis has been on the product. But servicing may well draw ahead of 'product' in the years coming, and the independent retailer will be forced to pay attention to it."

Stewart said also that those undertaking service should take the initiative in establishing uniform pricing and quality standards for the servicing industry.

"We at Toshiba believe in letting the independents provide the service," declared Stewart. He went on to say that the manufacturers tend to become lax regarding product control if they have their own service units.

An unscheduled talk on servicing was given by Ed Reich, Wholesale TV, Indianapolis, Ind. He had been scheduled to talk about the type of merchandise that distributors should stock. Instead, he told the NARDA members of a few basic changes in managing his service business that

turned it from a financial loser during the fiscal year of 1968 to a profit making operation.

The principal changes Reich discussed were:

1. Upgrading the image of the technicians by changing his attire from the traditional service man's uniform to white shirt and tie and suit or sport coat; and, his title from service man to technician.
2. Changing the pricing system. In November, 1968 Reich adopted a flat rate schedule based on what it takes the average man to do a job, and reduced the price of the house call to \$6.95 from \$9.95. Previously, potential customers were lost when they learned that the price of the house call was \$9.95, he said. Three months after he adopted the changes, his firm was averaging \$16 gross per service call, was completing 100 or more service calls per day, and making a profit.

His new pricing system has been successful, Reich said, because "management explains it to the technicians and the technicians explain it to the customers." He added, "I have yet to have a complaint about the cost of repair."

The subject of service was mentioned in other sessions of the convention, with the emphasis put on the theory that service can be a profitable pursuit in its own right, as well as a means for retailers to secure customers for their whole goods. ▲

Service was the subject of this speaker at the convention of NARDA held at the Pioneer Hotel in Tucson. George T. Stewart, vice-president of Toshiba America, Inc., suggested that in the years ahead the manufacturers and retailers will give more attention to servicing the products they manufacture and sell.



At last! A practical way to provide servicing training right in your own shop.

ICS offers the lowest priced course in TV Repair and Servicing on the market today—less than \$100. Yet you'll say that the texts on color repair alone are worth double the price.

No other training course available today can touch the new ICS TV Servicing/Repair Course for practicality and simplicity.

It solves your training problems. Saves valuable shop time... expands employee capacity and professionalism. Fact is, with the very first text, a complete novice can learn to repair 20 percent of all TV troubles. In just a few short months, he can be doing advanced bench test and repair work, on color sets as well as black-and-white. Practice work on trade-ins or sets you're repairing.

6 texts, 936 pages in all. 329 illustrations. Photos show how to recognize and diagnose the effect of various TV troubles on the screen. Concise, easy-to-follow texts tell how to remedy the trouble and why that remedy is best. Self-examinations along the way measure what is learned.

Fully approved by the National Electronic Associations for use in their apprenticeship program; the first course to receive this recognition. Completion of final exam an important step toward NEA certification.

Plus, at no extra charge—complete, easy-to-understand glossary of TV terms (schematics of top models of leading TV manufacturers also available—a bargain in itself). For full information, fill out coupon and mail today.

ICS

ICS, Dept. K8480C, Scranton, Penna. 18515


Yes, I'm interested in your new TV Servicing/Repair Course for training in my shop. Please send me complete information without obligation.

Name _____

Street _____

City _____

State _____ Zip _____

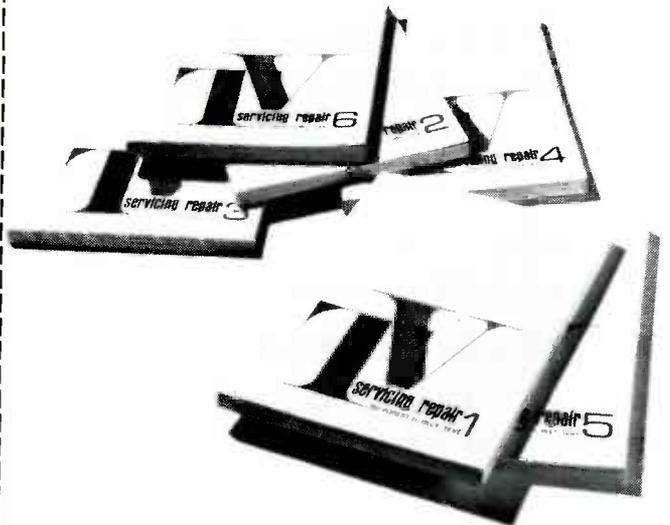

Circle 8 on literature card

making a business
out of service

Second in a series

TV servicing goes the franchise route

by J. W. Phipps and Wendall Burns

In the January issue we reported the operation of a large-scale independent electronic service shop. In this issue, we describe a chain or franchise operation. Coming up is a report rounding up what manufacturers are doing to expand their own service systems. These are all alternatives to the traditional self-employed, small-volume service shop.

■ A high-volume TV service system, duplicated and expanded into a chain of service centers, has been developed by a New Haven, Indiana technician and his associates. The franchise system was chosen by the founders of this firm, Tele-Quick, as the business method best suited to reach their objectives of establishing a number of these high-volume centers using a minimum number of technicians (in some cases only one) in each center.


The first Tele-Quick franchise center was inaugurated less than two years ago in New Haven. Since then, centers have also been established in five different market areas. Now, the company is projecting expansion throughout the continental U.S.



In developing the

1. *Determine the types of electronic service work that were franchise-able.*—A franchise service operation demands standard service of uniform quality, and methods to control the standards. But, not all electronic service can be easily standardized and controlled. One major segment, TV bench work, can be. Tele-Quick's founders decided to select primarily that segment of the market as their business.

According to Royce Evans, Tele-Quick president, it was initially decided to exclude the outside TV service business from the franchise package because "It takes a skilled man on a service call, and we would have to have four skilled men in most areas to handle the calls. In our system we utilize skill more effectively by employing one technician aided by a few semi-skilled assistants."

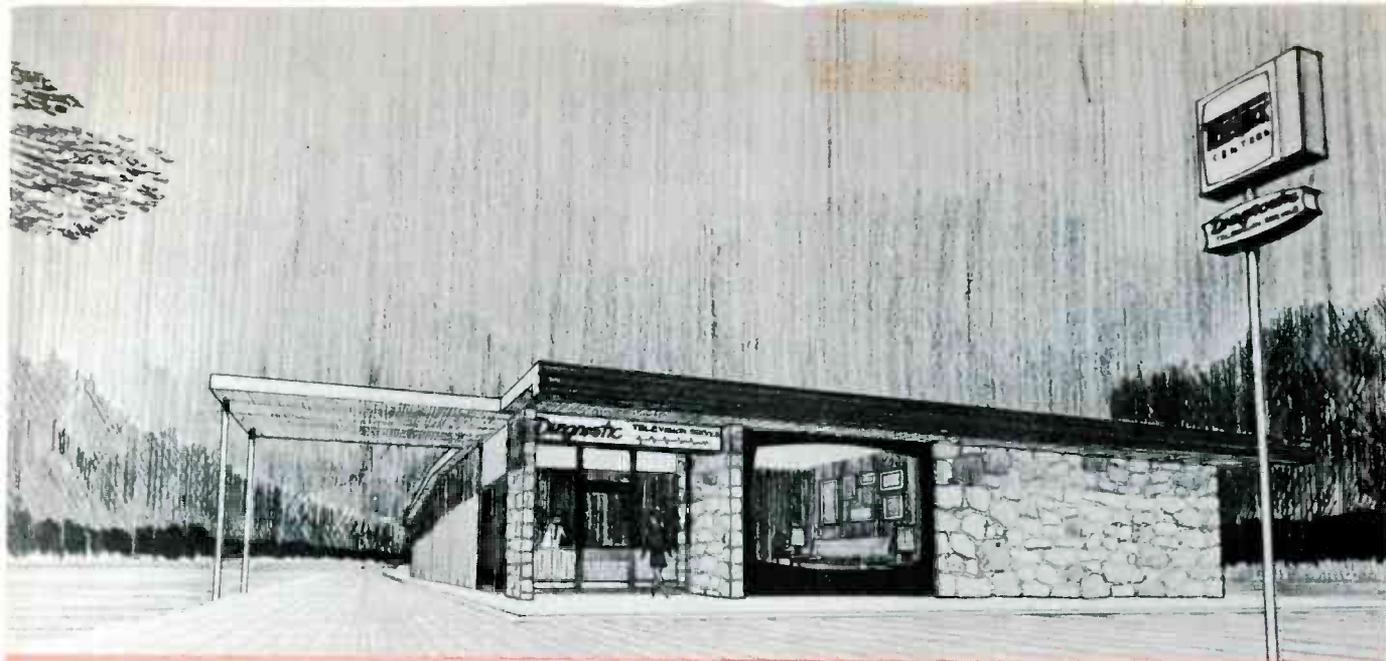

Singer Pat Boone lends his name, prestige and time to Tele-Quick. Here with Tele-Quick's president Royce Evans, right, and Sidney Patterson, another director of the firm, he participates in a ground-breaking for a new service center. The famous singer, a member of Tele-Quick's board of directors, is active in promotion activities.

A model building—although the above-pictured prototype of a building has been adopted as a model for newly constructed Tele-Quick centers, centers are also being established in existing structures. 'We would like to have low rent, and in some cases will go for existing buildings,' Evans said. He indicated furthermore that he does not believe it is necessary for the service shop to be in a high-rent, high-traffic area: 'People do not buy this service on impulse as they might buy a TV set—or as they buy a meal at a restaurant when they get hungry.' Although the appearance of the centers' structures may vary, all will display the distinctive logo shown here. Evans said, 'We will want uniform identity. At this time the franchisees lease their own sites.'

Tele-Quick chain, founders of the firm had to:

2. *Establish Confidence in a name*—Tele-Quick management wants this name to be synonymous with the concept "efficient service of uniform quality at a fair price." To create the image of *efficient service* the centers are laid out and operated in a manner to reflect an aura of efficiency, and the personnel, all in Tele-Quick uniforms, are trained to bolster this concept of efficiency. The idea of *uniform quality* is conveyed to the customer, among other ways, when he is told "the Diagnostic equipment indicated . . . such-and-such defect." This indicates uniformity with less chance of human error. To assure the customer that he is receiving service at a *fair price*, Tele-Quick management insists that the charge may not exceed the estimate, and has adopted the practice of advising the customer of the diagnosis and estimate before any work is begun.

3. *Adapt to this industry and the franchise system these other elements common to any commercial service operation:*

a. A precise, standardized cost accounting system—Each account is assigned a number on the standardized chart of accounts adopted for the Tele-Quick centers. Each franchisee is instructed in bookkeeping methods and in methods of reporting and control required by the "parent" organization. A complete data processing system presently is being developed.

b. Efficient use of manpower—This is based on a shop system using adequate diagnostic equipment, efficient shop layout, and a step-by-step approach to diagnosis and repair. Tele-Quick's President Evans said a center can function "without a problem" using only one technician, one apprentice technician and one or two semi-skilled persons completing 10-15 sets a day. (Layout and methods, page 13.)

(Continued on next page)

Tele-Quick method of servicing

■ Regardless of the trouble symptoms displayed, each set received for servicing at Tele-Quick undergoes a routine step-by-step servicing procedure designed to uncover all troubles. When the trouble diagnosis is completed, an estimate of the cost of repair is made, and the customer is notified of the diagnosis and the cost. No repair is made until authorization has been received from the owner of the set.

Each set is processed in the following sequence:

Step 1: Set is brought in by customer. The customer's name, address, phone number, etc., and the customer's description of the trouble symptom are recorded on a work order form called a Tele-Log. The Tele-Log is then placed inside a clear plastic bag called a Tele-Tote Bag, which is attached to the set.

Step 2: The set is placed on a roll-about cart and rolled to the first service station. If necessary, the chassis is removed from the cabinet. The chassis and picture tube are cleaned. All tubes are checked, with the exception of the high-voltage rectifier, horizontal output and damper tubes, which are checked in later tests. All defective tubes are listed on the Tele-Log.

Step 3. The chassis is rolled to a "Diagnostic island" which is equipped with all the test equipment required for a complete check of each receiver. A technician performs a complete Diagnostic procedure designed to uncover all troubles in the receiver. The results of the diagnosis are recorded on the Tele-Log, along with an estimate of the cost of repair.

Step 4: The customer is notified of the complete Diagnostic analysis and the cost of repair. If the customer cannot be reached at once, the set is put in a "hold" section until customer approval of the repair

and cost is received. No repair is accomplished until the customer authorizes it.

Step 5: Once authorization for repair is received, the set is repaired as soon as possible. Defective tubes and parts removed from the chassis are placed in the Tele-Tote Bag and given to the customer when the set is picked up.

Step 6: After repair is accomplished, the chassis is reinserted in the cabinet. The cabinet is cleaned and polished and the set is left to operate several hours before the customer calls for it.

Efficient use of available man power

Step 3 in the preceding sequence is the only servicing function requiring a skilled electronic technician. All other functions can be performed by semi-skilled personnel.

The fact that there are six distinct functions in the servicing sequence does not necessarily mean that six individuals are required. One individual can perform two or more of the functions, depending on the volume of business. For example, in a relatively low-volume operation one semi-skilled employee or trainee may perform steps 1, 2 and 4; one trainee may perform steps 5 and 6; and a skilled electronic technician performs step 3, the Diagnostic function. Thus, only three employees are required, of which only one is an experienced electronic technician.

Volume bench repair

According to Evans, the tube-check and Diagnostic functions are the primary factors limiting the volume of the operation. "However, a good, full-time, tube-check man can turn out 30 sets in an 8-hour day. Although we've never really determined exactly how many sets a given operation can average per day, we feel that 35 or 40 sets consistently every day would be a practical figure and would be a tremendously profitable operation." (continued)

Technician performing Diagnostic procedure at Diagnostic island. All personnel wear white smocks with Tele-Quick logo on the back.

Customer data and description of trouble symptoms are entered in Tele-Log at check-in counter. Customers' first impression of Tele-Quick operation is enhanced by well decorated, neat reception area and white - smocked personnel. Wide entrance behind check-in counter provides customer with impressive view of service area, including the "Diagnostic island."

Final check-out and reassembly of set. Note Tele-Log attached to picture screen of set and Tele-Tote Bag containing replaced parts on lower shelf of roll-about cart.


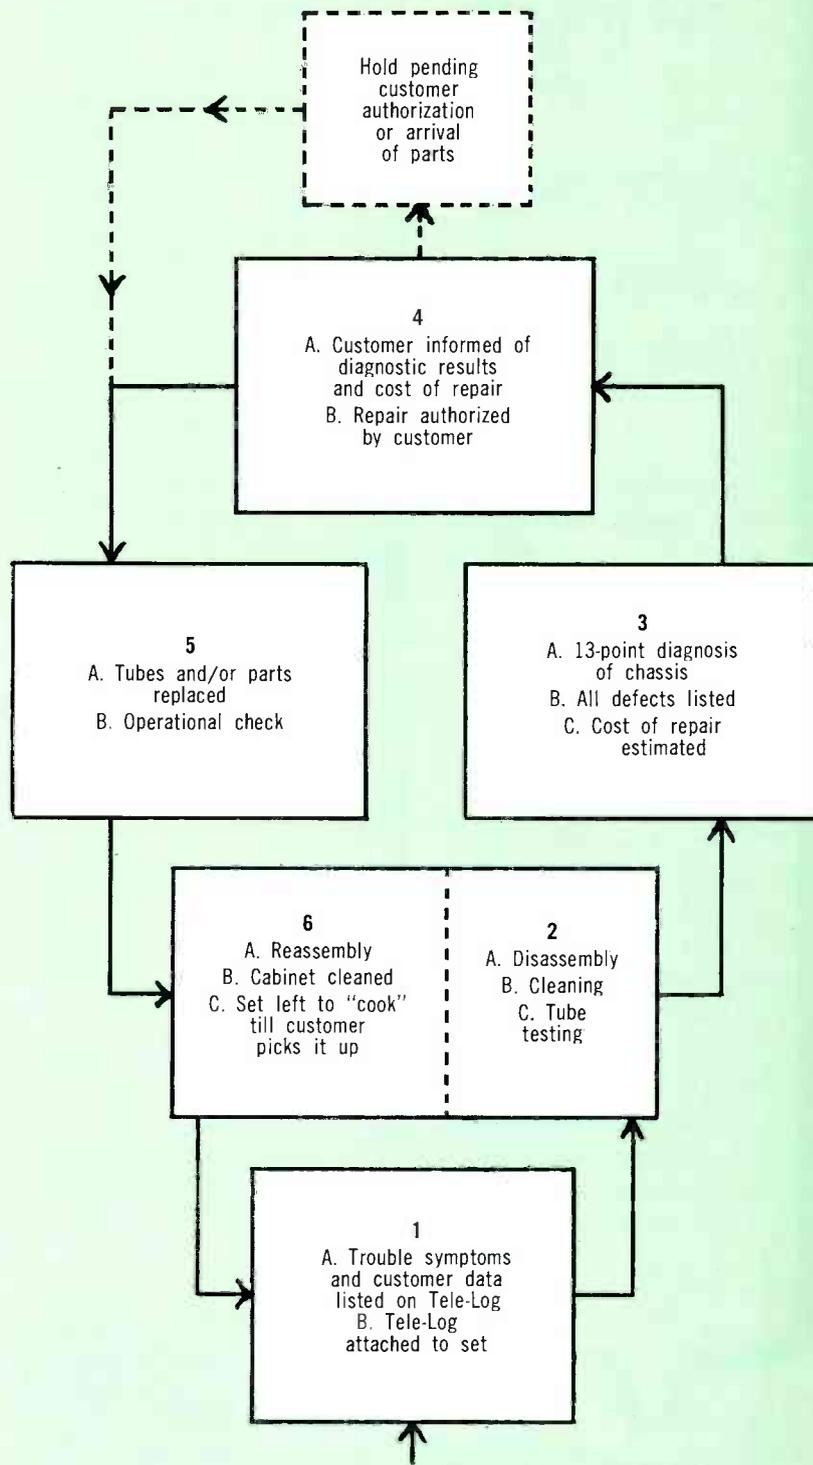


Diagram illustrating the Tele-Quick sequence of servicing.

Listen!

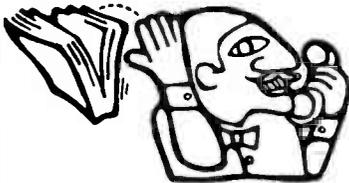

Service Dealers ...Eliminate the "Time Killer"!

It's not that we have anything against catalogs or those who must refer to them umpteen times a day. It's just that we're in complete sympathy with the time-conscious dealer who'd rather turn a profit than a page.

That's one reason why Jensen has *every* loud-speaker in the book . . . so *you* won't *need* a book. Simply tell your Jensen distributor the type speaker you need and he'll take it right off the shelf. Easy as that!

When you need a speaker—any speaker—call your local Jensen distributor.

. . . insist on Jensen.

Jensen

Jensen Manufacturing Division, The Muter Company
5655 West 73rd Street, Chicago, Illinois 60638

Be sure to ask
"What Else Needs Fixing?"

Circle 9 on literature card

TV servicing goes the franchise route

(continued)

Franchising not new—nor complicated

Although the concept of "franchising" has become popularly understood only in recent years, the method of doing business that this word describes is not new. It has long been in common use by the automotive and other well-established industries. Nor is the concept of franchising complicated. It merely describes a type of chain operation, with links of the chain being owned by operators of the various branches instead of all being owned by one central entity and operated by salaried managers.

Many believe that the franchise system can be the independent shopkeeper's road to affluence, or at least something akin to it. Business volume which many a businessman could not have built himself comes through identity with a nationally known product or service, and with less initial investment by himself.

The franchisee still has the freedom of being his own boss, with the added security of identification with an already established product. But, this means giving up some of the freedom he would have as an independent operator. He must conform to the discipline and restraints of the contract in areas of management such as record keeping, reporting, disclosure of financial position, merchandising, etc.

What is in Tele-Quick's franchise package?

The franchise package varies to meet the needs of each market area, and the price tag on the package varies accordingly. Basically, the package includes the Diagnostic service islands, Diagnostic equipment, initial parts inventory, training for the manager and other key personnel, and packaged advertising. The franchise package is presently being restructured to reflect the company's experience with those centers presently operating.

The price of the franchise package on a lease basis will be approximately \$19,000, Evans indicated.

"The goal is to put these in at the lowest dollar we can, so we can get centers opened and operating. In addition to the capital that he must put up for purchase of the franchise, the franchisee must have a "good cushion of operating capital—between \$5,000 and \$8,000", said Evans. □



Royce Evans, president of Tele-Quick: 'We have a couple years behind us now, and several locations, and a lot of statistics. We set up centers in 5 market areas across the country in a 1½-year period, and this is small potatoes compared to what we have to do. We are making an analysis to see what we can do to make the centers better, and where to locate. We assemble and produce the franchise package, and get it out. The better we are organized internally, the more centers we can set up.'

measure



NEW RCA WV-500B all solid state, battery operated VoltOhmyst eliminates warm-up time, zero shift that can occur in tube voltmeters. Completely portable. Only \$79.00.* Now has eight overlapping DC current ranges from $2\mu\text{A}$ to 1.5A.

The RCA WV-77E Volt-Ohmyst® can be used for countless measurements in all types of electronic circuits. Reliability for budget price. Only \$52.00.* Also available in an easy to assemble kit, WV-77E (K).

The RCA WG-412A R-C circuit box can help you speed the selection of standard values for resistors and capacitors, either separately or in series or parallel R C combinations. Only \$30.00.* It's easy to use, rugged, and compact.

The RCA WV-38A Volt-Ohm Milliammeter is a rugged, accurate, and extremely versatile instrument. We think it's your best buy. Only \$52.00.* Also available in easy to assemble kit, WV-38A (K).



The RCA WT-501A in-circuit out-of-circuit transistor tester is battery operated, completely portable. It tests both low and high power transistors, has NPN and PNP sockets for convenient transistor matching for complementary symmetry applications. Only \$66.75.*

The RCA WC-506A transistor-diode checker offers a fast, easy means of checking relative gain and leakage levels of out-of-circuit transistors. Compact and portable, it weighs 14 ounces, measures $3\frac{3}{4}$ by $6\frac{1}{4}$ by 2 inches. Only \$18.00.*

The RCA WV-98C Senior VoltOhmyst is the finest vacuum-tube voltmeter in the broad line of famous RCA VoltOhmysts. Accurate, dependable, extremely versatile, it is a deluxe precision instrument. Only \$88.50.* Also available in an easy to assemble kit, WV-98C (K).

For a complete catalog with descriptions and specifications for all RCA test instruments, write RCA Electronic Components, Commercial Engineering, Dept. C-33W, Harrison, N.J. 07029.

*Optional Distributor resale price. Prices may be slightly higher in Alaska, Hawaii, and the West.

LOOK TO RCA FOR INSTRUMENTS TO TEST/MEASURE/VIEW/MONITOR/GENERATE

Circle 10 on literature card

FAST

Complete Service On All Makes OF TV TUNERS

Maximum Time In Shop 24 Hrs.

(WE SHIP C.O.D.)

\$9.95

You Pay Shipping




Black &
White
or Color

VHF or
UHF

UV Combo's \$16.50

Price includes all labor and parts except Tubes, Diodes & Transistors. If combo tuner needs only one unit repaired, disassemble and ship only defective unit. Otherwise there will be a charge for a combo tuner. Ship tuners to us complete with Tubes, Tube Shields, Tuner Cover and all parts (including) any broken parts. State chassis, model number and complaint.

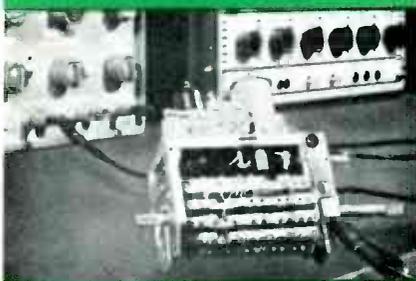

All tuners are serviced by **FACTORY TRAINED TECHNICIANS** with years of experience in this specialized field. All tuners are **ALIGNED TO MANUFACTURERS SPECIFICATION** on crystal controlled equipment and air checked on monitor before shipping to assure that tuner is operating properly.

GEM CITY TUNER REPAIR SERVICE

Box 6C Dabel Station
2631 Mardon Drive
Dayton, Ohio 45420

Circle 11 on literature card

letters to the editor

Where Has Paco Gone?

Could you tell me if the Paco Electronics Company is still in existence? I recently sent a letter to this company, but it was returned to me with the notation "moved, unable to forward." The address I used was: 70-31 84 St., Glenwood, Long Island, New York.
Vernon Dalen
Rt. 2, Box 239
Ridgefield, WA

The only address we have for Paco is the one you used. We have been unable to determine if they are out of business or have moved. Perhaps a reader will be able to enlighten all of us on this matter—Ed.

Old Tubes for Sale

I have all types of old radio tubes for sale at reasonable prices.

I have been a subscriber for several years and really enjoy the magazine.

D. C. Goodwin
Goodwin Radio Shop
Rankin, IL 60960

Information Needed

I am hoping that you can help me out. I am in need of a schematic and/or operating manual for a VTVM, Electronics Design Model 100.

Does anyone have one I can buy, beg or borrow? If one isn't available, does anyone know the address of the manufacturer?

Gerard L. LeBlanc
331 Glen Rd. No.
Rome, NY 13440

I require a 1619 tube for a Heath-kit power supply. I would appreciate any help in obtaining the name of a distributor for one or a substitute for one. If you can't, maybe one of your readers can.

Mark Abrams
3057 Cavendish Dr.
Los Angeles, CA 90064

Any assistance is welcome—Ed.

Atwater Kent Information

A request for a schematic or

wiring diagram for an Atwater Kent Model 60 appeared in the Letters to the Editor column in the January, 1969 issue. I have a book covering this model. I do not wish to send the book, but will send a copy of it if Mr. McCrea desires.

A. Pacanowski
90 Linwood St.
London, Ontario,
Canada

... and Linearity Pattern Generator

Mr. McCrea asks for a schematic or wiring diagram-battery hookup for a Model 60 Atwater Kent radio. In my *Rider's Manual*, Vol. I, the Model 60 is not a battery radio and the schematic does not show any cables. It does show a power transformer and cathode heater-type tubes, but does not give the tube numbers. They are referred to as 1st RF, 2nd RF, DET, 1st AUDIO and 2nd AUDIO (push-pull). The 2nd audio tubes are marked 2A and 2A2. The output tubes do not show a cathode. The RF tubes show a screen grid.

Recently, I bought a Model A470 Linearity Pattern Generator similar to that mentioned by Russell Scarpelli (Jan., 1969 Letters to the Editor). Unfortunately it had no instructions or schematics with it. I got it at an auction more as an antique rather than for any practical use. I could open it up and draw a diagram for Mr. Scarpelli if no other information is available.

Arthur Krasenics
95 Henderson St.
Bristol, CT 06010

Service Association News Wanted

Congratulations on the new *ELECTRONIC SERVICING* magazine. The article on the John Sperry service firm was very informative. It is great to know we have people like John who are willing to share their knowledge with the industry. He is going to be an instructor in the management institute we are having here in Texas,

sponsored by the Texas Electronics Association.

I was also impressed with the Reader Survey the magazine is taking. If possible, our association would like any advance information on this survey. It fits quite well in our future plans for the Texas Electronics Association.

I hope the new ELECTRONIC SERVICING magazine is association-minded and will print a few articles on the importance of it.

Gene Ware, President

Texas Electronics Association

Thank you, Mr. Ware, for your comments. The interest that you and the many other readers of ELECTRONIC SERVICING have shown in our new editorial direction is a real incentive to the entire staff. Of course, much of what we have done and will do in the future only can be accomplished with the help of such individuals as yourself and John Sperry and other technicians and shop owners who devote much of their time to improving the consumer electronic servicing industry.

The response to the reader survey, also published in the January issue, has been exceptional. By the time this issue goes to press, tabulation will have begun on the reader survey. We hope to have the results ready for the May issue.

Local, state and national electronic service association news and activities will continue to be reported in ELECTRONIC SERVICING. At this time we are preparing background articles on both the National Alliance of Television and Electronic Service Associations (NATESA) and the National Electronic Associations (NEA).

More Praise

Excellent! That's the one word that would best describe your "new" magazine, projected editorial emphasis as outlined in Editorial Profile (Jan., 1969 issue) and the first article in your new series of "Making a Business Out of Service." How badly this is needed.

For far too many years, electronic servicing has been referred to as the "business without businessmen" and all too unfortunately it was, and is, for the most part, a very accurate description.

Imagine
a doctor
without a
stethoscope



Imagine
an engineer
without a
slide rule



Imagine
a professional
service technician
without a Sencore
Mighty Mite V.



STANDARD OF A PROFESSION!

The Mighty Mite has become the standard of the industry with over 50,000 used daily by competent professional servicemen from coast to coast. The Mighty Mite checks them all; tubes large and small . . . and it checks them critically too. 100 megohm grid leakage sensitivity, individual tube element shorts test and cathode emission test at full rated current make the Mighty Mite really tough. It's tough on tube tests, tough in appearance with vinyl case and cover, and mighty tough on competition. But, it's not tough on your pocketbook at only

See your Sencore distributor today.

He has the TC142 Mighty Mite in stock.

\$84.50




SENCORE

NO. 1 MANUFACTURER OF ELECTRONIC MAINTENANCE EQUIPMENT

426 SOUTH WESTGATE DRIVE, ADDISON, ILLINOIS 60101

Circle 12 on literature card

WHAT DO YOU KNOW ABOUT HEART ATTACK?

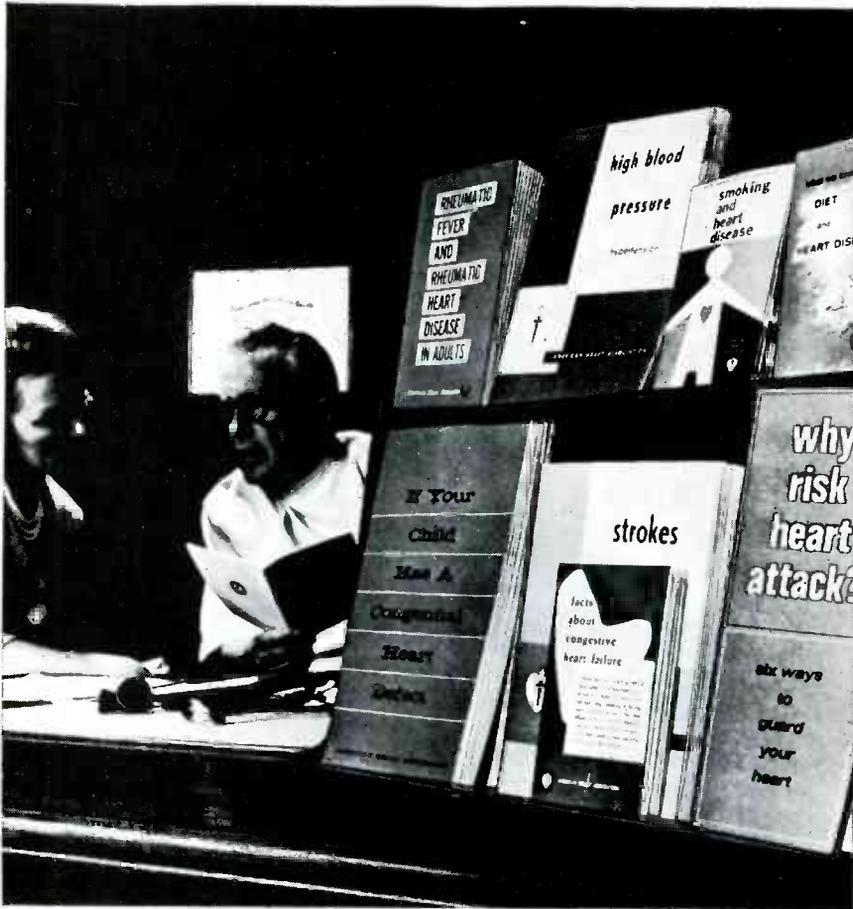

Do you know —

- that heart attack, the Nation's #1 health enemy, causes almost 600,000 deaths at all ages annually?
- that most patients who recover from heart attack return to their jobs?
- that you can reduce your risk of heart attack by controlling high blood pressure and by following a few simple rules in your eating and living habits?

You can learn more about heart attack and other heart and blood vessel diseases in interesting booklets prepared by medical experts. They are free, an educational service made possible by your Heart Fund. Simply visit, write or call your local Heart Association office.

GIVE...so more will live
HEART FUND 

Contributed by the Publisher

letters to the **editor**

(Continued)

Many fine periodicals have done an admirable job of providing valuable technical information to help the concerned technician keep abreast of newer developments, equipment and procedures. Occasionally, some of these same journals would present an article devoted to some phase of business management. These infrequent blessings were devoured by some perceptive individuals, deliberately ignored by many, and probably completely undetected during the normal thumbnail skimming by the majority of the intended . . .

At our latest state association convention in July, 1968, the program planners decided to substitute the normal array of technical topics with one of introduction to basic operation procedures. The enthusiastic reception indicates that this diet will be continued . . .

Its effectiveness should be enhanced by the fact that yours is to be a continuing program which can be anticipated with certainty rather than an occasional "one shot" episode and will be presented with some semblance of continuity.

I personally am looking forward to the presentation of every topic hinted at in your editorial profile and I think that association leaders will be urging their members to let their thoughts dwell a little longer than usual between the pages of your fine magazine . . .

W. S. Harrison, Director
 Virginia Electronics Association

May I congratulate you on your newly announced editorial policies as stated in the January issue. I have been looking forward to the time when a periodical such as yours would begin paying more than lip service to the electronic servicing industry.

In past years, there has been an almost complete vacuum in the reporting of industry news and the treatment of industry problems. Business type articles seemed to center around either diversification into some type of sales business or

into another branch of electronic maintenance other than consumer (entertainment) electronics. News seemed to predominately come from the manufacturing and distribution levels of electronics. I hope that your announced intentions and such things as your reader survey and the article on Sperry TV provide an accurate indicator of things to come.

Knowing Mr. Sperry and having visited his place of business more than once, I can say that you have done an admirable job of reporting on his operation. You could have easily filled the entire issue with a more detailed study. Although my own business is extremely small compared to Sperry's, we differ in our outlooks in minor degree . . .

Consumer electronic service is capable of standing on its own two feet, regardless of whether it is operated separately or in conjunction with sales. Proper bookkeeping and cost allocation in combined sales-service businesses would show that owners consider service operating at a loss. Conversations with some of these owners at recent service association meetings revealed they do not compensate their service departments for delivery and in-warranty service even though these items represent a major portion of the service department work load. Conclusion? We all need education!

Lewis M. Edwards, Jr. CET
Trenton, NJ 08609



Name and address?
I figured there would be a bunch of red tape.

More on Warranties

Just a line to endorse the letter by W. S. Harrison of the Virginia Electronics Association (Dec., 1968 Letters to the Editor).

The warranty situation is ridiculous. An independent serviceman cannot make a service call and replace warranty parts and then tag and make a trip to the distributor to get the parts replaced (if they have them), and do all this for a charge of \$5 to \$10 and long remain in business.

It also seems that the manufac-

turers that put out the shoddiest merchandise are the same ones that have the least supply of available parts.

It is difficult to get a customer to pay about \$30 to replace a flyback transformer in an \$80 TV, one and a half years old.

Please realize that there are still some quality manufacturers, but this trend to longer warranties and captive service serves no useful purpose to anyone.

Mel Bonenberger
Member TESA of Oklahoma

Is Johnson's new 23-channel Messenger 123 at \$169.95 . . . Legal?



You be the Judge.

Is it unfair competition for Johnson to produce a 23-channel solid state unit with the incomparable Johnson "talk-power" for less money than you had to pay yesterday for a 12-channel unit with crystals?

Is there a law against operating a rig whose specifications are close to theoretical perfection—such as 0.4 microvolt sensitivity . . . and sharply filtered 7 kHz selectivity?

Is it a crime to build in a special speech compression circuit for unsurpassed voice intelligence? Or the famous Johnson high-efficiency noise limiter that virtually wipes out ignition and other extraneous radiated interference?

We think you'll agree: For sheer value, Messenger 123 is the exception to the rule.


E. F. JOHNSON COMPANY
WASECA, MINNESOTA 56093



Circle 14 on literature card

Winegard introduces COLOR

...dramatically different in design, in performance and in construction!

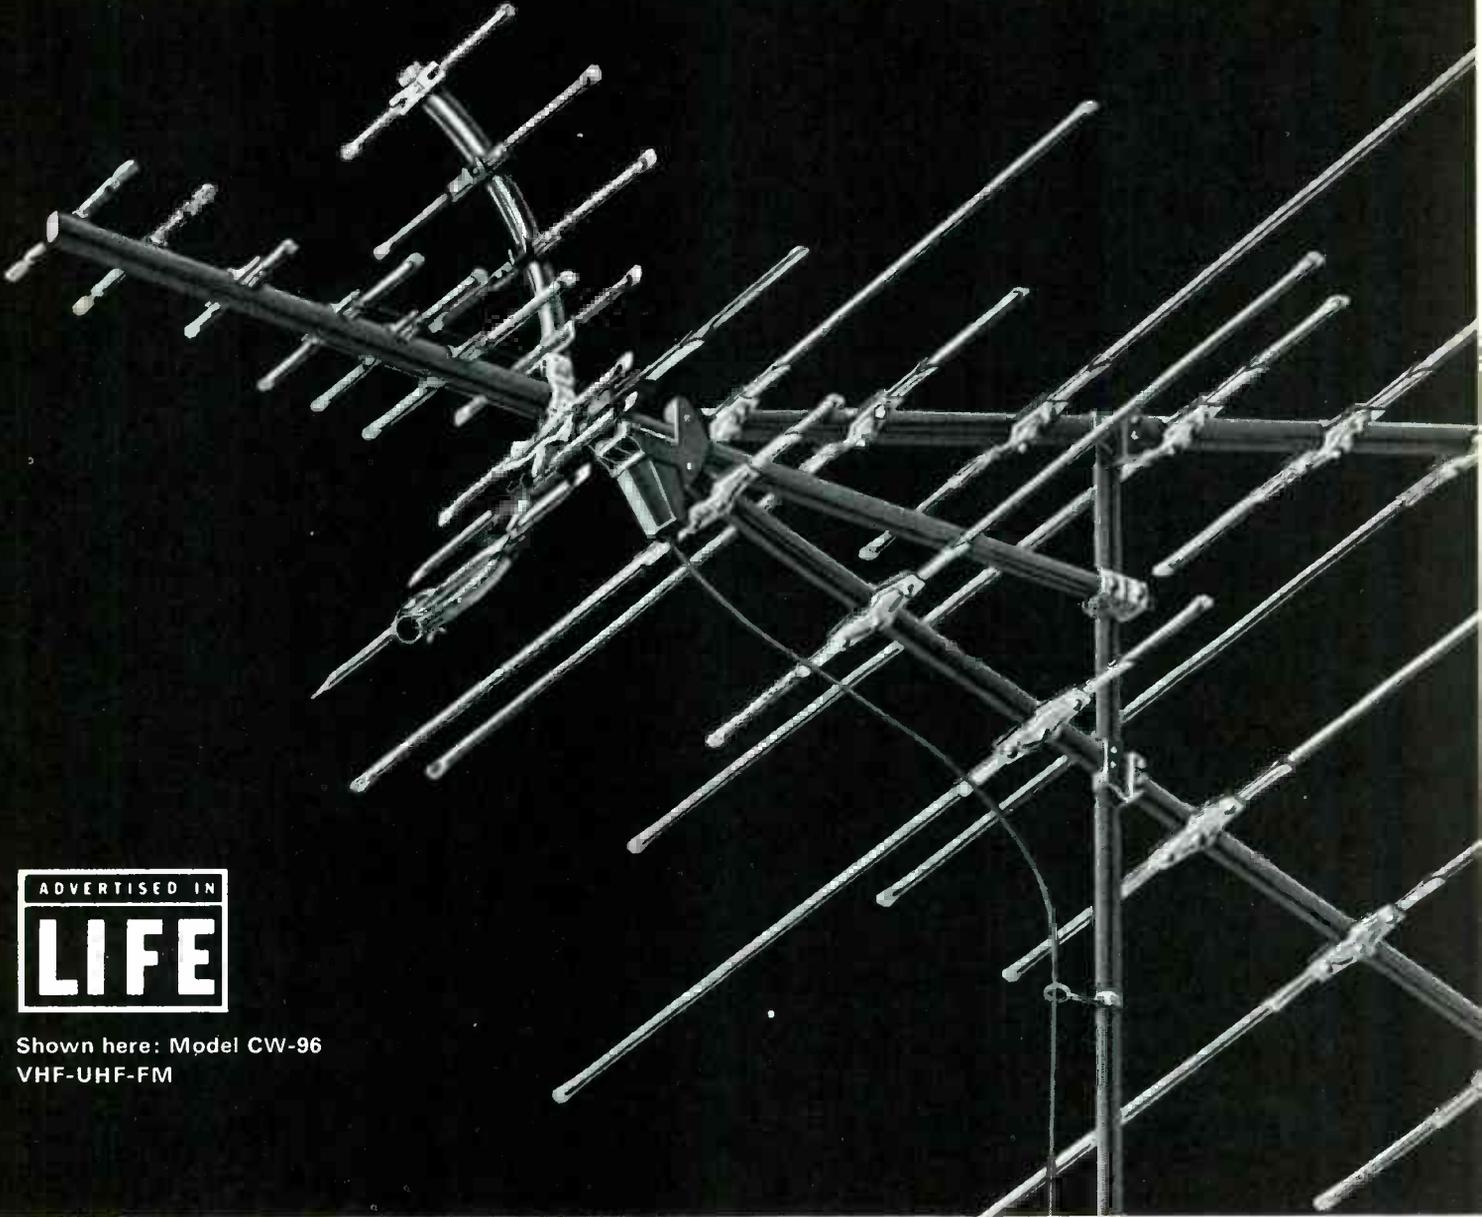

Shown here: Model CW-96
VHF-UHF-FM

When we introduced the *original* wedge design antenna (the SC-1000) in June of 1967, we told you there would be plenty more to come.

And now it's here. Now we've refined and expanded our original wedge into an entire line of *super high gain* antennas . . . the phenomenal Color Wedge series! Phenomenal because Color Wedge is much more than a new antenna or a new shape. It's a dramatically different antenna. Dramatically different in design! Dramatically different in performance! And dramatically different in construction.

Look for yourself! Both high and low band elements are connected directly to the booms—so that the booms are actually used as phasing lines. Element insulators and harmonic parasitics are completely eliminated, making the Color Wedge much more mechanically rugged. All elements operate at their fundamental mode, assuring complete freedom of minor lobes on all channels, so pick-up of unwanted, interfering signals is reduced almost to zero.



And, of vital importance, Color Wedge has a built-in ferrite impedance stabilizer that enables us to tune the antenna driven elements longer than is possible in other antenna designs, resulting in 10% more gain and an automatic match at 300 ohms. And, incidentally, all that and more is achieved in an antenna that is up to 50% shorter and more compact than other antennas would have to be.

Other unique Color Wedge features? We've listed most of them here. When you see them, you'll know why Color Wedge is truly the most dramatically different antenna ever designed.


SPECIAL COLOR WEDGE FEATURES

- Unique Wedge design provides greatly increased vertical capture area (36°) . . . prevents pick-up of interfering signals from above and below . . . and enables antenna to work at peak performance because booms act as phasing lines.
- Patented UHF driven element assembly on 82-channel models and patented parabolic reflector screen provide unprecedented gain in an all band antenna.
- Special lightning protection circuit prevents static electricity build-up and arching.
- Ferrite impedance stabilizer enables antenna elements to be slightly longer for greater capture area and an increase in gain of 10% . . . assures perfect impedance match to download.


WEDGE

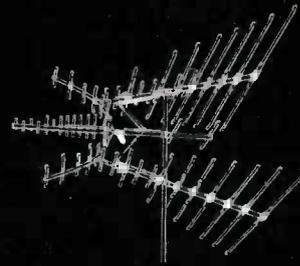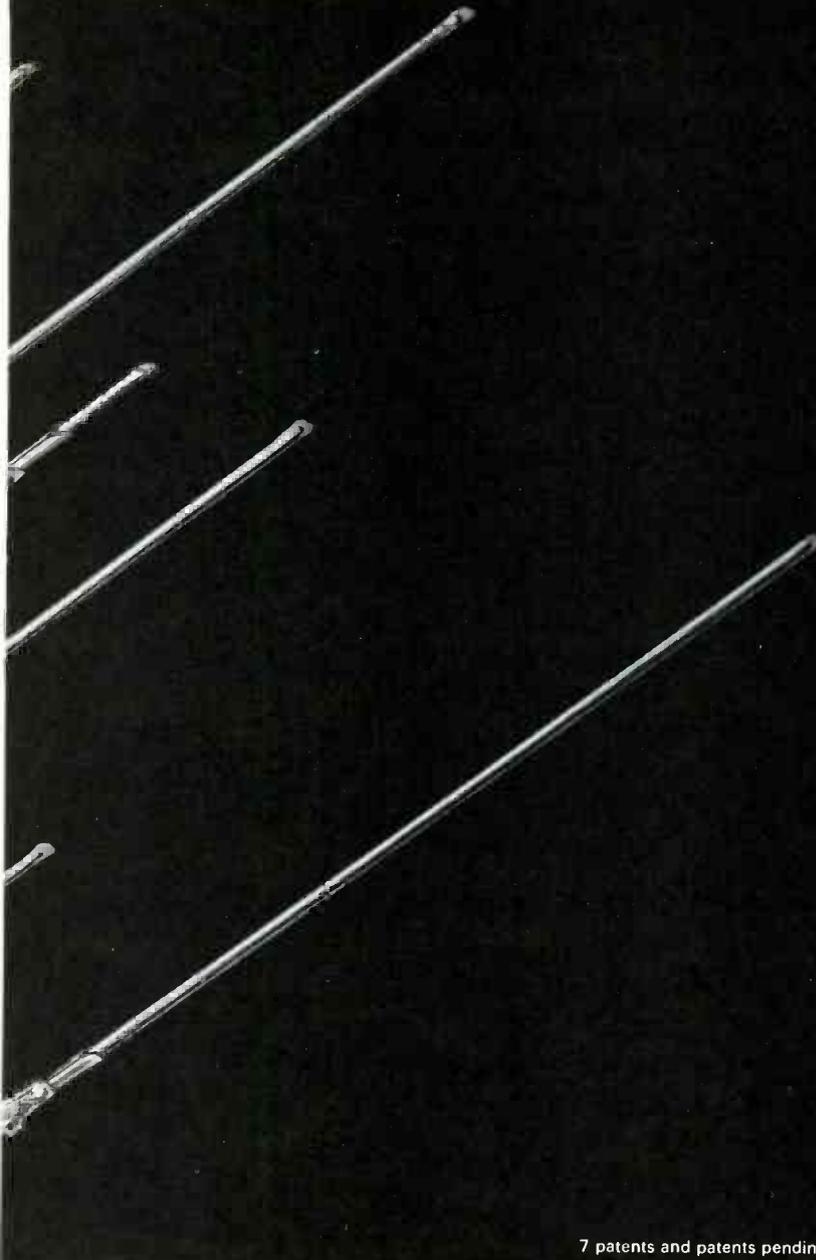

CW-1000 VHF-UHF-FM

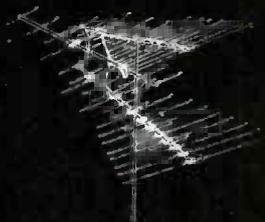


CW-2000 VHF-FM

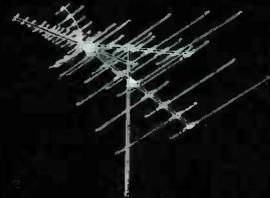

CW-98 VHF-UHF-FM




CW-48 VHF-FM



CW-96 VHF-UHF-FM



CW-46 VHF-FM



CW-94 VHF-UHF-FM



CW-44 VHF-FM

7 patents and patents pending

- Built-in transparent cartridge housing accepts solid state preamplifiers, and provides permanent weather protection for downlead terminals right at feed point of antenna, resulting in maximum signal transfer.
- FM control elements allow attenuation of strong FM signals where they interfere with TV reception.
- 82-channel models have special UHF control elements permitting antenna to be peaked for channels 70 to 83 in translator areas.
- New truss construction, with three mast clamps, makes this the most rugged, strongest antenna made. Two special Cylolac tuned mast clamps have built-in anti-resonant circuit to prevent signal leakage to antenna mast.
- Boom cone, made of unbreakable Cylolac, automatically positions upper and lower booms at 36° for maximum efficiency and rigidity.
- Super strong ellipsoidal booms and attached elements are of a special aluminum alloy for greater strength and resistance to bend and distortion.

- High tensile aluminum elements are made of alloy with PSI rating of 38,000 compared to 27,000 PSI for alloys used in other antennas. More than 49% stronger and 29% more resistant to bend and wind distortion.
- All aluminum parts are permanently weather and corrosion proofed with attractive, genuine gold and blue anodized finish.
- One-year factory guarantee of performance satisfaction and two-year unconditional replacement warranty.
- Beautiful new display-type shipping carton features wedge motif in color . . . attractive full-color wrap-around label on each antenna.
- Nationally advertised in Life, Sports Illustrated and Popular Mechanics.

Circle 15 on literature card

 **Winegard**
ANTENNA SYSTEMS

©Copyright 1969, Winegard Company

WINEGARD CO. • 3009-1 KIRKWOOD ST. • BURLINGTON, IOWA 52601

The in-circuit transistor tester— a time saver

by James Smith

The amount of solid-state units that have to be serviced is increasing, and, as a result, more and more service shops are turning to the in-circuit transistor tester to reduce the time required to service these units.

At present, there are more than 30,000 electronic service shops using the in-circuit AC beta transistor tester. Many more would use this time saver if they knew more about its operation and applications.

The following paragraphs explain how the in-circuit transistor tester operates and how it is applied to reduce servicing time.

Operation

With the tester connected to the transistor, the BETA CAL control is adjusted to the BETA CAL line on the meter. This sets the collector current to a normal level of about 2 milliamps, as shown in Fig. 1. When the TEST or GAIN button is depressed, the meter is transferred to the base circuit, as shown in Fig. 2, and the amount of base current it took to give the 2 milliamps of collector current is read on the meter.

Because beta is the ratio of input current to output current, the meter can be calibrated directly in beta. This is an extremely simple explanation, but the operation is just as simple and easy to perform.

Parameters

Beta is a very important parameter in a transistor because it indicates whether or not the transistor has enough gain (the ability to amplify a signal). As can be seen, the less base current it takes to produce the "set-up" collector current, the higher the beta or amplification of the transistor. This is the reason for the reverse-reading beta scale on these testers.

There is one more parameter that is just as important: leakage, or ICBO. Leakage is the reverse current that flows between the base and collector of a transistor, and is measured with the emitter lead open, as shown in Fig. 3.

Leakage in a transistor is important because it can affect the total operation of the circuit. Since the leakage current is in opposition to the normal current flow between the emitter and collector, it will lower the beta of the transistor. In many cases it may not lower the beta below the general beta spread of the transistor and, therefore, may not be

detected during the beta test. The leakage measurement must be made out of circuit because any resistors or coils in the circuit will provide a path for the DC current and produce a false reading.

To measure leakage, a voltage of the opposite polarity is applied between the base and collector leads, and the resultant base current is measured on the meter. Normal leakage of a germanium transistor will be about 2 to 10 microamps in low-power types and up to 3 milliamps in power-output types. The leakage in silicon transistors is much lower and, in many cases, may not even be indicated on the meter of the tester.

Connecting the Leads

The leads from the tester must be connected correctly to the transistor to be tested. With the transistor out of circuit, this is simple because the leads are easy to get to. The only difficulty that may be encountered is identification of the base, emitter and collector leads. Fig. 4 shows some of the more common base diagrams of transistors. When there is some doubt about lead identification, consult a transistor manual, such as Howard W. Sams Transistor Specification Manual, or Sencore's FET and Transistor Reference Book. Look up the transistor by number and refer to the base diagram indicated.


Testing transistors in-circuit may be a little difficult. In many cases, transistors are soldered to the circuit board, and the leads are either too short or non-existent so that the test leads cannot be attached to them. To overcome this, connect the tester leads to the leads of a component that is connected to the different elements of the transistor, as shown in Fig. 5. A small light under the board will help trace out the leads and printed circuit for making the right connections.

After the transistor tester has been connected properly to the transistor, either in or out of circuit, rotate the BETA CAL control on the tester until the meter pointer rests on the BETA CAL line on the



DEALER'S CHOICE

Yours When You Buy GE Tubes

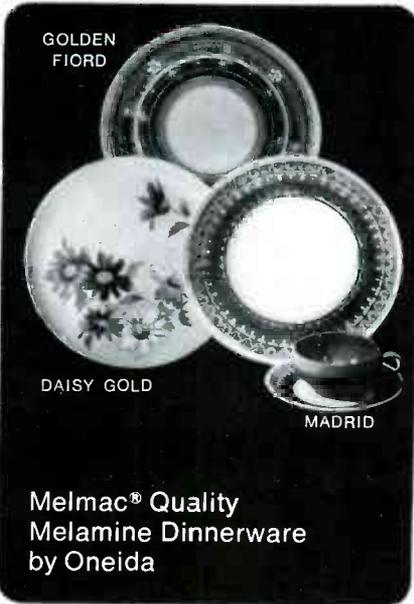

GOLDEN
FIORD

DAISY GOLD

MADRID


Melmac® Quality
Melamine Dinnerware
by Oneida



Wm. A. Rogers*
Silver Overlaid
by Oneida Ltd. Silversmiths



Deluxe Chest —
fruitwood finish,
cloth lined

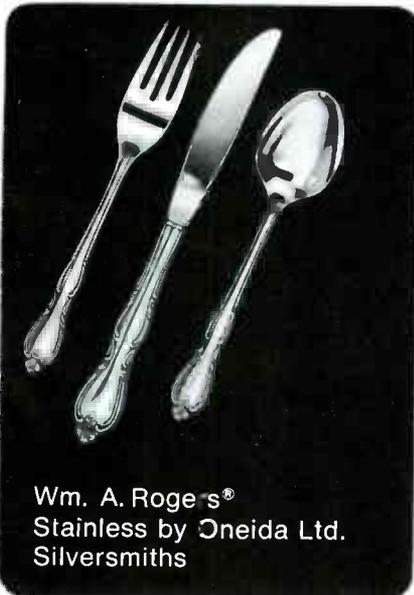

Wm. A. Rogers®
Stainless by Oneida Ltd.
Silversmiths



Beautiful tablecloths
by Bates

Help yourself to these valuable gifts from General Electric. Find out how easily you can earn the points needed for the gifts you want. See your participating GE tube distributor.

288-28

*trademark of Oneida Ltd.

GENERAL  ELECTRIC



Circle 16 on literature card

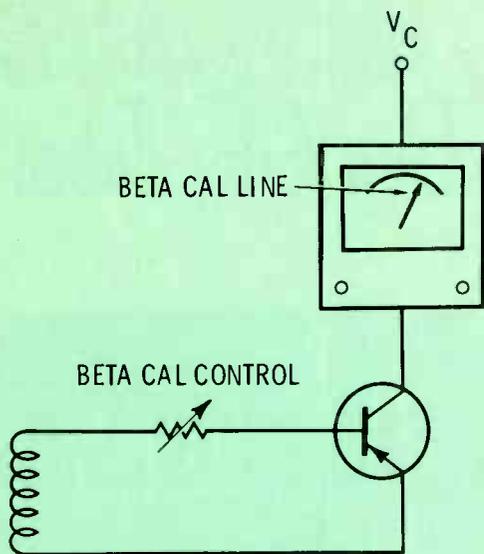


Fig. 1 BETA CAL control sets the collector current to a normal, or reference, level of about 2 ma.

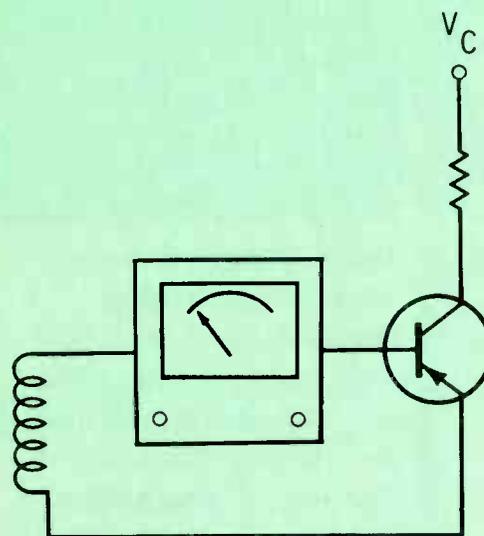


Fig. 2 Depressing TEST or GAIN button switches meter to base circuit. Meter indicates amount of base current it took to produce 2 ma of collector current, although meter scale is actually calibrated in terms of beta.

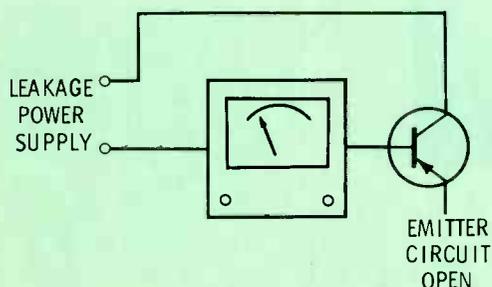


Fig. 3 Reverse current flowing between base and collector (ICBO) is measured with this basic test setup.

right hand side of the meter. As explained earlier, the collector current is now being set to a 2-milliamp reference level. With the meter calibrated, depress the BETA TEST or GAIN button, and read the beta direct from the meter scale. Most testers have two ranges of beta. In most cases, the high range will be used. The lower range will be used mostly for older transistors and many of the audio output transistors, since they have a lower beta figure than the low-power audio-driver transistor.

Checking for Defects

The chart on page 28 shows the meter indications for different transistor defects. For example, if one of the transistor elements is open, the tester will not calibrate out of circuit, but may appear to calibrate in-circuit due to current paths created by the circuit impedances. When the gain or test button is depressed, no beta reading will be obtained. For various other defects the tester will not calibrate or will not give a beta reading, indicating that the transistor or the circuit around it is defective. This will be the case in over 85 percent of the circuits that are tested. If the transistor tester can be calibrated and a gain reading in beta obtained on the meter, the transistor is not defective.

This simplicity and ease of testing is the one big reason why the in-circuit AC beta transistor tester has become so popular for solid-state servicing.

Leakage

In some cases, a beta reading will be indicated, but the transistor will still be defective. There are several ways to tell if the transistor is at fault.


First, if the meter needle vibrates rapidly during the beta reading, it indicates that the transistor could be leaky or have excessive ICBO. The vibrating needle indicates that a large amount of current is being drawn from the power supply of the tester. Any time this is indicated, recheck the transistor for leakage out of circuit. (In low-im-

NOW! An outdoor antenna you don't have to mount on the roof


All channel color TV WINDOW ANTENNA outperforms any indoor antenna!

Here's the ideal antenna for apartment buildings and homes . . . where rooftop mounting is impractical. Window mounting gives you an outdoor antenna for improved TV reception. Unique swivel design lets you aim for VHF and UHF stations independently.

- All aluminum construction with gold corodized corrosion-proof finish.
- Mounting bar fits horizontally or vertically in any type window up to 42" wide or high.
- Extension bars available for larger size windows.

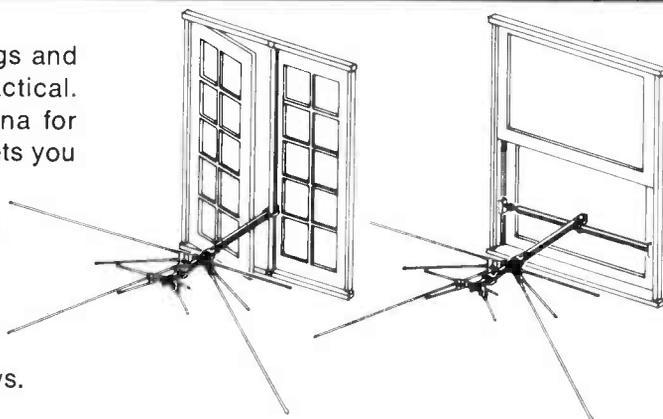


FINCO®

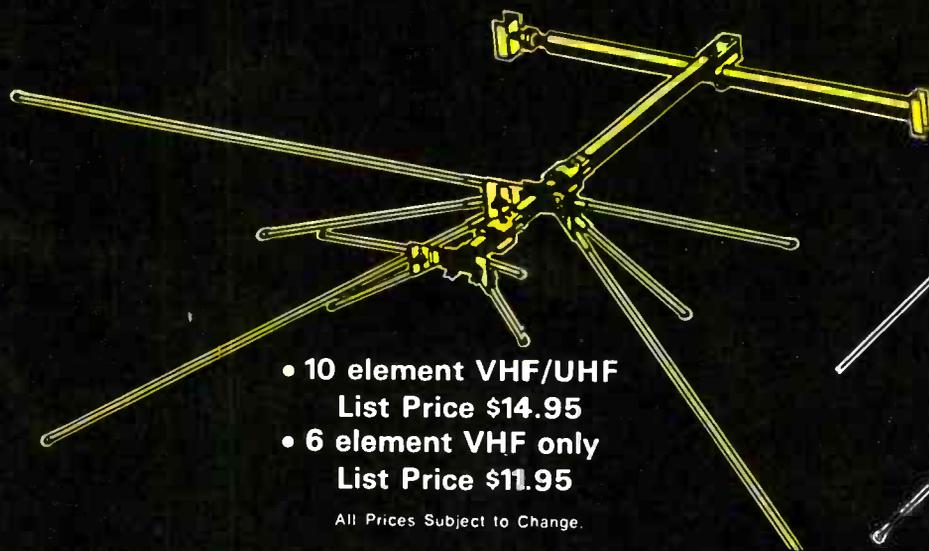

- 10 element VHF/UHF
List Price \$14.95
- 6 element VHF only
List Price \$11.95

All Prices Subject to Change.

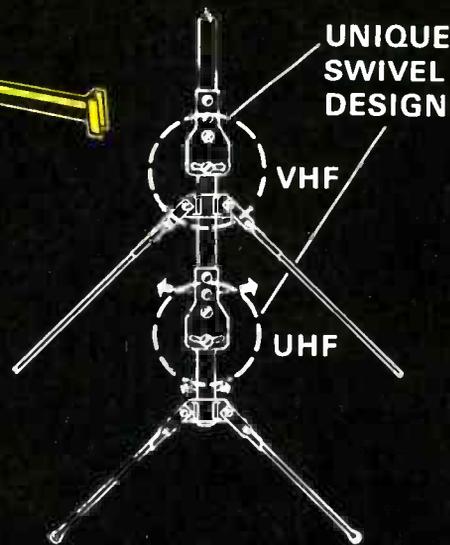

By the makers of the famous FINCO Color Spectrum Antennas "signal customized" for better color reception.
T.M.



THE FINNEY COMPANY

34 West Interstate Street, Dept. 310-3
Bedford, Ohio 44146

Mail coupon for free brochure.

Name _____

Address _____

City _____ State _____ Zip _____

Circle 17 on literature card

pedance circuits, the circuit itself, or a defective component in the circuit, could also cause this effect.) If the transistor is not found to be defective, check the circuit for the source of the problem. In either case, the defect has been isolated to a given stage or component.

If the beta reading of the transistor being checked is low, it is generally due to leakage of the transistor. It is a good idea to list on the schematic of the various sets that you service regularly, the beta readings taken in-circuit on a normally operating set. These readings can be used for comparison in the future. Also, consult a transistor manual for the values of beta that can be expected

from the various types of transistors.

Examples of Application

Using an in-circuit transistor tester and the preceding information, servicing time on solid-state devices can be reduced. Here are a few examples and points that can be used for servicing solid-state devices in the shop.

The customer complained of distorted audio after his radio operated for several minutes. The unit was opened and the audio output transistor was replaced. When the unit was connected to the bench power supply, it operated normally for over 30 minutes without distorting, so it was buttoned up and returned

to the customer. Two days later he returned the radio for servicing.

When asked how long it played before distorting, he said 30 minutes. Without opening the unit, it was allowed to play, and after 20 minutes, the sound became distorted. The output transistor was checked but it registered normal on both beta and leakage.

The audio stages were the most likely suspects, so beta readings of the transistors in the audio were taken and recorded while the unit was cold. The radio then was allowed to play until the distortion became very noticeable, and another beta reading was taken. The reading of the first audio amplifier was almost half the value of the reading taken earlier, and the leakage was high when checked out of circuit.

When the transistor was tapped, the leakage changed, indicating an intermittent problem. The first audio amplifier transistor was replaced, and the radio returned to the customer, who reported much later that the radio played better than ever. The moral: Don't jump to conclusions before having all the facts.

While servicing a small-screen, portable imported TV set, it was found that an exact replacement transistor is not always the answer. The original complaint had been no video. Another technician had discovered that the first video amplifier transistor was defective, and had put in the recommended replacement transistor from a replacement line. The result: a weak and washed-out picture. This prompted him to get an exact replacement transistor for the set, but it produced only slightly better results.

The in-circuit transistor test showed the driver and video output transistors to be high-gain types, while the exact replacement transistor was a low-beta type.

Another transistor in the set had the same markings as the replacement transistor so its beta was measured. It measured high.

The beta of various transistors in the general replacement transistor stock was checked. One transistor out of the group was high, but just under that of the driver and output stage. This was installed and the picture improved. The FET and transistor reference book was consulted, and it was discovered that the general replacement transistor

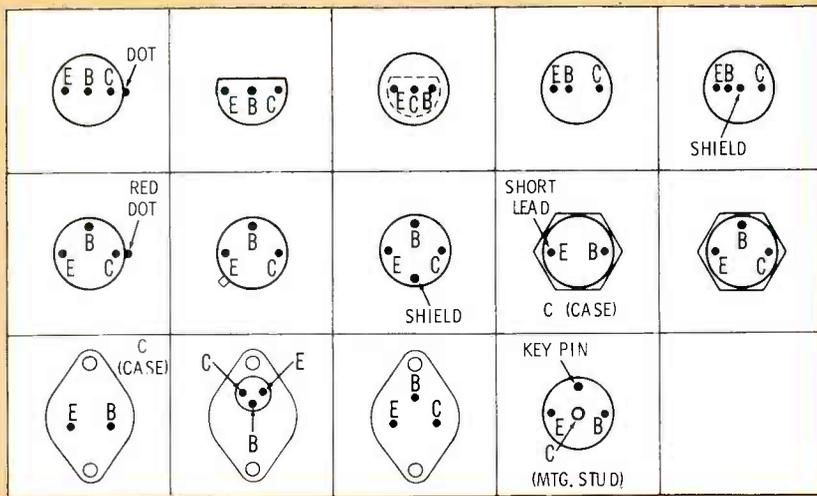


Fig. 4 Base diagrams of common transistor types currently in use.

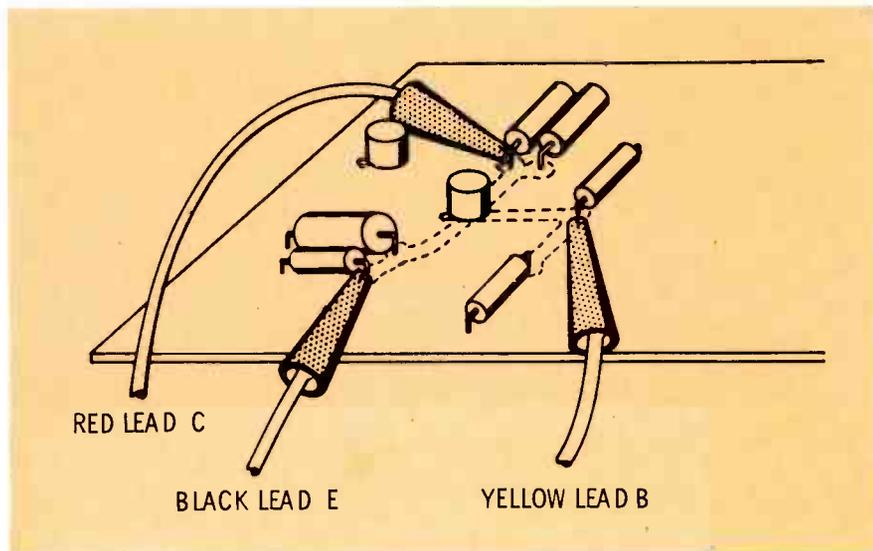


Fig. 5 Tester leads connected to components whose leads are electrically connected to leads of transistor under test.

Our tubes have finally met their match.

We've been making power output tubes for a long time.

Now, we're matching them.

You can get the most popular output tubes—6BQ5, 7591A, 7868, and 8417—in carefully matched pairs.

Matched pairs that lower harmonic distortion, reduce hum.

And give you more satisfied customers.

Sylvania is the only domestic brand that your distributor has in stock. Just ask for 6BQ5P, 7591P, 7868P, or 8417P. The suffix "P" assures you that you are getting a set of tubes factory-matched by Sylvania.

Sylvania Electronic Components, Electronic Tube Division, West Third St., Emporium, Pa. 15834.



SYLVANIA
A SUBSIDIARY OF
GENERAL TELEPHONE & ELECTRONICS

Circle 18 on literature card


March, 1969/ELECTRONIC SERVICING 27

ARROW AUTOMATIC STAPLE GUNS

CUT WIRE & CABLE INSTALLATION COSTS

... without cutting into insulation!


SAFE! Grooved Guide positions wire for proper staple placement! Grooved Driving Blade stops staple at right depth of penetration to prevent cutting into wire or cable insulation!

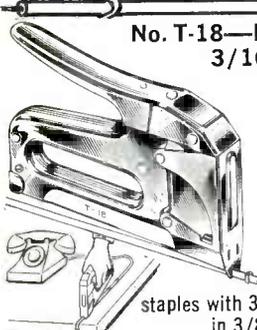

No. T-18—Fits wires up to 3/16" in diameter.

BELL, TELEPHONE, THERMOSTAT, INTERCOM, BURGLAR ALARM and other low voltage wiring.

Uses T-18 staples with 3/16" round crown in 3/8" leg length only.

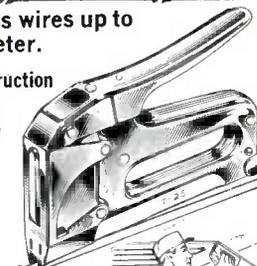


No. T-25—Fits wires up to 1/4" in diameter.

Same basic construction and fastens same wires as No. T-18.

Also used for RADIANT HEAT WIRE

Uses T-25 staples with 1/4" round crown in 9/32", 3/8", 7/16" and 9/16" leg lengths.

T-18 and T-25 staples also available in Monel and with beige, brown and ivory finish at extra cost.

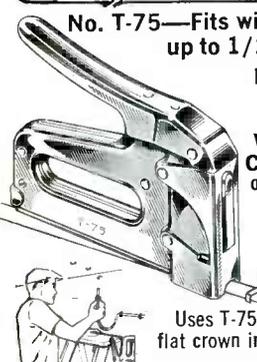

No. T-75—Fits wires and cables up to 1/2" in diameter.

RADIANT HEAT CABLE, UF CABLE, WIRE CONDUIT COPPER TUBING or any non-metallic sheathed cable.

Also used as DRIVE RINGS in stringing wires.

Uses T-75 staples with 1/2" flat crown in 9/16", 5/8" and 7/8" leg lengths.

Arrow Automatic Staple Guns save 70% in time and effort on every type of wire or cable fastening job. Arrow staples are specially designed with divergent-pointed legs for easier driving and rosin-coated for greater holding power! All-steel construction and high-carbon hardened steel working parts are your assurance of maximum long-life service and trouble-free performance.

Ask your Electrical Supply Dealer or write for further details.

ARROW FASTENER COMPANY INC.
Saddle Brook, New Jersey 07663
"Pioneers and Pacesetters
For Almost A Half Century"

Circle 19 on literature card

was usable since its beta reading of 75 fell within the indicated normal beta spread of 50 to 180. However, the transistor that finally solved the problem had a beta of 165. Apparently, the design of the video circuit left much to be desired and would work only with high-beta transistors in all three stages.

In most cases, the circuit will operate normally with a transistor whose beta falls within the given beta spread of the general replacement transistor, but don't overlook the fact that some circuit designs are more gain sensitive than others.

Other Tips About Transistors

There is such a thing as an intermittent transistor. The AC beta can be checked hot or cold. Using freeze spray can speed up servicing time.

Connect the in-circuit tester to the suspected transistor, and check the beta. While depressing the TEST or GAIN button, spray the transistor with the freeze spray. If the beta reading disappears, the transistor is defective. Beta gradually decreasing is normal for a transistor operating in cold ambient temperatures. Any sudden or drastic change

indicates a thermally intermittent transistor.

Another problem involves the transistor that is not listed in any specifications book. In this case, look for a transistor with markings similar to the defective transistor, and use its beta reading to select a replacement transistor. Usually a similar transistor can be found in the TV set, but if not, look for one with a similar function, such as an audio driver for a video, horizontal or vertical driver.

In the IF there are usually three transistors. Compare the two good ones and average the readings. IF and RF transistors generally have lower beta than audio transistors.

Conclusion

Servicing time can be reduced by using the in-circuit transistor tester. The amount of time saved is dependent on the technician's knowledge of the operation and application of the instrument and his ability to interpret the information it supplies. A thorough understanding of the parameters and peculiarities of solid-state devices is also essential to quicker solid-state servicing. ▲

Transistor Tester Meter Indications For Defective Transistors

TROUBLE	METER INDICATION
Open Base, Emitter or Collector	Cannot BETA CAL when transistor is tested out of circuit. In circuit tester may BETA CAL through circuit impedances but no beta reading can be obtained when GAIN button is depressed.
Base to Emitter short	Tester will BETA CAL, but TYPE switch must be in wrong position. Beta reading will be all the way to left or greater than infinity with meter pointer vibrating.
Base to Collector short	Tester will BETA CAL, but when GAIN button is depressed, meter indication will not change.
Emitter to Collector short	If there is a dead short, tester will not BETA CAL. If there is a low resistance short the tester may BETA CAL, but the meter needle will vibrate rapidly when checking beta.
Collector and Base leads interchanged	Tester will BETA CAL, but meter reads to right (a beta of less than one).
Emitter and Collector leads interchanged	Tester will BETA CAL, but meter may read to right (a beta of less than one). Indicates a very low beta figure. A few transistors may read the same because they are made to have the Emitter and Collector leads transposed.
Base and Emitter leads interchanged	Transistor will BETA CAL as opposite-polarity transistor, and no Beta reading is obtained when GAIN button is depressed.

You're making money in electronics now.

RCA offers 4 ways to make more.


Study at home... set your own pace.
RCA Institutes has an easy approach
to bring you bigger earnings.



COLOR TV During this course you'll perform over 50 experiments—and receive all parts and instructions to build your own color TV.

The cost of the Color TV Kit is included in the tuition—in both the beginner's program and the advanced course in color TV servicing.

Course is based on the latest receiver circuitry and equipment.

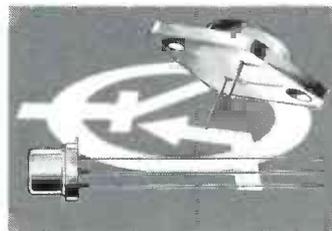

TRANSISTORS Transistor circuitry is what the TV repairman must cope with in most receivers today. This course gives you the necessary background.

You'll discover an easy way to an effective understanding of semiconductor technology, including characteristics of tunnel diodes, rectifiers and other solid state devices. Transistorized TV Receiver Kits also available.

FCC LICENSE TRAINING Get your license—or your money back! We're *that* sure you'll succeed with RCA Institutes Home Study Training. Course is all new—both in content and in the up-to-date method of study.

Choose the course for the FCC License you want: third, second or first phone. If you need basic training first, apply for the complete License Training Program.

CATV TRAINING Technicians are in short supply in CATV (Community Antenna Television Systems).

That's because CATV is expanding, as people seek better reception and more than local stations.

You'll receive two comprehensive lessons, covering the practical phases of CATV systems in either the Television Servicing or Communications courses.

WHEN YOU STUDY THROUGH RCA INSTITUTES HOME TRAINING, YOU CAN PAY FOR LESSONS AS YOU ORDER THEM, OR TAKE ADVANTAGE OF EASY MONTHLY PAYMENT PLAN. LICENSED BY NEW YORK STATE EDUCATION DEPARTMENT. APPROVED FOR VETERANS. ACCREDITED MEMBER NATIONAL HOME STUDY COUNCIL.

MAIL THE COUPON NOW FOR COMPLETE INFORMATION

RCA

RCA INSTITUTES, Inc., Dept. PF-39
320 West 31st Street, N.Y., N.Y. 10001

Please rush me FREE illustrated catalog. I understand that I am under no obligation, and that no salesman will call.

Name _____ Age _____
(please print)

Address _____

City _____

State _____ ZIP _____

Circle 20 on literature card

Cartridge and turntable

by Robert G. Middleton

Cartridge and turntable measurement tests are required to obtain and verify performance within accepted high-fidelity limits. These tests are listed below.

Cartridge Tests

1. Measurement of needle pressure
2. Checking of cartridge output voltage
3. Hum Tests
4. Test of frequency response
5. Measurement of tracking distortion
6. Verification of stylus angle
7. Observation of stylus tip
8. Verification of tracking angle

Turntable Tests

1. Measurement of turntable speed
2. Check for wow
3. Check for flutter
4. Level test
5. Tests for wobble and/or eccentricity
6. Approximate measurement of rumble.

Measurement of Needle Pressure

Fig. 1 shows a typical needle-pressure gauge. Other types may be used, but all indicate the pressure in grams.

Normal needle pressures are different for various types of recordings. A typical hi-fi, super lightweight, pickup employs 1, 2.5 or 3 mil radius sapphire tips. (One mil equals 0.001 inch.) A 25-ohm pickup of this type uses a nominal needle pressure of 9 grams, ± 1 gram. On the other hand, a 400-ohm pickup operates with a nominal needle pressure of 5 grams, ± 1 gram. For precise evaluations, stylus pressure must be checked

within specified tolerance limits against tracking distortion. This measurement is discussed later in this article.

The needle-pressure gauge should be placed so that the indication is obtained at the normal playing level of the pickup. This level varies in most changers; therefore, measurement is made at the average playing level. Although the pressure usually varies as the pickup is raised, and decreases as the pickup is lowered, this variation should not exceed 25%. If a greater variation is measured, look for a defect in the arm assembly. Obscure defects must be corrected by replacement of the arm assembly.

Checking of Cartridge Output Voltage

Cartridge output voltage is checked with an AC VTVM or with a calibrated oscilloscope. The advantage of a scope is that hum voltage can be distinguished from the normal cartridge output. Only the VTVM method will be discussed in this section.

The test setup for checking cartridge output voltage is shown in Fig. 2. It is desirable to employ a test record that provides a constant level at a standard test frequency, such as 1 KHz or 400 Hz.

A typical hi-fi super lightweight pickup that works into a 25-ohm load (R in Fig. 2) normally provides about 10 mv rms. If the output is weak, it is advisable to check the stylus tip, as explained later. If the tip is in good condition, but output is weak, the cartridge should be replaced.

The 25-ohm pickup described previously is often used with a 1-to-5 ratio transformer. Normal loading of the transformer results in a secondary output voltage of approximately 300 mv rms. On the other hand, a 400-ohm pickup normally

is used with a 1-to-6 ratio transformer. In this case, about 40 mv rms output will be measured across the secondary. Note that the secondary must be connected to the correct value of load impedance to obtain a meaningful voltage measurement.

With reference to Fig. 3, N_p denotes the number of primary turns, and N_s denotes the number of secondary turns. The winding ratio is equal to N_p/N_s .

The voltage ratio of the transformer is the same as the turns ratio (except for losses due to leakage flux under normal load). The current ratio of the transformer is the inverse of the turns ratio (except for losses). The impedance ratio is equal to the square of the turns ratio. This means that if the cartridge has an impedance of 400 ohms, and the transformer winding ratio is 1-to-6, the impedance ratio is 1-to-36, and the secondary impedance is 14,400 ohms. Thus, the nominal secondary load resistor has a value of 14,400 ohms. Note, however, that a somewhat different value of secondary load impedance might be chosen to compensate for incidental transformer characteristics such as distributed capacitance. This topic is explained in greater detail in this article under "Test of Frequency Response."

The normal output voltages of common types of cartridges may be summarized as follows: A variable-reluctance cartridge will provide from 10 to 30 mv rms; a ceramic cartridge, 500 to 1200 mv rms; and crystal cartridges, 0.5 to 5 volts rms. These values assume that the cartridge works into its specified load.

The load is an impedance which consists of both the load resistance, cable capacitance, and any leakage reactance of the transformer primary. The variable-reluctance pickup works into a load impedance of

measurement tests

5,000 to 50,000 ohms, with a stylus pressure of 16 grams or slightly more. The ceramic pickup works into a load impedance of approximately 1 megohm, with a stylus force of about 22 grams. The crystal pickup works into a load impedance as high as 5 megohms, with a stylus force of less than 70 grams.

Hum Tests

Pickups that employ iron and coil construction are more likely to be affected by stray hum fields than crystal pickups. Of course, a poorly shielded lead from a high-impedance pickup is susceptible to stray electrostatic hum fields. Pickups with iron and coil construction are generally used with solid-steel turntables, because magnetic shielding is thereby provided against stray hum fields from the motor and power supply.

To check for hum, use the test setup shown in Fig. 2, with the pickup held slightly above the record surface. Any reading on the meter is probably the product of hum pickup.

A better test for hum is made by using a scope in place of the VTVM in Fig. 2. Hum voltage is then seen as a 60-Hz (or 120-Hz) waveform, and can be definitely identified. Note that 120-Hz hum is most likely to stem from stray fields of a filter inductor. When playing a test record that has a 1-KHz tone, hum shows up with the tone signal superimposed on the low-frequency waveform, as shown in Fig. 4. The hum level can be minimized in any case by correction of shielding defects to prevent stray fields from gaining access to the pickup.

Test of Frequency Response

Frequency response is checked with a test record and an audio VTVM, using the setup shown in Fig. 2. Various types of test records

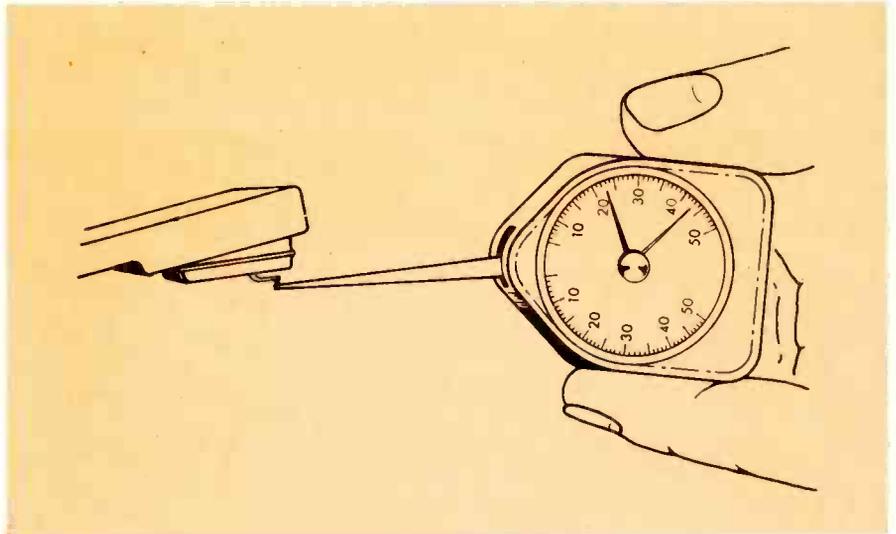


Fig. 1 A typical needle-pressure gauge used for measuring the pressure exerted at the tip of the needle.


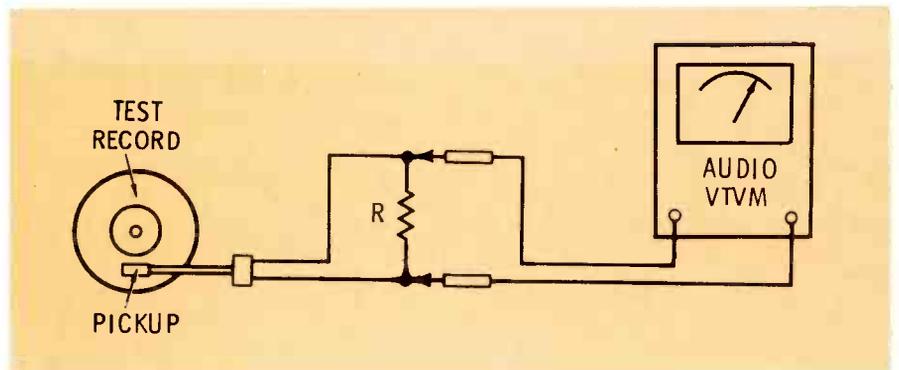


Fig. 2 Test setup for checking cartridge output voltage.

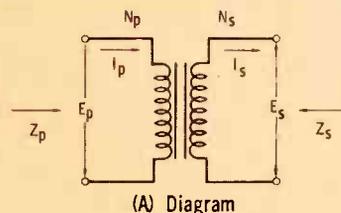

$$\text{(VOLTAGE)} \quad \frac{E_p}{E_s} = \frac{N_p}{N_s}$$

$$\text{(CURRENT)} \quad \frac{I_s}{I_p} = \frac{N_p}{N_s}$$

Fig. 3 Diagram and equations showing basic transformer relationship between number of turns, voltage, current and impedance.

$$\text{(IMPEDANCE)} \quad \frac{E_p I_s}{E_s I_p} = \frac{N_p^2}{N_s^2} = \frac{Z_p}{Z_s}$$

(B) Equations

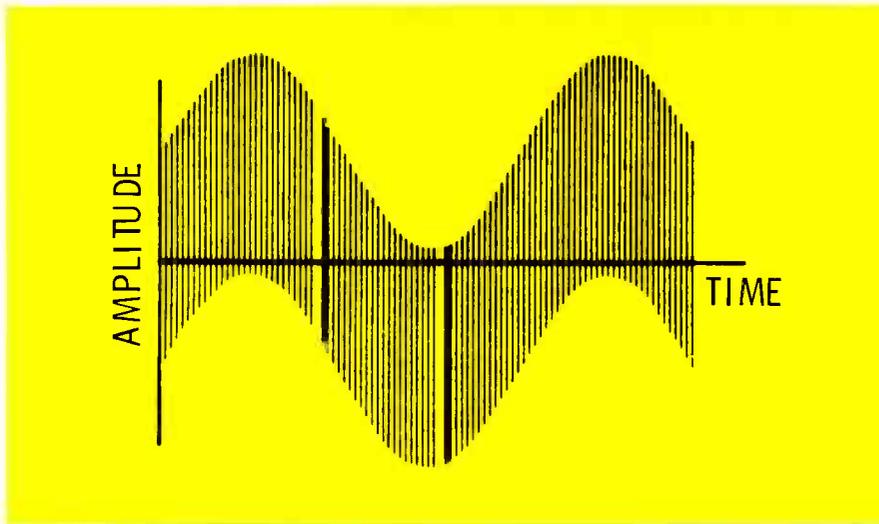


Fig. 4 Hum voltage superimposed on low-frequency waveform.

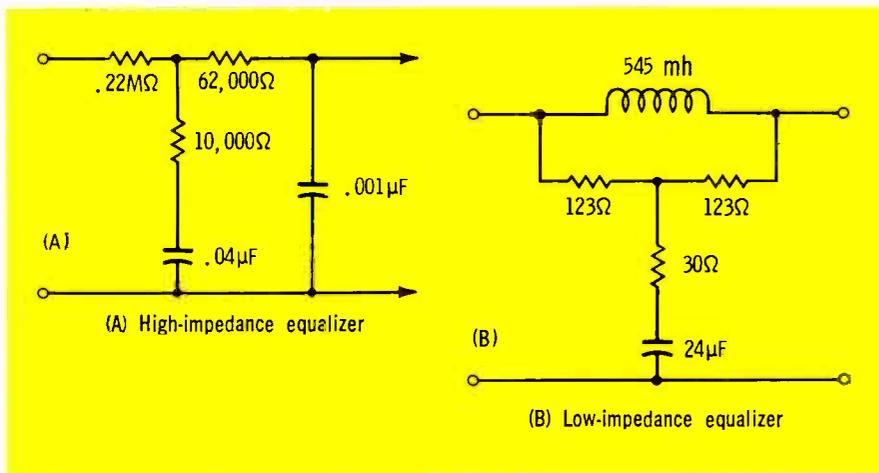


Fig. 5 Equalizer circuits can be used to improve frequency response.

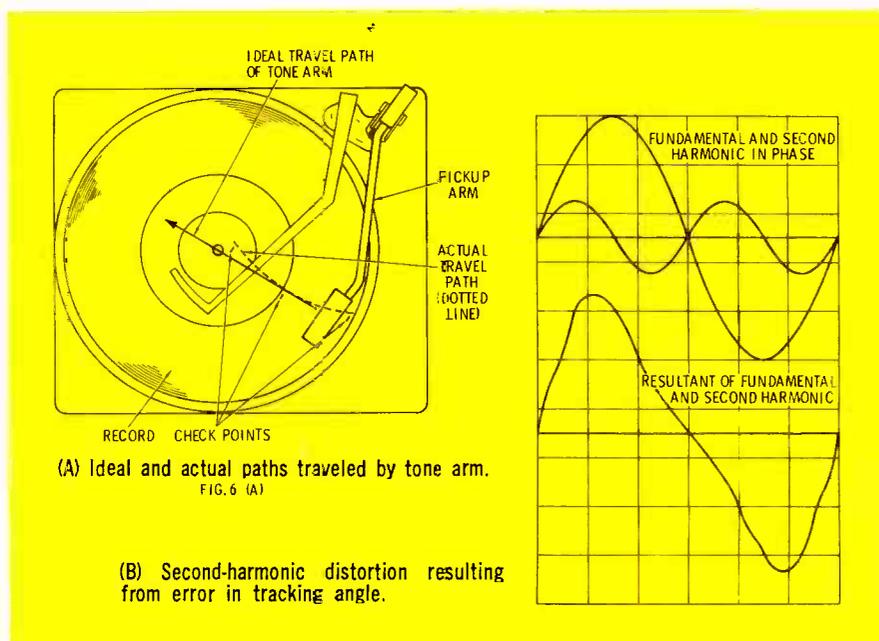


Fig 6 Illustrations showing tracking characteristics and harmonic distortion resulting from improper tracking.

are available. A **gliding-tone** test record can be compared to an audio sweep generator. One standard test record starts at 14 KHz and ends at 10 Hz. Another starts at 10 KHz and ends at 50 Hz. A **banded-tone** test record provides only a 1-KHz tone in steps with increasing output levels. This type of record is suitable for harmonic-distortion tests, but not for frequency-response checks. Some test records provide both banded-tone and gliding-tone outputs. For example, a banded-tone sequence may be followed by alternate gliding and constant audio frequencies from 3 KHz to 30 Hz. **Two-tone** test records are used only for IM distortion measurements.

The frequency response of a good ceramic or crystal cartridge should be reasonably uniform from 50 Hz to approximately 15 KHz. Variable-reluctance cartridges should have reasonably flat frequency response to approximately 20 KHz. Some types of high-output cartridges have an upper frequency limit of 8 KHz. Although one or more peaks in frequency response will often be found, the peak amplitude(s) should be less than 2 dB. An audio VTVM with a dB scale is particularly useful for these tests.

Load-impedance values can have considerable effect on the frequency response of a ceramic or crystal cartridge. Poor frequency response can sometimes be improved by a change in load resistance and/or capacitance. Equalizer circuits for standard recordings are shown in Fig. 5. If the high-frequency response of a pickup drops off gradually, this characteristic will often be acceptable, inasmuch as the pre-emphasis employed in most recordings must be equalized in the hi-fi system.

Measurement of Tracking Distortion

An ideal tone arm and pickup would track a record (see Fig. 6A) so that the stylus would always move perpendicularly to the tangent at the record groove. In practice, this can occur only at one groove in the record because the pickup moves on a curve from the outer to the inner grooves, as shown in Fig. 6A. A reasonably good test of the tracking angle is to place the stylus at the outer grooves, then at an intermediate groove, and finally at an

inner groove, and to observe whether the edge of the cartridge is **reasonably** tangent to the grooves.

A tracking error of 3° or 4° is normally expected at the outer and inner grooves. Large tracking errors are plainly visible, but small errors must be detected by careful measurement. Excessive errors in the tracking angle produce second-harmonic distortion, as shown in Fig. 6B. Harmonic distortion is measured with the test setup shown in Fig. 7. In such tests, it is assumed the preamplifier has been checked previously for distortion, using a quality audio oscillator.

Note that the percentage of harmonic distortion measured in Fig. 6B is not entirely accounted for by tracking error and possible preamplifier distortion. That is, the pickup might have inherent harmonic distortion. At this point in the procedure, we are concerned with minimizing the harmonic distortion due to tracking error. Since this is a function of stylus pressure, it is advisable to try the effect of increasing the stylus pressure within reasonable limits. Some pickups are rated for minimum stylus force to provide optimum tracking. If a recording or turntable is warped, or slightly eccentric, a 50% increase in stylus force may be required to obtain good tracking.

After checking for harmonic distortion, it is good practice to make an intermodulation distortion test, as depicted in Fig. 8. The two-tone test record must provide suitable frequencies. Assuming that the preamplifier has been checked previously and found to have acceptably low IM distortion, an objectionably high meter reading is due to non-linearity in the pickup. A banded-tone 1-KHz test record with progressive output levels may show that IM distortion is negligible except at high output level. In any case, a defective pickup must be replaced.

Verification of Stylus Angle

Even if the needle pressure is optimum, distortion will occur if the stylus angle is incorrect. Therefore, it is good practice to check the stylus angle against the manufacturer's specifications, if available. Angles can be conveniently measured with a protractor, such as depicted in Fig. 9. If the stylus angle is out of tolerance because of me-

15 CRYSTAL MARKERS 3 SWEEP RANGES ONLY \$135




New Heathkit IG-57 Solid-State Color TV Marker/Sweep Generator

The IG-57 combines the features of both a post marker and a sweep generator for less than you'd expect to pay for just one of these functions.

- Three linear sweep ranges for TV tuned circuits in sound IF, color bandpass, video IF circuits and proper overall RF/IF response • External attenuator provides 1, 3, 6, 10 and 20 dB steps up to 70 dB maximum • Can also be used with external sweep or marker • 15 crystal-controlled markers provided for color bandpass alignment; picture and sound carrier frequencies for channels 4 and 10; FM tuner, FM IF and discriminator alignment; TV sound IF adjustments
- All crystals included • Completely isolated 1-15 VDC variable voltage supply for positive or negative bias • Built-in 400 Hz modulation for trap adjustment and checking and adjusting FM tuners • Phase Control and Trace Reverse Switch so markers will appear from left to right as in set manufacturer's instructions, regardless of 'scope used • Blanking Switch eliminates return sweep and provides base line • Circuit Board Construction — three circuit boards, 27 transistors, 3 silicon diodes, 2 crystal diodes and 2 Zener diodes combine to make assembly faster with less chance of error • Bias and Scope Horiz. leads, Attenuator, Demod In, Scope Vert., RF and Demodulator cables included in kit.

Kit IG-57, 14 lbs., \$135.00; Assembled IGW-57..... \$199.00

IG-57 SPECIFICATIONS — Marker frequencies: 100 kHz; 3.08, 3.58, 40.8, 4.50 MHz, ±.01%; 10.7, 39.75, 41.25, 42.17, 42.50, 42.75, 45.00, 67.25, 193.25 MHz ±.005%. Modulation frequency: 400 Hz. Input impedances: External Marker, External Sweep, & Attenuator — 75 ohm. Demod In — 220 k ohm. Output impedances: Marker Out, Sweep Output & Attenuator — 75 ohm. Scope Vert — 22 k ohm. Bias voltage: Positive or negative 15 volts DC at 10 milliamperes. Type of marker: Birdie. Controls: Bias control with pull-on/push-off switch; Marker/Trace — dual concentric; Sweep Width/Sweep Center — dual concentric; Marker Out — concentric with Sweep Range switch; Phase. Switches: Rocker type — separate switch for each of the above listed frequencies; Blanking, On/Off; Trace Reverse; Modulation On/Off. Transistor — Diode Complement: (19)-2N3692 transistor. (7)-2N3393 transistors. (1)-2N3416 transistor. (3)-silicon diode rectifiers. (2)-crystal diodes. (1)-13.6 volt zener diode. (1)-20 volt zener diode. Sweep frequency ranges and output voltage: LO Bond — 2.5 to 5.5 MHz ±1 dB at 0.5 volts RMS fundamentals, and 10.7 MHz on harmonics. IF Bond — 38 to 45 MHz ±1 dB, at 0.5 volts RMS, fundamentals. RF Bond — 64 to 72 MHz ±1 dB at 0.5 volts RMS fundamentals, and 192 to 198 MHz on harmonics. Attenuator: Total of 70 dB of attenuation in seven steps — 1, 3, 6, 10, 10, 20, 20 and 20 db. Power requirements: 120 volts, 60 Hz AC at 20 watts. Dimensions: 13 3/4" W. x 5 1/2" H. x 12 1/2" D.

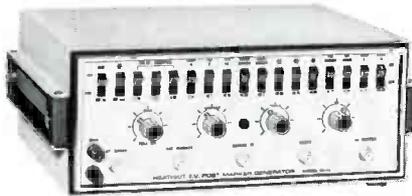

DON'T NEED THE SWEEP?

The IG-14 has the same features and specifications — without the sweep.

Kit IG-14

12 lbs. shpg. wt.

\$99.95



Free 1969 Heathkit Catalog

Describes these and over 300 other kits for test, stereo/hi-fi, color TV, SWL, Amateur Radio, CB, Marine, Educational, home and hobby. Save up to 50% the easy and enjoyable Heathkit way. Just mail coupon or write: Heath Company, Benton Harbor, Michigan 49022.

HEATH COMPANY, Dept. 25-3
Benton Harbor, Michigan 49022

Enclosed is \$ _____, plus shipping.

Please send model (s) _____

Please send 1969 Heathkit Catalog.

Name _____ (please print)

Address _____

City _____ State _____ Zip _____

(Prices and specifications subject to change without notice)

TE-182R

Circle 21 on literature card

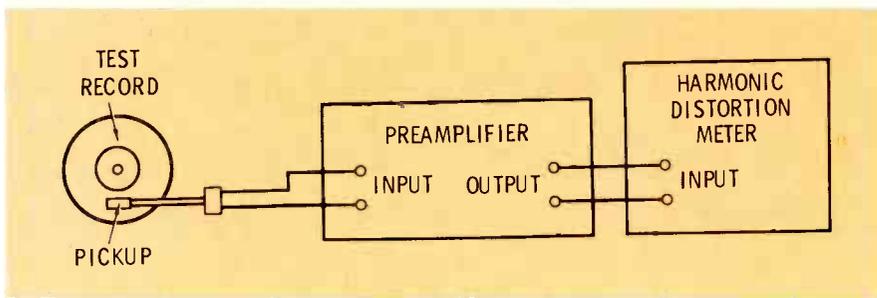


Fig. 7 Test setup for measuring harmonic distortion.

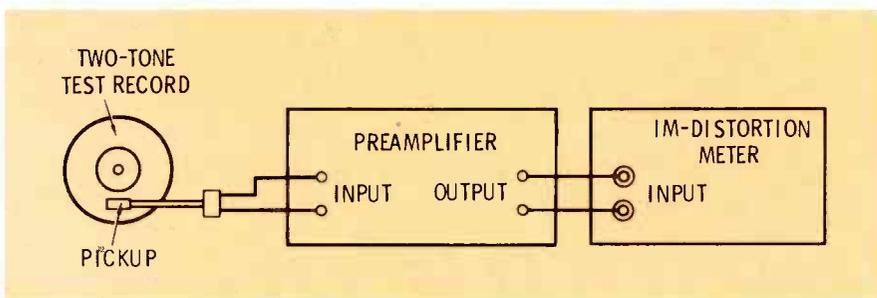


Fig. 8 Test setup for measuring intermodulation distortion using two-tone test record.

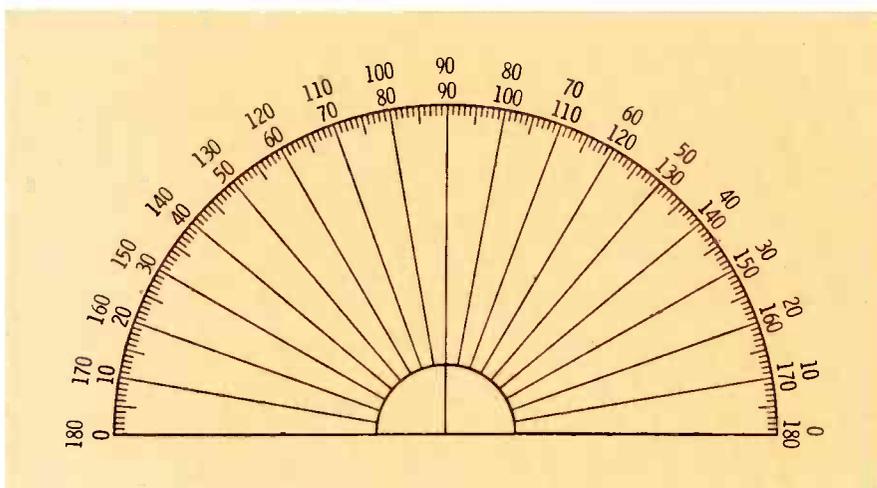


Fig. 9 Protractor can be used for measuring stylus angle.

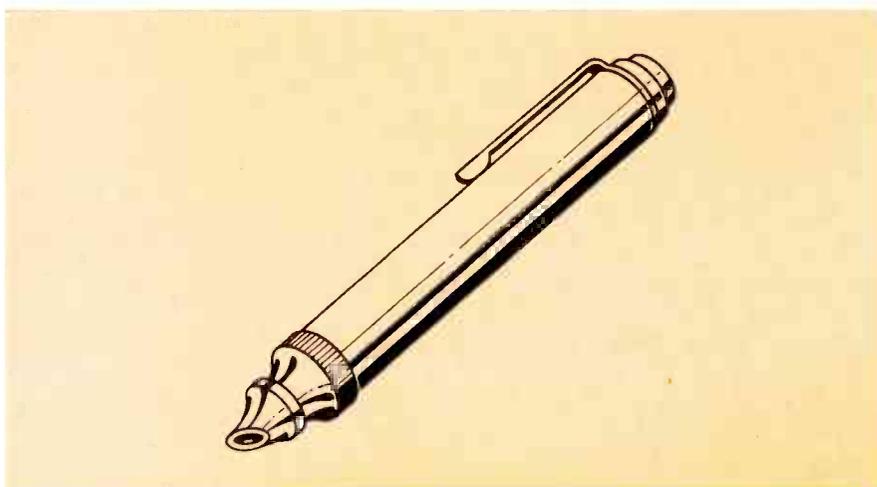


Fig. 10 Fifty-power microscope for visually inspecting condition of stylus.

chanical distortion, it is generally impractical to correct the trouble—replacement should be made at the outset.

Observation of Stylus Tip

Unless a new stylus is used in making performance measurements, it is a good practice to inspect the stylus for wear with a 50-power stylus inspection microscope, as shown in Fig. 10. If the stylus shows signs of wear, it should be replaced before playing a test record. By the same token, a test record should be checked periodically for harmonic and IM distortion, using a good stylus. When the test record begins to show appreciable distortion, it should be discarded.

Measurement of Turntable Speed

A turntable must rotate at constant speed, even during lightly and heavily recorded passages. Turntable speed is conveniently measured with a stroboscopic disc illustrated in Fig. 11. The strobe disc is viewed under a neon or fluorescent light powered from a 60-Hz source. One of the barred circles will appear to stand still, or to rotate slowly clockwise or counterclockwise. Motionless bars indicate the calibrated speed of the particular barred circle. Clockwise rotation indicates that the actual speed is slower.

In some cases, the barred circle will appear to stand still momentarily, rotate for a while, and then stand still again. This trouble is sometimes caused by oil or other foreign substances on the drive wheel. These parts can be cleaned with alcohol.

The same trouble symptom can be caused by defective turntable or motor bearings. Also, there may be unsuspected mechanical interference, such as the turntable rubbing against some surface or object.

Wow

If a turntable does not rotate at constant speed, the condition is technically termed **wow**. It is basically a mechanical form of frequency modulation. Economy-type turntables may be unsatisfactory for hi-fi reproduction because of marginal motor power and lack of sufficient flywheel effect. A strobe disc test under playing conditions will disclose wow which, in this case, can-

not be eliminated.

Motor and turntable units are often specified by manufacturers for motor type, power consumption, and the torque required to brake the turntable from a given speed to a lower speed (such as from 78 rpm to 77 rpm). Torque denotes a twisting force, as depicted in Fig. 12. The magnitude of torque is expressed as the product of force and distance (F and r in Fig. 12.) Braking torque for a turntable is stated in ounce-inch units.

Of course, wow will become evident if the motor is operated at sub-normal line voltage. Noticeable wow will be observed on heavily recorded passages. Another obvious cause of wow is a warped record; the tolerable limit of warp is about 1/16 inch. Special instruments are available to measure wow, and indicate the percentage in rms deviation of a tone frequency with respect to its average frequency. However, a strobe disc serves the same purpose for routine shop tests. The only requirement in strobe-disc application is that the changes in apparent speed of bar rotation be observed carefully. When wow is slight, it might be overlooked in an off-hand test.

Flutter

Flutter is related to wow, but has a comparatively higher deviation rate. The human ear is more sensitive to flutter than to wow. Flutter is usually caused by small defects in the motor or the mechanical drive system. It tends to occur in units that have been in extended service, with little or no attention to lubrication. The resulting wear causes poor mechanical fit, which must be corrected by replacement of the faulty parts. Although flutter meters are available, a strobe disc serves adequately for routine shop tests. Both wow and flutter meters are comparatively expensive instruments, and their cost can be justified only by the larger shops or labs.

Understandably, a turntable must be level to provide optimum performance. A typical turntable level is illustrated in Fig. 13. The turntable must also be free from wobble, and should maintain its level against moderate vertical pressure near the edges. If a wow and/or flutter meter is available, note that a meter reading of less than 1% is considered acceptable. A good hi-fi turntable


NOW - CHECK ALL TRANSISTORS IN OR OUT OF CIRCUIT . . .



all regular transistors plus the new field effect transistors.

You won't be stopped when you run into the new FETs that are wired into the latest hi-fi, newest TV receivers and nearly every other new device coming on the market. For the very first time, you can check them all, in or out of circuit. The TF151 works every time using tried and proven signal injection techniques. New, improved tests on special RF transistors and the latest high power transistors, mean that the TF151 is the only up-to-date transistor tester on the market. A new, exclusive setup book in rear compartment guides you to every test for over 12,000 transistors and FETs. The book is not needed for general service troubleshooting. Regular transistors are checked for beta gain and I_{cbo} leakage. FETs are checked for transconductance and I_{gss} leakage. **only \$129⁵⁰**

Your distributor just got this new tester in stock.
See him, it obsoletes all others.



SENCORE

NO. 1 MANUFACTURER OF ELECTRONIC MAINTENANCE EQUIPMENT
426 SOUTH WESTGATE DRIVE, ADDISON, ILLINOIS 60101

Circle 22 on literature card



Fig. 11 Stroboscopic disc for measuring turntable speed.

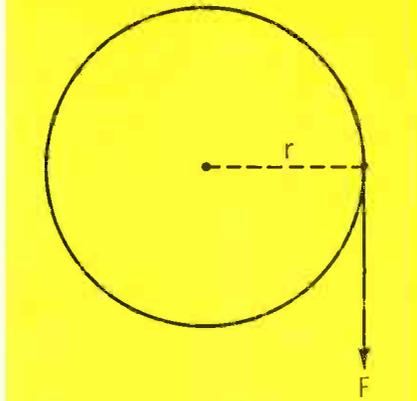


Fig. 12 Illustration of twisting force called torque.

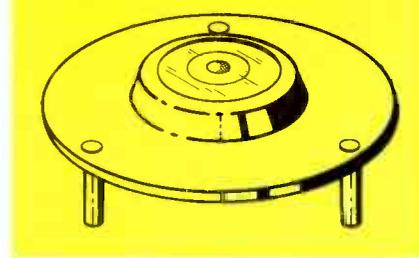


Fig. 13 Device for leveling a turntable.

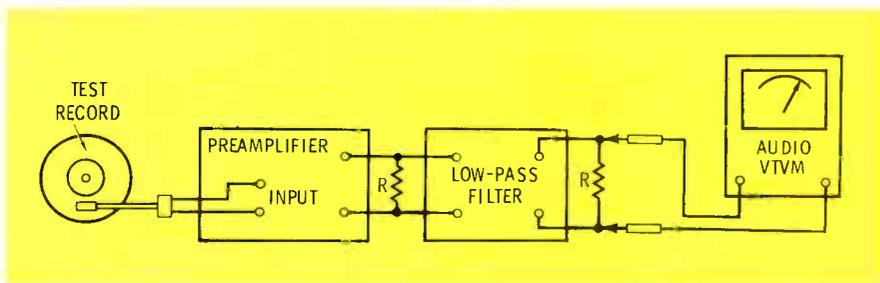


Fig. 14 Test setup for measuring rumble.

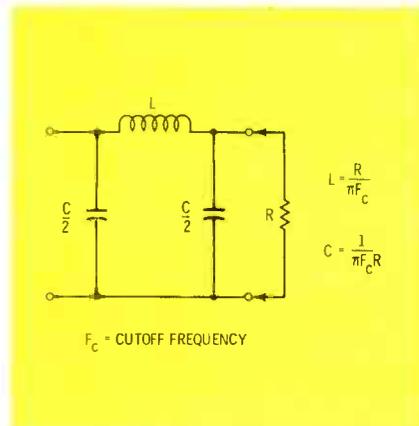


Fig. 15 A single-section, low-pass Pi filter used in rumble test.

may show as little as 0.1% wow or flutter, even on heavily recorded passages.

Rumble

Both wow and flutter are distinguished from **rumble**. Rumble consists of a series of random pulses (not a cyclic low-frequency interference). It is caused by vibrations within the player, and is often described as noise "like furniture moving around upstairs." A scope test quickly shows whether interference has a rumble waveform—the pattern is random and does not have a steady cyclic form in the case of rumble. Although rumble can be reduced or eliminated by means of an amplifier rumble filter which cuts off sharply below 50 Hz, it is obviously desirable to correct the cause of the rumble if it is practical to do so.

When rumble is a problem, check the motor for vibration. Any mechanical defect that causes vibrations to be transmitted to the turntable can cause rumble. Note that rumble can be measured, using the

test setup shown in Fig. 14. The low-pass filter has a cutoff frequency of approximately 300 Hz. The test procedure is as follows:

First, the low-pass filter is removed from the circuit, and the output is measured using a 1-KHz test record. The preamplifier controls are adjusted for maximum-rated output and flat frequency response. Then, the low-pass filter is connected into the test circuit, and the VTVM sensitivity is advanced to obtain a convenient reading. Finally, lift the pickup from the test record and note any change in VTVM reading. The amount of rumble is expressed as the number of dB below maximum rated output from the preamplifier.

Let us briefly consider the component values used in a low-pass filter. With reference to Fig. 15, choose a cutoff frequency, f_c , and a terminating resistance, R . Then find the required values of L and C as indicated. For example, if $f_c = 300$ Hz, and $R = 75$ ohms, then $L = 80$ mh and $C = 0.071$ mfd. One-half of C , or 0.035 mfd is connected at

each end of L to form the filter. A sharper cutoff characteristic can be obtained by connecting several filter sections in series. (Note that the inductors of the multi-section filter must not couple into one another.)

Conclusion

Although other types of tests are made in audio laboratories, these are generally out of the question for the service shop because of the costly test equipment that is required. For example, measurement of the static compliance of a stylus requires a calibrated shadowgraph and a sensitive balance. However, the simpler tests that have been explained in this series of articles permit almost any service problem to be solved with a minimum of time and effort. Apprentice technicians are often awed by ordinary harmonic and intermodulation distortion meters, and occasionally by a scope. However, practice makes perfect, and the modern shop cannot hope to remain competitive unless modern test equipment is utilized. ▲

This tough customer from GE knocked the confusion out of color picture tubes!

It took GE's Willie Gorrell, a real *tough customer*, to end the head-scratching confusion you used to face when you needed a replacement color picture tube. General Electric's CRT production chief got right to the heart of the problem, tossed out the multi-line bewilderment and made possible *one* high-quality line—ULTRACOLOR. Now one line has a tube for every make and model . . . no more baffling combinations of specs, screens, glass and guns. ULTRACOLOR tubes are manufactured to all the essential original equipment specifications, utilize rare earth phosphor (except older types which *will* be identified as sulfide phosphor, if of that type), have new guns, and may or may not utilize used glass and other materials. Make ULTRACOLOR CRT's your choice every time. Look for the new white carton at your General Electric distributor's store.

288-27

GENERAL  ELECTRIC



A look at RCA's solid-state color

Part 4/by Ellsworth Ladyman

The horizontal section of the CTC40 is discussed in this, the final installment of a series of articles analyzing the circuitry employed in this manufacturer's first solid-state color chassis.

Horizontal AFC and Oscillator

The function of an automatic frequency control (AFC) circuit in the horizontal section of a television receiver is to hold the horizontal oscillator frequency at exactly the same frequency and phase as the broadcast horizontal sync pulses. Color television receivers demand even more exact performance from the horizontal AFC circuit because the color burst amplifier is keyed by pulses obtained from the horizontal circuit. Any change in frequency or phase existing between the occurrence of color burst and the horizontal keying pulse for the burst amplifier will result in an incorrect color display.

The design of the AFC circuit employed in the CTC40 chassis is such that it will hold the horizontal oscillator at the exact frequency of the incoming horizontal sync pulses as long as the free-running frequency of the oscillator is within a tolerance of ± 300 Hz of the broadcast horizontal sync signal.

Theory of Operation

The horizontal AFC and oscillator circuitry is illustrated schematically in Fig. 1. The phase splitter stage supplies equal and opposite sync pulses to the familiar dual-diode phase detector. Incoming sync pulses are differentiated at the base of the phase-splitter transistor to reduce interference from the vertical sync pulses that are present in the output of the sync separator.

Output pulses from the collector

and emitter of the phase splitter are coupled to the phase-detector diodes by capacitors C1 and C2.

A reference voltage taken from the high-voltage transformer is applied to the common diode junction through a waveshaping network. This network shapes the negative-going pulses from the high-voltage transformer into a sawtooth signal that is applied to the AFC circuit. The frequency of the pulses sampled from the high-voltage transformer is the same as that of the horizontal oscillator.

When the pulses from the high-voltage transformer and the incoming horizontal sync pulses occur at the exact same frequency, each diode is keyed into conduction by the sync pulses as the reference voltage passes through zero. The current through each diode will be equal, resulting in equal and opposite charges on capacitors C1 and C2. As these capacitors discharge through resistors R1 and R2, equal and opposite voltages are developed across the resistors. The voltage at their junction is zero (with respect to ground), and, consequently, the amount of correction voltage developed is zero.

If the horizontal oscillator is running at a frequency less than that of the incoming horizontal sync pulses, a change in the relative position of the reference voltage waveshape during the application of the sync pulses will result. The sync pulses will key the diodes into conduction during the positive portion

of the retrace slope; diode X1 will conduct more strongly than diode X2; and the charge on capacitor C1 will become more positive, while the charge on capacitor C2 will become less negative.

Discharge action of these capacitors through resistors R1 and R2 will result in an imbalance of current flow through R1 and R2, and the voltage developed at their junction will go positive. This positive voltage is the correction voltage for the horizontal oscillator and will cause the oscillator to increase in frequency.

Should the oscillator be running at a frequency greater than the incoming sync pulses, a negative correction voltage will be developed at the junction of R1 and R2 as the result of circuit action similar but opposite to that described in the preceding paragraph. Application of the negative correction voltage to the oscillator will produce a decrease in the oscillator frequency.

The DC correction voltage present at the junction of R1 and R2 is fed to an AFC limiting and filtering circuit comprised of diodes X3 and X4, capacitors C3 and C4, and resistor R3. The function of this circuit is two-fold: The limiting diodes prevent the AFC correction voltage from exceeding -0.5 V to 0.5 volts; and the filter network prevents the AFC output from being contaminated by unwanted frequencies, such as 60 Hz. (A 60-Hz signal present at this point would result in horizontal bending, twisting, etc.)

Horizontal Oscillator

A blocking oscillator circuit is employed as the horizontal oscillator in the CTC40 chassis. Basic circuit action is as follows:

Voltage pulses present on the collector of the horizontal oscillator transistor are transformer-coupled into the base circuit, driving the stage into cutoff. During the time that the oscillator transistor is cutoff, capacitor C5 discharges through the horizontal hold control circuitry to the "turn-on" potential of the oscillator. The oscillator conducts, a pulse appears at the collector and is coupled to the base, and the cycle repeats.

The settings or adjustments of the horizontal linearity and horizontal hold controls determine the discharge time of capacitor C5 or, in other words, the length of time the

yoke current must also provide a means of returning the CRT beam to the starting side of the CRT screen. The current that accomplishes this is referred to as retrace, or flyback, current.

Circuit Action

A partial schematic of the horizontal output circuit is shown in Fig. 2. Diode X1 and silicon-controlled rectifier SCR1 control the flow of current through the horizontal yoke windings during the CRT beam trace time. Diode X2 and silicon-controlled rectifier SCR2 con-

trol the flow of current through the horizontal yoke windings during retrace time.

Energy storage and timing properties are provided in the circuit by components L1, C1, C2 and Cy. Inductors L2A and L2B provide a charge path for L1 and C1, and a gating, or keying, signal to SCR1. The complete horizontal-deflection yoke-current cycle can be divided into a sequence of individual actions involving different modes of horizontal circuit operation. These actions are accomplished during discrete intervals of the horizontal de-

flection yoke current cycle.

During the first one half of CRT beam trace time, the current through the horizontal deflection coils decreases towards zero and flows through trace diode X1, resulting in a charge build-up on capacitor Cy. During this interval (first half of trace time), silicon controlled rectifier SCR1, the trace SCR, is prepared for conduction by the application of the proper gate-voltage pulse. However, the SCR1 will not conduct until its anode/cathode junction is forward biased. This condition will be satisfied during the sec-

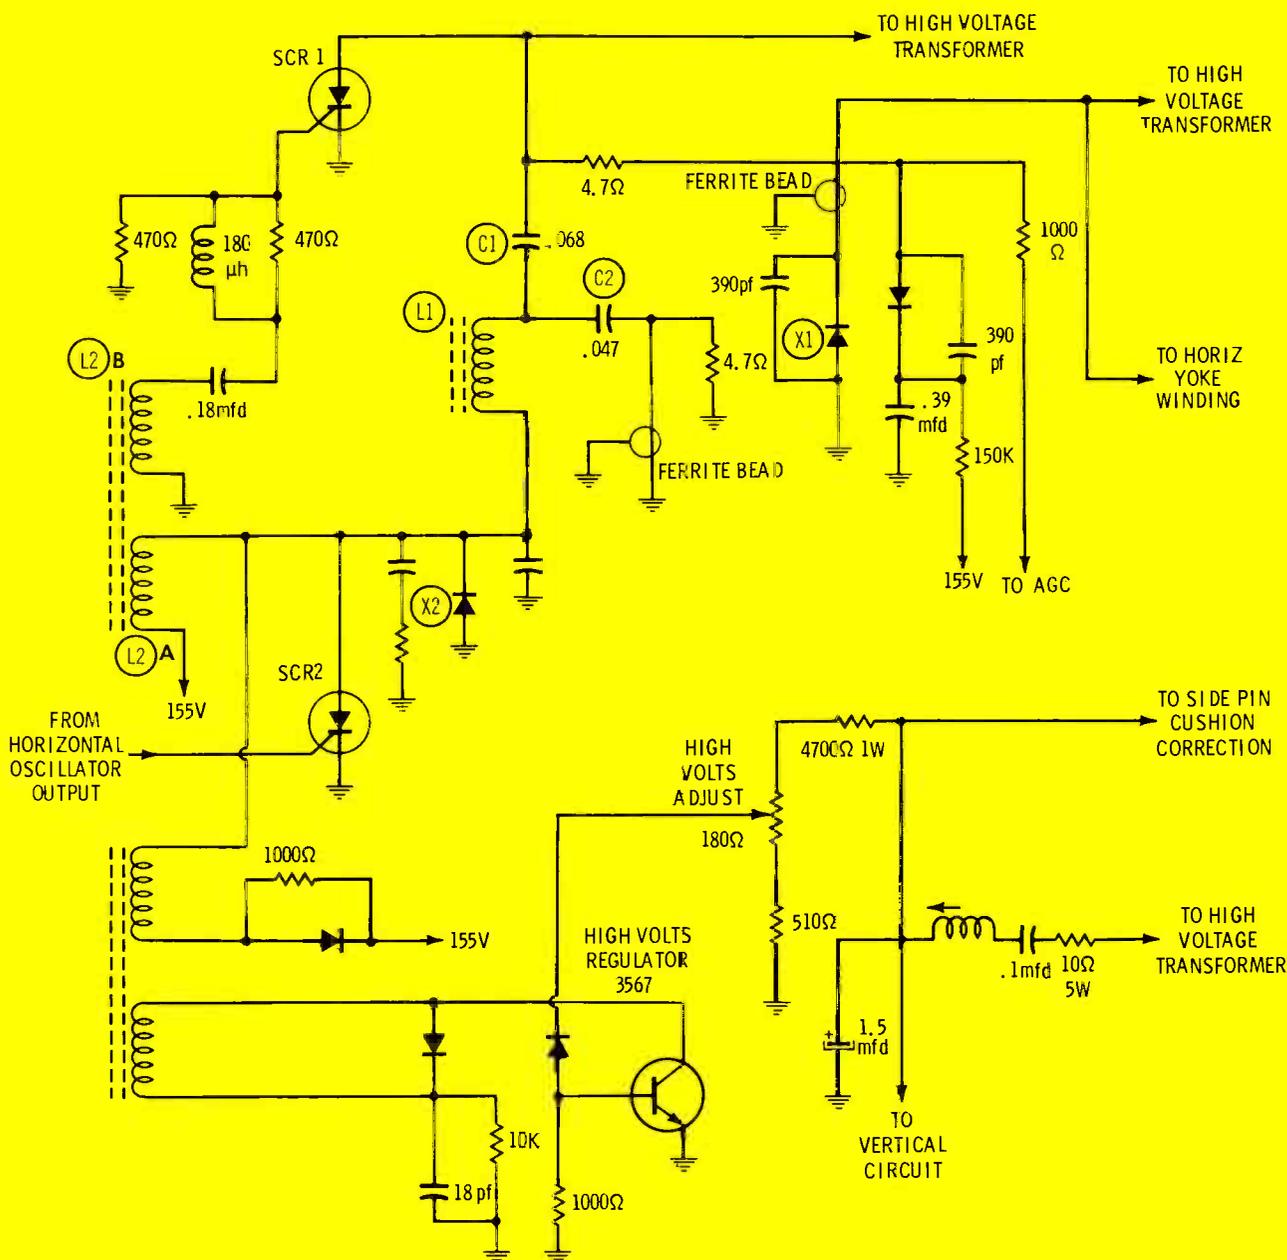


Fig. 2 Partial schematic diagram of horizontal output circuitry found in CTC40.

ond half of the beam trace cycle.

At the end of the first half of trace, yoke current reaches zero, capacitor C_y starts discharging through the yoke inductance, and the current flow through the circuit reverses, reverse-biasing diode X_1 and, simultaneously, forward biasing the SCR1. The capacitor discharges into the yoke inductance through SCR1 and the resulting yoke current completes the second half of trace.

When the second half of trace is concluded, the CRT beam has scanned across the entire width of the CRT screen. At this point, a pulse, derived from the horizontal oscillator circuit, keys the retrace SCR into conduction. This action releases the charge previously built up, or stored, on capacitor C_y , and current flows into the commutator circuit comprised of inductor L_1 and capacitor C_1 .

Because of heavy forward current flow through the yoke circuit (SCR1, L_y and C_y), the net current resulting from the combined circuit actions of the commutating switch circuit and the yoke circuit continues to allow the trace rectifier, SCR1, to conduct.

At this point both rectifiers, SCR1 and SCR2, are conducting. However, the current flowing in the commutator circuit increases much more rapidly than the current flow in the yoke circuit. After an extremely short period of time (two to three microseconds) the net current flowing in SCR1 reverses, turning off SCR1 at the start of retrace.

Circuit conditions are now set to initiate retrace: Trace rectifier SCR1, along with diode X_1 , is cut off, and retrace rectifier SCR2 is conducting. The result is a series resonant circuit comprised of inductor L_1 , capacitor C_1 and the horizontal yoke windings. (Capacitor C_Y is also in series with these components, but, because of its value, can be disregarded.)

The current through this circuit causes the CRT beam to retrace half way across the screen. At this point the current flow has decreased to zero. Current flow in the series resonant circuit now reverses, and retrace rectifier SCR2 ceases conduction because the current flow in the circuit is opposite the normal flow of forward current.


Diode X_2 is now forward-biased

THE FIRST REALLY COMPLETE SCOPE



NEW OSCILLOSCOPE/VECTORSCOPE

With just the flip of a switch

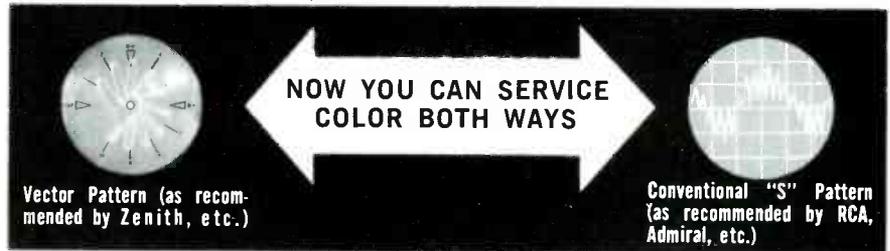

A truly remarkable service scope; complete for every servicing test recommended by any and all TV manufacturers. For the very first time, here is a scope sensitive enough to view the IF tuner output but with adequate high voltage protection to view the plate of the horizontal output tube directly. Leave the rear view switches in their normal position and you can use the PS 148 to service color TV from chroma take off to the tri-color tube following the standard RCA "S" pattern approach. Flip the VECTOR switch on the rear and you have converted to a standard vectroscope . . . and for only \$20.00 more than the Sencore scope without vectors. Compare these specifications and you will be convinced that the PS 148 is the most complete, versatile scope on the market today.

- **Direct Peak to Peak Voltage Measurements.** Read the peak to peak waveform voltage directly from the vertical input controls. Faster and easier than a VTVM and extremely accurate.
- **Wide Band.** Vertical amplifier frequency response is flat from 10HZ to 5.2MHZ \pm 1DB.
- **High Sensitivity.** Vertical amplifier sensitivity of .017 volts RMS per one inch deflection. Ultra sensitive for transistor servicing and for viewing signals directly off a TV tuner.
- **Direct and Lo-Cap Probe** on one cable for maximum versatility. The Lo-Cap probe can handle high voltage signals up to 6000 volts peak to peak.
- **Extended Horizontal Sweep Frequencies.** Horizontal sweep ranges from 5HZ all the way to 500 KHZ in five overlapping steps; allows you to look at higher frequency waveforms. Sync is so positive you would think it has triggered sweep.
- **Exclusive Vectorscope Features.** Flick one switch at the rear of the PS 148 and you have an easy to use vectroscope. This new vector pattern greatly simplifies chroma trouble shooting and bandpass alignment.
- **Minimum Circuit Loading on Vectors.** Prevents distorted vector patterns due to lead capacity loading by having vectroscope connections on rear of PS 148.
- **Special Vectorgraph Screen.** Shows exact degree of chroma demodulation.
- Provisions for intensity modulation and direct connections to CRT deflection plates on rear for forming lissajous patterns, etc. Just a flick of two switches; no need to disconnect leads or make special connections.

PS 148

\$229⁵⁰



SENCORE

NO. 1 MANUFACTURER OF ELECTRONIC MAINTENANCE EQUIPMENT

426 SOUTH WESTGATE DRIVE, ADDISON, ILLINOIS 60101

Circle 23 on literature card

Use Aerovox capacitors available from your local AEROVOX DISTRIBUTOR

He's your best "one-stop" source for virtually every replacement capacitor you require. He carries the complete Aerovox line which includes: ceramics, micas, electrolytics, papers, film and interference filters. So no matter what your replacement requirement, you're sure to find it at an Aerovox Distributor.

service it
FAST
with
components
that
LAST!



AEROVOX
Hi-Q
AEROVOX
 CORPORATION

DISTRIBUTOR SALES, New Bedford, Mass. 02741
 Circle 24 on literature card

by this reversal of current and starts conducting, supplying the energy for the remainder of retrace. The energy previously stored on capacitor C1 has been returned to the yoke inductance.

Retrace current flowing in the horizontal yoke winding returns the electron beam to its starting point. The time interval of yoke retrace current flow is made equal to the desired retrace time by selection of the proper values of components L1, C1 and Ly.

These components are selected to be resonant at a frequency which has a period equal to two times the retrace time interval. Therefore, the current flowing during one half cycle of circuit oscillations will accomplish the full retrace function.

After completion of one full cycle (trace and retrace), the circuit must be made ready for the next cycle. This includes restoring energy to the commutator circuit and resetting the trace rectifier, SCR1. Both of these functions are performed by utilizing circuitry which includes inductor L2.

During retrace, inductor L2 is connected between B+ and ground

by the conduction of SCR2 and diode X2, respectively. When X2 ceases conduction, inductor L2 is removed from ground. A charge is built up on C1 from the B+ line through inductor L2. This charging process continues throughout the trace interval, until retrace begins. The charge on C1 serves to replenish energy to the yoke circuit during the retrace interval.

The voltage developed across inductor L2 during the charging of capacitor C1 is used to forward-bias the gate of SCR1. This sets up SCR1 and enables it to conduct upon receiving the proper signal. The voltage developed across inductor L2 is coupled to the gate of SCR1 via L2A, C2 and R1.

These components form a wave-shaping network that forms a pulse with the proper shape and amplitude to enable SCR1 to conduct when its anode/cathode junction is forward-biased. This will occur approximately mid-way through the trace interval.

This concludes our analysis of RCA's solid-state CTC40 color chassis. (Schematic diagrams used in this article series courtesy of RCA.) ▲

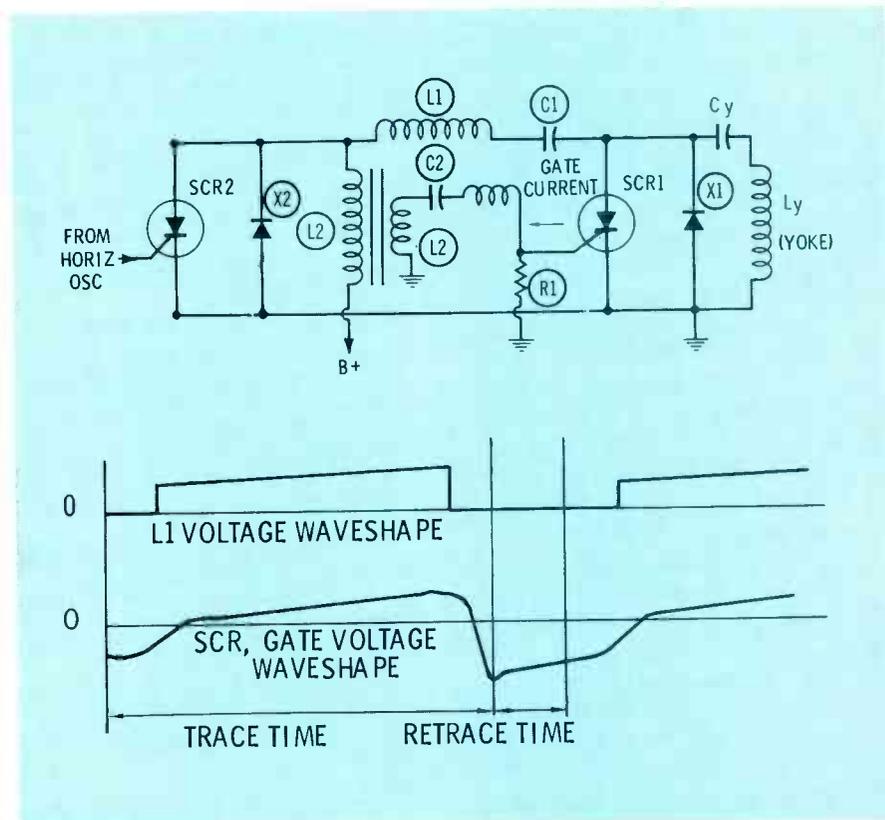


Fig. 3 Simplified schematic of horizontal output circuit, and diagram showing instantaneous voltages across L1 and SCR1 during trace and retrace times.

bookreview

Using Scopes In Transistor Circuits:

Robert G. Middleton, Howard W. Sams and Company, Inc., Indianapolis, Indiana, 1968; 192 pages, 5½" x 8½", soft cover, \$4.50 (Catalog No. 20663).

Written chiefly for the electronics technician, this text tells how and when to use oscilloscopes in transistor circuits, with special emphasis on scope waveform analysis. It includes detailed discussions of waveforms and circuit theory of transistor oscillators, amplifiers, waveshaping circuits, monochrome and color TV and electronic computers.

Practical CB Radio Servicing:

R. R. Frelander, Hayden Book Company, Inc. New York, 1968; 192 pages, 6" x 9", soft cover, \$4.75.

Specifically written for professionals who must diagnose and repair CB radios quickly, the content of this text is arranged so that each chapter discusses a specific aspect of CB servicing. Thus, the book can be used as a review source for spot testing and troubleshooting techniques.

The text begins by detailing check-out procedures for both fixed and mobile units. Discussed next is a step-by-step method for measuring transmission and receiving frequencies for optimum performance and compliance with FCC rules, followed by measurement and corrective procedures for modulation and symmetry, input and output power, sensitivity and selectivity.

Later chapters are devoted to diagnosing and repairing receiver, transmitter and power supply troubles. Causes and cures of interference are also discussed.

Rounding out the content is an overall review of CB equipment and applications, and a glossary of CB radio terms. ▲

GIVE...
So more will live
**HEART
FUND**



Tired of
hand-me-down
copies of
**ELECTRONIC
SERVICING?**

Fourth page of a five-page article missing by the time **you** get to read **ELECTRONIC SERVICING**? Schematic diagram missing? Then you need a subscription of your own! Priced right and packed with profitable information each month! Use the convenient order form inside the back cover of this issue! P.S. If that's missing, too, send us a note with your name and address—we'll contact **you** with full details!

DISHONEST

“ You might think so when you see Mercury's unbelievable values. You get all the equipment you need for fast, accurate, profitable Color TV servicing at low, low prices. We tell it like it is. ”



Kit—\$10995
Wired—\$15995

Model 3000—5" High Sensitivity 5 Mc OSCILLOSCOPE-VECTROSCOPE

Precision engineered to fill all your requirements for waveform observation—Color and B/W. Top quality construction and circuitry make model 3000 ideal for TV technicians, electronic experimenters, development engineers as well as for applications in Technical Schools and Industry. Includes Vectorscope calibrations on the calibrated Graticule, permitting vectorscope analysis through access to the deflection plates at rear of unit. A significant analysis tool in Color TV servicing. VERTICAL AMPLIFIER: Sensitivity—10 Mv RMS/Cm • Frequency Response—10 Hz to 5 Mc ± 3 Db • Rise Time—0.08 Microsecond. HORIZONTAL AMPLIFIER: Frequency Response—5 Hz to 500 KHz ± 3 Db • Sweep Range—5 Hz to 500 KHz, continuously adjustable.



\$8495 (Available in AC operated model—\$8995)

Model 1901—Solid State, Battery Operated COLOR GENERATOR

Offers every essential feature needed to install and service Color TV. Pre-tested rock solid pattern stability under extremes of heat and cold. Exclusive: Line Width and Dot Size Adjustment • Crystal Controlled • Gun Killers.



Model 4000—FIELD EFFECT VOLT-OHM-MILLIAMMETER—6" METER

High impedance, Solid State unit assures instant operation and permanent operating stability. Combines advantages of standard VTVM and FET circuitry. DC current ranges up to 1 Amp. Operates on both AC and Battery.

\$6995

ALL MERCURY TEST EQUIPMENT GUARANTEED FOR ONE FULL YEAR!
UPDATED TUBE TEST DATA AVAILABLE ON ALL UNITS.

MERCURY ELECTRONICS CORPORATION

315 ROSLYN ROAD, MINEOLA, N. Y. 11501 • (516) 742-5400

CANADA: WILLIAM COHEN CORP., 8900 PARK AVE., MONTREAL 11

EXPORT: SINGER PRODUCTS CO., INC., 95 BROAD ST., N. Y. C. 10004, U.S.A.

Circle 25 on literature card

Test equipment available for TV servicing

The test equipment described in the following pages is representative of the quality, variety and cost of common test instruments currently available for servicing both b-w and color TV.

The list does not include all items currently available. Included are only the instruments of those manufacturers who respond to our request for information. (NA indicates that the information was not available at press time.)

Compare the characteristics of the test equipment you are currently using with those of the instruments listed here. If yours comes out second best, perhaps it is time you considered updating your test equipment inventory.

Color-bar generators

AMPHENOL MODEL 865

Patterns

Color:

- Keyed rainbow
- Three-bar (80°, 180°, 270°)
- Single bar, variable between 30° and 300°

Convergence:

- Crosshatch (20 x 15 lines)
- Dots (300 in 20 x 15 array)
- Horizontal lines
- Single crossbar (movable)
- Single dot (movable)
- Vertical lines

Outputs

RF:

All patterns, channels 3 or 4, level variable to about 50 mv p-p

Video:

All patterns, black positive, level fixed at about 1 volt p-p

Chroma Level:

Level variable 0-200%

Power Requirements:

Battery—12 AA cells
Line—115V AC, 60 Hz



Size (HWD):
6 $\frac{5}{8}$ " x 9 $\frac{1}{4}$ " x 5"

Weight:
4 lbs.

Price:
\$189.95

B&K MODEL 1242

Patterns

Color:

Keyed Rainbow (crystal controlled)

Convergence:

- Crosshatch (9 x 14 lines)
- Dots
- Horizontal lines
- Vertical lines

Outputs

RF:

Channels 3 or 4, level fixed to 5 mv p-p

Chroma Level:

Variable 0-200%

Added Features:

Gun killers

Power Requirements:

Line—115V AC, 60 Hz



Size (HWD):

7" x 2 $\frac{1}{4}$ " x 9 $\frac{3}{8}$ "

Weight:

3 lbs.

Price:

\$99.95

B&K MODEL 1245



Patterns

Color:

Keyed rainbow (crystal controlled)

Convergence:

- Crosshatch
- Dots (0.25 microseconds wide)
- Horizontal lines
- Vertical lines

Size (HWD):

2 $\frac{7}{8}$ " x 8 $\frac{7}{8}$ " x 8 $\frac{1}{2}$ "

Weight:

3 lbs.

Price:

\$139.95

EICO MODEL 385

Patterns

Color:

Keyed rainbow (crystal controlled)

Convergence:

- Crosshatch
- Dots
- Horizontal lines
- Vertical lines



Added Features:

Gun killers

Size (HWD):

2 1/2" x 8 2/3" x 8 3/8"

Weight:

7 lbs.

Price:

\$109.95 (wired)

\$79.95 (kit form)

HICKOK MODEL 661

Patterns

Color:

- 6 separate NTSC color bars (each bar covers 2/3 of screen)
- 4 phase test signals (R-Y, B-Y, G-Y/90 and -G-Y)

Convergence:

- Crosshatch (15 x 20)
- Dots (approx. 300)
- Horizontal bars (15)
- Vertical bars (20)

Outputs

RF:

- channels 3 and 4, all pattern, variable gain control

Video:

- All patterns available at separate video jack

Chroma Level:

Fixed, on/off switch provided

Power Requirements:

105-125V AC, 60 Hz

Size (HWD):

11 1/16" x 15" x 1 1/8"

Weight:

18 1/2 lbs.

Price:

\$359.50

LEADER MODEL LCG-387


Patterns

Color:

Keyed rainbow

Convergence:

- Crosshatch (11 x 14 lines. Horizontal bars are one scan line wide, with blanking. Vertical bars are 0.2 us wide with 4 us spacing)
- Dots (at crosshatch intersections)
- Single Crossbar (centered on raster)

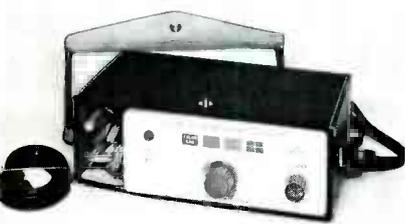

Outputs

RF:

- Ch. 5 or 6 ±0.5%, switch selectable. 10 mv on open circuit

Chroma Level:

Variable

Added Features:

Solid-state

Power Requirements:

115V AC, 2 watts

Size (HWD):

2 3/4" x 6 3/4" x 4 3/4"

Weight:

3 1/2 lbs.

Price:

\$140.00

LECTROTECH MODEL V6-B

Patterns

Color:

Keyed rainbow (crystal controlled)

Convergence:

- Crosshatch
- Dots (size adjustable)
- Horizontal lines (width adjustable)
- Vertical lines

Outputs

RF:

Channels 3, 4 or 5 (+10,000 mv)

Chroma level:

Variable

Added features:

- Dial-a-line
- Gun killers
- Hand-wired circuitry

Power Requirements:

115V AC, 60 Hz

Size (HWD):

3 1/2" x 7 5/8" x 9"

Weight:

5 1/2 lbs.

Price:

\$99.50

RCA MODEL WR-64B



Patterns

Color:

Keyed rainbow

Convergence:

- Crosshatch
- Dots

Added Features:

- Chroma variable
- Standby Switch

Size (HWD):

10" x 13 1/2" x 8"

Weight:

13 1/2 lbs.

Price:

\$129.00

RCA CHRO-BAR MODEL WR-502A

Patterns

Color:

Keyed rainbow

Convergence:

- Blank raster
- Crosshatch



Dots

Horizontal lines

Vertical lines

Added Features

- Gun killer switches
- All solid-state circuitry
- Battery condition-indicating meter

Size (HWD):

6 1/2" x 7 1/2" x 4"

Weight:

4 lbs.

Price:

\$168.00

SENCORE MODEL CG10

Patterns

Color:

Ten standard RCA-licensed color-bar patterns (NTSC phased colors)

Convergence:

- Crosshatch (14H x 10V)
- Dots (adjustable)
- Horizontal lines
- Vertical lines

Chroma Level:

Variable to 200%

Added Features

- Interlace control (eliminates "dot bounce" due to receiver chassis design variations)

All solid state

Gun killers

Power Requirements:

Battery (Zener regulated 12-volt supply)

Size (HWD):

10" x 8 3/8" x 3 1/8"

Weight:

8 lbs.

Price:

\$89.95



SENCORE MODEL CG12

Patterns

Color:

Keyed rainbow



Convergence:

- Crosshatch (14H x 10V)
- Dots (adjustable size)
- Horizontal lines
- Vertical lines

Chroma Level:

Variable to 200%

Added Features:

- 4.5-MHz crystal controlled signal modulated into the RF
- Color gun killer switches
- Positive or negative picture phase
- Solid state

Power Requirements:

120V AC, 60 Hz

Size (HWD):

10" x 8 3/8" x 3 1/8"

Weight:

NA

Price:

\$109.95

SENCORE MODEL CG-141

Patterns

Color:

RCA licensed standard color bars

Convergence:

- Crosshatch
- Dots
- Horizontal lines
- Single cross (can be placed anywhere on CRT)
- Single dot (can be placed anywhere on CRT)
- Vertical lines

Outputs

RF:

Ch. 2 through 6

Chroma Level:

Variable to 200%



Added Features

- Interlace control (eliminates "dot bounce")
- Crystal-controlled sound carrier
- All solid state
- Gun killers
- Size (HWD):**
10" x 9" x 3 1/2"

Weight:

9 lbs.

Price:

\$149.95

**SENCORE COLOR ANALYZER
MODEL CA122B**

Patterns

Color:

Standard RCA licensed color bars

Convergence:

- Crosshatch
- Dots (adjustable)
- Horizontal lines
- Vertical lines
- Blank raster (no modulation)

Outputs

RF:

Ch. 2-6 variable

Video:

20 MHz to 50 MHz (for signal substitution: composite video, chroma and horizontal and vertical sync pulse)

Chroma Level:

Variable to 200%



Added Features:

- Color gun killer switches
- Combination circuit analyzer
- Video and sync variable up to 30 volts p-p

Power Requirements:

115V AC, 60 Hz

Size (HWD):

10" x 14" x 8"

Weight:

15 lbs.

Price:

\$187.50

CRT testers

AMPHENOL MODEL 855

CRT's Tested:

Color and black-and-white

Tests Performed:

- Emission
- Interelectrode shorts
- Measures anode and screen potentials
- Color gun balance
- Gas (direct meter readout)

Corrective functions:

Cathode rejuvenation



Shorts removed

Welds open cathodes

Size (HWD):

NA

Weight:

NA

Price:

\$79.95

AMPHENOL MODEL 857

CRT's Tested:

Color and black and white

Tests Performed:

- Emission
- Interelectrode shorts
- Measures DC voltage (two ranges, 0-1000 volts and 0-50,000 volts with optional TV probe).
- High-voltage internal leakage (direct meter reading)
- Gas (direct meter readout on 50-u meter)

Corrective functions:

- Cathode rejuvenation (three level, time controlled)
- Shorts removal
- Welds open cathodes



Added Features:

- Adjustable filament voltage (metered)
- G1 and G2 tests adjustable

Size (HWD):

NA

Weight:

less than 6 lbs.

Price:

\$99.50

B&K MODEL 465

CRT's Tested:

Color and black and white

Tests Performed:

- Emission
- Interelectrode shorts
- Cutoff voltage
- Life test
- Leakage

Corrective functions:

Cathode rejuvenation (three levels, time controlled)

- Shorts removed
- Open cathodes welded

Added Features:

- Variable G1 and G2 voltages
- Meter sensitivity switch for testing CRT's with normally low emission
- Calibrated heater voltage meter



Size (HWD):
10½" x 11½" x 4½"
Weight:
7 lbs.
Power Requirements:
117V AC, 60 Hz
Price:
\$89.95

HICKOK MODEL CR35

CRT's Tested:

Color and black and white

Tests Performed:


- Emission
- Interelectrode shorts
- Cut-off voltage
- Life test

Corrective functions:

Cathode rejuvenation (three levels, time controlled)

Shorts removed

Size (HWD):
10¾" x 10½" x 5¼"
Weight:
9 lbs.
Power Requirements:
117V AC, 60 Hz
Price:
\$99.95

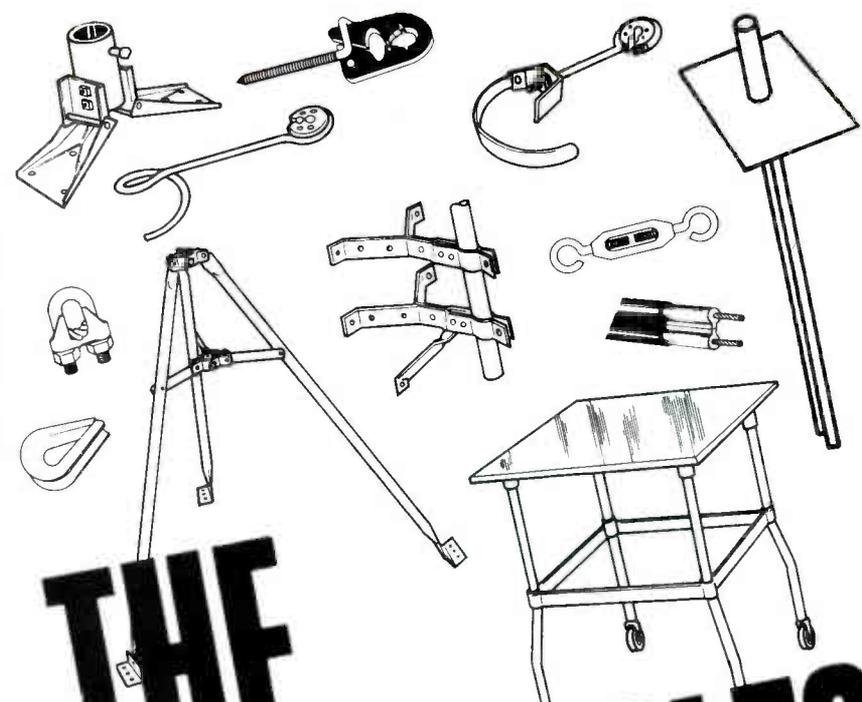

THE DEPENDABLES

ROHN® TV INSTALLATION HARDWARE AND ACCESSORIES



Careful engineering and design, rigid quality controls, craftsmanship in fabrication, plus efficiency and speed in handling orders, all combine to make the complete ROHN line of TV installation hardware and accessories the most dependable and satisfactory line available today. This same concept of quality and service, the ability to meet the needs of the trade with new ideas, will make ROHN the line you'll handle tomorrow.

Write today for free copy of NEW ROHN TV INSTALLATION HARDWARE and ACCESSORIES catalog.

ROHN®

MANUFACTURING CO.
Post Office Box 2000
Peoria, Illinois 61601
ROHN SOUTH
VULCAN TV MAST & TOWER CO., INC.
911 Thomson Ave., Post Office Box 6537
Tarrant, Birmingham, Alabama 35217

Circle 26 on literature card

LECTROTECH MODEL CRT-100

CRT's Tested:


All black-and-white and color

Tests Performed:

Emission
Interelectrode shorts
Grid-to-Cathode leakage (direct meter readout)
Color gun balance
Leakage (neon lamp)
Life tests

Corrective functions:

Cathode rejuvenation
Shorts removed

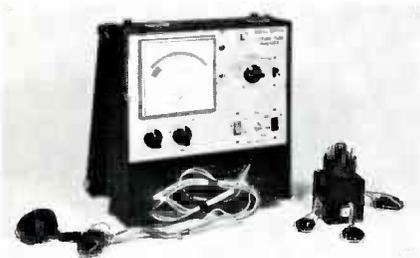

Added Features:

Line voltage adjust
Variable G2 voltage

Size (HWD):

NA

Weight:

NA

Price:

\$89.50

SENCORE MODEL CR13

CRT's Tested:

Color and black-and-white

Tests Performed:

Emission
Interelectrode shorts
Cut-off voltage
Life tests
Color gun balance (individual tests)

Corrective functions:

Cathode rejuvenation (time controlled)
Cathode to grid shorts removed
Open cathodes welded

Added Features:

Variable G1 and G2 voltages
Line voltage compensation
Replaceable plug-in socket cables

Power Requirements:

105-125V AC, 50-60 Hz

Size (HWD):

10 1/4" x 10 3/4" x 4 1/4"

Weight:

8 1/2 lbs.

Price:

\$79.95



SENCORE MODEL CR143



CRT's Tested:

All color and black and white

Tests Performed:

Emission
Interelectrode shorts
Cut-off voltage
Life tests
Color gun balance (individual tests)

Corrective functions:

Cathode rejuvenation (three level, time controlled)
Removes shorts

Welds open cathodes

Added Features:

Separate screen grid controls for each gun to duplicate receiver conditions

Power Requirements:

117V AC, 60 Hz

Size (HWD):

9" x 10" x 3 1/2"

Weight:

10 lbs., 2 oz.

Price:

\$99.50

FET meters

AMPHENOL MODEL 870



DC Volts Ranges:

0 to 0.1, 0.3, 1, 3, 10, 30, 100, 300, 1000

AC Volts Ranges:

0 to 0.01, 0.03, 0.1, 0.3, 1, 3, 10, 30, 100, 300

dB Ranges:

-40, -30, -20, -10, 0, 10, 20, 30, 40, 50, (-12 to 2 scale)

Accuracy:

±3% of full scale on all ranges from 50 Hz to 50 KHz

Input Impedance:

10 mv to 1V, 10 megohms shunted by 31 pf

3V to 300V, 10 megohms shunted by 20 pf

Size (HWD):

5 3/4" x 9 1/4" x 6 7/8"

Weight:

5 lbs. (with batteries)

4.5 lbs. (less batteries)

8.5 lbs. (shipping weight)

Price:

\$99.95

HEATH MODEL IM-17

DC Volts Ranges:

0 to 1, 10, 100, 1000 volts full scale

AC Volts Ranges:

0 to 1.2, 10, 100, 1000 full scale

Ohms Ranges:

R x 1, 100, 10K, 1 meg

Input Impedance:

11 megohms on DC

1 megohm shunted by 100 pf (38 pf on 1000V scale) on AC

Accuracy:

±3% full scale on DC

±4% full scale on AC

Frequency Response:

±1 dB 10 Hz to 1 MHz

Power Requirements:

1.5V



Size (HWD):

4 1/4" x 8 1/2" x 7 1/4"

Weight:

2 1/2 lbs.

Price:

\$19.95 (kit form)

RCA MODEL WV-38A

DC Volts Ranges:

0 to 0.5, 1.5, 5, 15, 50, 150, 500, 1500

AC Volts Ranges (values of sine waves):

0 to 1.5, 5, 15, 50, 150, 500, 1500 (peak-to-peak values of sine waves and complex waves)

0 to 14, 42, 140, 420, 1400, 4200

Accuracy:

±3% of full scale (accuracy of AC ranges based on use of sine-wave signals having less than 1/2 of 1% total harmonic content)

Ohms ranges:

Seven ranges, from 0 to 1000 megohms

Input Impedance:

11 megohms on all DC ranges

Frequency Response:

30 Hz to 3 MHz (checked at 1.5 and 5V AC)

Maximum Input Voltages:

DC voltages with no AC voltages present—1500V

AC voltages with no DC voltages present—1500V



rms for sine waves—1500V
 peak-to-peak for sine waves—4200V
 peak-to-peak for complex waves—
 2000V

Combined AC and DC voltages:
 Sum of DC voltage and AC peak voltage—2000V

Meter Movement:
 50 μ A DC current for full-scale deflection

Size (HWD):
 6 $\frac{7}{8}$ " x 5 $\frac{1}{4}$ " x 3 $\frac{1}{8}$ "

Weight:
 3 $\frac{1}{2}$ lbs.

Price:
 \$52.00 (wired)
 \$38.00 (kit form)

RCA MODEL WV-500A

DC Volts Ranges:
 0 to 0.5, 1.5, 5, 15, 50, 500, 1500

AC Volts Ranges:
 rms—0 to 1.5, 5, 15, 50, 150, 500, 1500
 Peak-to-peak—0 to 14, 42, 140, 420,
 1400, 4200

Ohms Ranges:
 Seven ranges, 0 to 1000 megohms

Accuracy:
 \pm 3% for full scale on both AC and DC

Input Impedance:
 DC—11 megohms (all ranges)
 AC—0.83 megohms shunted by 70 pf
 (1.5, 5, 50, 150V ranges); 1.3 megohms
 shunted by 60 pf (500V range);
 1.5 megohm shunted by 60 pf (1500V
 range)

Frequency Response:
 \pm dB 30 Hz to 3 MHz

Maximum Input Voltages:
 DC voltages with no AC voltage present—1500V



AC voltages with no DC present.
 rms for sine waves—1500V
 peak-to-peak for sine waves—4200 volts
 peak-to-peak for complex waves—
 2000V

Combined AC and DC voltages:
 Sum of DC voltage and AC peak voltage—2000V

Meter Movement:
 50 μ A DC current for full-scale deflection

Power Requirements:
 Ohms—one 1.5V "C" cell battery

Metering Circuit:
 Three 9-volt batteries.

Size (HWD):
 6 $\frac{7}{8}$ " x 5 $\frac{1}{4}$ " x 3 $\frac{1}{8}$ "

Weight:
 3 $\frac{1}{2}$ lbs.

Price:
 \$75.00

SENCORE MODEL FE14

DC Volts Ranges:
 0 to 1, 3, 10, 30, 100, 300 and 1000, full
 scale

Zero center scale— -0.5 to 0.5, -1.5
 to 1.5, -5 to 5, -15 to 15, -50 to
 50, -150 to 150 and -500 to 500



AC Volts Ranges:
 rms—0 to 1, 30, 30, 100, 300 and 1000
 full scale (frequency compensated)
 Peak-to-peak—0 to 2.8, 8.4, 28, 84, 280,
 840 and 2800, full scale (frequency
 compensated)

Input Impedance:
 DC volts—15 megohms shunted by 14
 pf
 AC volts—10 megohms shunted by 29
 pf

AC Rejection:
 30 to 300 times (30 to 50 dB)

Accuracy:
 \pm 3% full scale from 32° F to 122° F
 on DC
 \pm 5% full scale from 32° F to 122° F
 on AC

Frequency Response:
 Flat from 25 Hz to 1 MHz

Size (HWD):
 NA

Weight:
 NA

Price:
 \$69.95

SENCORE MODEL FE149



DC Volts Ranges (AC rejection 30 dB):
 0 to 0.5, 1.5, 5, 50, 150, 500, 1500 full
 scale.

Zero center ranges:
 -0.25 to 0.25, -0.75 to 0.75, -2.5 to
 2.5, -7.5 to 7.5, -25 to 25, -75 to
 75, -250 to 250, -750 to 750

AC Volts Ranges:
 0 to 0.5, 1.5, 5, 15, 50, 500, 1500 full
 scale (frequency compensated)

Input Impedance:
 DC—15 megohms shunted by 45 pf
 AC—15 megohms shunted by 125 pf

Frequency Response:
 Flat; 25 Hz to 1 MHz, 3 dB
 Points; 8 Hz to over 10 MHz

Accuracy:
 DC— \pm 1.5%
 AC— \pm 3%

Size (HWD):
 NA

Weight:
 NA

Price:
 \$149.50

SENCORE MODEL FE16

**DC Volts Ranges (AC rejection 30 to 50
 dB):**
 0 to 1, 3, 10, 30, 100, 300, 1000 full
 scale

Zero center scale ranges— -0.5 to 0.5,
 -1.5 to 1.5, -5 to 5, -15 to 15,
 -50 to 50, -150 to 150, -500 to
 500

AC Volts Ranges:
 rms—0 to 1, 3, 10, 30, 100, 300, 1000
 full scale

Peak-to-peak—0 to 2.8, 8.4, 28, 84, 280,
 840, 2800 full scale, frequency com-
 pensated



Frequency Response:

25 Hz to 1 MHz, 3 dB points: 10 Hz to 10 MHz flat

Ohms Ranges:

0 to 1000 ohms, 10K, 100K, 10 meg-ohms, 1000 megohms

DC Current Ranges:

0 to 100 ua, 1 ma, 10 ma, 100 ma, 1 amp
Internal voltage drop: 200 mv

Input Impedance:

DC volts—15 megohms shunted by 14 pf at jack or 37 pf through cable
AC volts—10 megohms shunted by 29 pf at jack or 118 pf through cable

Accuracy:

DC volts— $\pm 1.5\%$
AC volts— $\pm 3\%$
Ohmmeter— $\pm 2^\circ$ arc
DC current— $\pm 3\%$ full scale

Size (HWD):

$7\frac{3}{16}'' \times 5'' \times 3\frac{1}{16}''$

Weight:

3 $\frac{1}{4}$ lbs. (less batteries)

Price:

\$84.50

SIMPSON MODEL 313**DC Volts Ranges:**

0 to 0.3, 1, 3, 10, 30, 100, 300, 1000 volts

AC Volts Ranges:

0 to 0.3, 1, 3, 10, 30, 100, 300, 1000 volts

**DC Current Ranges:**

0 to 0.1, 1, 10, 30, 100, 300, 1000 ma

Resistance Ranges:

Rx1 (10 ohm center), Rx10, Rx100, Rx1K, Rx10K, Rx100K, Rx1 meg

Input Impedance:

DC volts—11 megohms
AC volts—10 megohms

Frequency Response:

± 0.5 dB from 20 Hz to 100 KHz on 0 to 0.3, 1, 3 volts ranges
 ± 0.5 dB from 20 Hz to 20 KHz on 0 to 10, 30, 100 volt ranges

Accuracy:

$\pm 3\%$ of full scale on DC
 $\pm 3\%$ of full scale on AC
 $\pm 3^\circ$ of arc on ohms

Size (HWD):

NA

Weight:

NA

Price:

\$100.000

TRIPLETT MODEL 600 TYPE 1**DC Volts Ranges:**

0 to 0.4, 0.8, 1.6, 4, 8, 16, 40, 160, 400, 1600

AC Volts Ranges:

0 to 4, 8, 16, 40, 160, 400, 800

Ohms Ranges:

0 to 1K, 10K, 100K, 1 meg, 100 megohm with 10 center

Input Impedance:

DC—2.75 megohms at 0.4V, 5.5 megohms at 0.9V, 11 megohms remainder of scales

AC—175 megohms minimum

Accuracy:

$\pm 3\%$ on DC
 $\pm 3\%$ on AC

Power Requirements:

One size D cell, two size AA cells, one 9-volt #216 cell

Size (HWD):

$6\frac{1}{2}'' \times 5\frac{1}{2}'' \times 3\frac{1}{2}''$

Weight:

2 $\frac{1}{2}$ lbs.

Price:

\$78.00

TRIPLETT MODEL 601**DC Volts Ranges:**

0 to 0.1, 0.3, 1, 3, 10, 30, 100, 300, 1000 @ 11 megohms

AC Volts Ranges:

0 to 0.01, 0.03, 0.1, 0.3, 1, 3, 10, 30, 100, 300, 100 @ 11 megohms

Ohms Ranges:

0 to 1000, 10K, 100K, 1 meg, 10 meg, 100 meg, 1000 meg (standard 1.5V, 5.5)

0 to 1000, 10K, 100K, 1 meg, 10 meg, 100 meg, 1000 meg (low power 0.1 mw, 75 mv)

Center scale value 10 ohms on x1 range

DC Current Ranges:

0 to 10, 100, 1000, 10,000 ma at 100 mv

AC Current Ranges:

0 to 10, 100, 1000, 10,000 ma at 100 mv

dB Ranges:

-40 dB to +50 dB in 10 dB steps

Meter Size and Type:

4 $\frac{1}{2}''$ suspension meter movement

Sensitivity:

10 mv on AC

Accuracy:

$\pm 2\%$ of full scale on DC
 $\pm 3\%$ of full scale on AC

Input Impedance:

11 megohms on all ranges

Frequency Response:

50 Hz to 50 KHz

Power Requirements:

Battery—10 1 $\frac{1}{2}$ -volt "AA" cells, NEDA #15

Size (HWD):

NA

Weight:

NA

Price:

\$150.00

**Field-strength meters****AMPHENOL MODEL 840-13****Bands:**

VHF and FM (UHF plug-in optional)

Input Impedance:

300 or 75 ohms



Power Requirements:

Battery

Size (HWD):

8¾" x 4" x 4½"

Weight:

3½ lbs.

Price:

\$232.85

\$54.95 (UHF plug-in)

CHANNEL MASTER MODEL 7275

Bands:

UHF, VHF and FM

Input Impedance:

75 ohms

Power Requirements:

Battery

Size (HWD):

NA

Weight:

7½ lbs.

Price:

NA

THE FINNEY CO. MODEL M-550

Bands:

VHF and FM

Input Impedance:

300 or 75 ohms

Power Requirements:

AC or battery

Size (HWD):

NA

Weight:

7 lbs., 10 oz.

Price:

\$435.00

JERROLD MODEL AIM-718



Bands:

UHF, VHF and FM

Input Impedance:

300 ohms

Power Requirements:

Battery

Size (HWD):

4" x 6½" x 9"

Weight:

5½ lbs.

Price:

\$330.83


JERROLD MODEL 727

Bands:

VHF and FM (UHF plug-in optional)

Input Impedance:

75 ohms

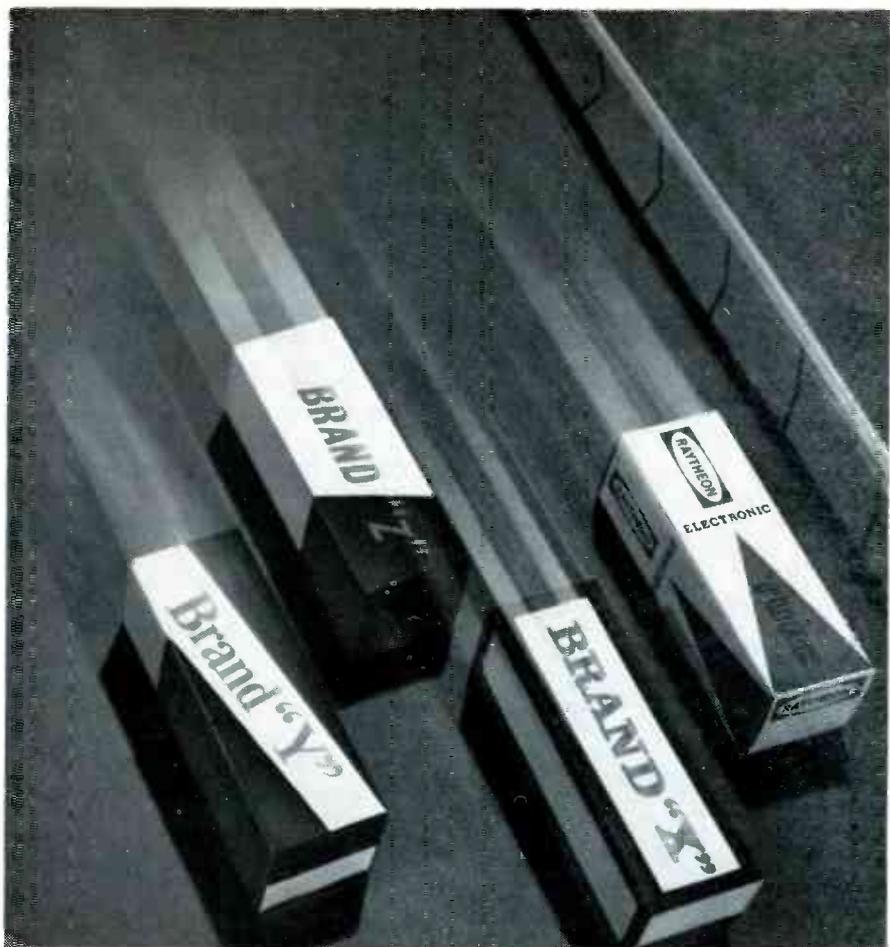

Who'll be first?

It could be us. We're getting there ...working our way up...*because we put quality first.* We're already the leading independent tube manufacturer serving independent servicemen.

You see, ever since Raytheon produced the first receiving tube, we've made tubes to just one specification: our own highest quality standards. Every tube must pass rigorous electrical and mechanical checks before we sell it to you.

That's why you rarely—if ever—get a call-back because of Raytheon receiving tubes. It's also why we've sold more than 500 million tubes. And why Raytheon is universally regarded as the No. 1 supplier of *reliable* receiving tubes.

Who knows? If we keep on put-

ting quality first, we could become the largest supplier! Especially if you keep on backing us by asking for "Raytheon quality" receiving tubes.

Why not? You earn greater customer satisfaction...make more profit per tube. Ask your distributor about the current Raytheon promotion.

Raytheon Company, Receiving Tube Operation, Fourth Avenue, Burlington, Massachusetts 01803.



Remember to ask "WHAT ELSE NEEDS FIXING?"

Circle 27 on literature card

Power Requirements:

Battery

Size (HWD):

8" x 13 1/4" x 8 1/4"

Weight:

15 lbs.

Price:

\$595.00

SENCORE MODEL FS-134

Bands:

UHF, VHF and FM

Input Impedance:

300 or 75 ohms

Power Requirements:

Battery

Size (HWD):

10" x 9" x 5"

Weight:

9 lbs.

Price:

\$199.50



Marker generators

HEATH MODEL IG-14

Output Frequencies:

100 KHz (beat marker)
3.08, 3.58, 4.08 MHz (color bandpass)
4.5 MHz (sound IF)
10.7 MHz (FM IF)
39.75, 41.25, 42.17, 42.50, 42.75, 45.00,
45.75, 47.25 MHz (TV IF)
67.25 MHz (channel 4)
193.25 MHz (channel 10)

Modulation:

400 Hz

Input Impedance:

Sweep sample, 75 ohms, external
marker, 75 ohms

Demodulated input, 220K ohms

Output Impedance:

RF output, 75 ohms
Scope, 22K ohms



Bias Supply:

0 to 15V DC, 10 ma

Size (HWD):

5 1/2" x 13 1/2" x 11"

Weight:

8 lbs.

Price:

\$99.95 (kit form)

**RCA MODEL WR-99A
Crystal Calibrated**

Output Frequencies:

VFO tuning ranges—19 MHz to 28 MHz,
27 MHz to 40 MHz, 39 MHz to 60
MHz, 50 MHz to 90 MHz, 75 MHz to
140 MHz, 140 MHz to 180 MHz, 170
MHz to 220 MHz, 200 MHz to 260
MHz.

Crystal controlled—1 MHz, 4.5 MHz and
10 MHz

Modulation:

Internal—1 MHz, 10 MHz, 4.5 MHz, 4.5
MHz and 600 Hz, and 600 Hz

External source—up to 10 MHz

Plug-in fundamental crystal—1 MHz to
30 MHz

Plug-in LC circuit—100 KHz to 10 MHz

Output Voltage Level:

VFO range—at least 0.1 volt rms

Output Impedance:

90 ohms

Size (HWD):

13 1/2" x 10" x 7"

Weight:

17 lbs.

Price:

\$256.50



Oscilloscopes

B&K MODEL 1450

Vertical Amplifier:

Sensitivity—25 mv/inch (70 mv p-p/
inch)

Undistorted Deflection—greater than 6
inches

Positioning—±2 inches minimum

Frequency Response—5 Hz-4.5 MHz
(±1.0 dB), -3 dB at 5.5 MHz

Rise Time—120 nanoseconds maximum

Input Impedance—3 megohm shunted
by 47 pf

Vertical Attenuator—7 step, frequency
compensated

Horizontal Amplifier:

Sensitivity—0.5 volts rms/inch (or
better)

Positioning—any portion of trace can
be placed on screen

Frequency Response—2 Hz to 750 KHz,
±3 dB

Input Impedance—5 megohms minimum
shunted by 30 pf

Sweep:

Frequency Range—5 Hz to 500 KHz,
sawtooth

Special Sweep—Line phaseable, TV-V
and TV-H

Synchronization—Automatic, Interval +
and —, line and external



Intermittent Analyzer:

Sensitivity—adjustable, triggers on
±10% to ±50% changes in signal
level.

Output—110V AC, 100 watt latched
"on" after triggering change occurs

Frequency Response—20 Hz to greater
than 5 MHz

Added Feature:

Intermittent analyzer indicates inter-
mittent conditions (optional inter-
mittent monitor available for \$24.95)

Size (HWD):

13 3/8" x 8 3/4" x 17 1/4"

Weight:

NA

Price:

\$279.95

DATA INSTRUMENTS MODEL 555

Vertical Amplifier:

Sensitivity—0.02 v/cm (10 v/cm in a 1-
2-5 sequence)

Accuracy—±3%

Frequency response—7 MHz ±3 dB

DC (2 Hz-7 MHz when AC connected)

Rise time—50 nanoseconds

Input Impedance—1 megohm shunted
by 33 pf

Horizontal Amplifier:

Sensitivity—0.2 v/cm (10 v/cm, contin-
uously adjustable)

Accuracy—±5%

Sweep rate—1 us/cm (1 sec/cm in a
1-2-5 sequence with 5X expander)

Response—2 Hz to 200 KHz ±3 dB

Input Impedance—1 megohm shunted
by 40 pf



Trigger:
Internal—20 Hz (7 MHz with 1 cm deflection)
External—20 Hz-7 MHz, 1V p-p

Calibrator:
Waveshape—1-KHz square wave
Amplitude—5, 0.5, 0.05V p-p
Accuracy—±3%

Power Requirements:
117V AC, 40 watts

Size (HWD):
11½" x 8" x 17½"

Weight:
24 lbs.

Price:
\$284.00

EICO MODEL 435

Vertical Amplifier:
Frequency Response—from DC to 4.5 MHz, +1 to 3 dB (useful to 10 MHz)
Sensitivity—18 mv rms/cm (50 mv peak to peak/cm)
Input Impedance—1 megohm, 35 pf

Horizontal Amplifier:
Frequency Response—from 1 Hz to 500 KHz, 1 to 3 dB
Sensitivity—0.7V rms/cm
Input Impedance—4 megohms, 40 pf

Sweep Ranges:
10 to 100 Hz, 100 to 1 KHz, 1K to 10 KHz, 10K to 100 KHz



TV-vertical (30 Hz), TV-horizontal (7875 Hz)

Synchronization:

(+), (—), internal, external or line frequency

Power Requirements:

117V AC, 110 watts (approx.)

Size (HWD):

8½" x 5¾" x 12½"

Weight:

18 lbs.

Price:

\$169.50 (wired)

\$119.95 (kit form)

HEATHKIT MODEL 10-14

Vertical Amplifier:

Sensitivity—0.05 v/cm

Frequency Response—DC to 5 MHz (1 dB); DC to 8 MHz (3 dB)

Input Impedance—1 megohm shunted by 15 pf

Attenuator—9-position compensated, calibrated in 1-2-5 sequence. Continuously variable uncalibrated control between steps. Accuracy ±3%

Maximum Input—600 volts p-p. 120 volts p-p provides full-scale deflection on highest scale.

Horizontal Amplifier:

Sensitivity—Triggered 18 steps in 1-2-5 sequence from 0.5 sec/cm to 1 ms/cm. Continuously variable uncalibrated control on each step.

Accuracy—±3%

Magnifier—X5, accuracy is ±5% when magnifier is on

Trigger:

Capability—+ or — slope, AC or DC coupling, variable slope control. "Auto" position provides triggering at about 50 Hz. Internal, external or line input.

Requirements—Internal: ½ to 6 cm display; External: 0.5 volts to 120V p-p

Added Features:

CRT—5ADP2 or 5ADP31 (interchangeable with any 5AD or 5AB series tube)

Magnetic shield

Power supply—fully regulated over range of 105-125V AC or 210-250V AC line voltage

Z-axis input—access for direct coupling to vertical plates

Power Requirements:

115 or 230V AC, 50/60 Hz

Size (HWD):

15" x 10½" x 22"

Weight:

40 lbs.

Price:

\$259.00 (kit form)

\$399.00 (wired)

SCORRE MODEL PS127

Vertical Amplifier:

Sensitivity—0.017 volts rms/inch

Frequency response—10 Hz to 4.5

MHz ± dB, —3 dB at 6.2 MHz

Rise time—0.055 usec



Input Impedance—2.7 megohms shunted by 99 pf (27 megohms shunted by 9 pf when using built-in low-capacitance probe)

Horizontal Amplifier:

Sensitivity—0.6 volts rms/inch

Frequency Response—10 Hz to 650 KHz ±3 dB

Sweep:

Range—5 Hz to 500 KHz in 5 steps

Synchronization:

Internal, 60 Hz and external

Screen Size:

5"

Size (HWD):

12" x 9" x 15½"

Weight:

25 lbs.

Price:

\$199.50 (demodulator probe \$5.75)

CRT Rebuilder



Rebuild your own CRT's. Average cost B/W \$1.50—Color \$8.50. Easy to operate. Requires only 4x8 feet of space.

Supplies for your first 50 picture tubes free!

Color — black and white. Rebuilt while you are here. See the results for yourself.

Terms Available

ASSOCIATED INDUSTRIES—Div. of
Lakeside Industries
5234 N. Clark St.
Chicago, Ill. 60640
Phone: 312-271-3399

Free demonstration appointment
 Send me more information

Name
Address
City State

Circle 28 on literature card

SENCORE MODEL PS148

Oscilloscope/Vectorscope

Vertical Amplifier:

Voltage measurements—peak-to-peak voltages are read directly

Frequency response—10 Hz to 5.2 MHz, ± 1 dB

Rise time—0.055 microseconds

Sensitivity—0.17V rms per inch vertical deflection

Input Impedance—27 megohms shunted by 9 pf (Lo-Cap probe), 2.7 megohms shunted by 99 pf (Direct probe)



Horizontal Amplifier:

Frequency Response—3 dB from 10 Hz to 650 KHz

Sweep:

5 Hz to 500 KHz in 5 overlapping ranges
TV-horizontal and TV-vertical ranges are preset on coarse control

Standby Switch:

Cuts instrument to half power when not in use and provides "instant on" when required

Size (HWD):

NA

Weight:

NA

Price:

\$219.50

TELEQUIPMENT MODEL 554

Vertical Amplifier:

Bandwidth (3 dB down)—DC to 10 MHz at normal gain; DC to 4 MHz at 10X Y gain

Rise time—35 nanoseconds at normal gain; 90 nanoseconds at 10X Y gain

Sensitivity—100 mv/cm in a 1-2-5 sequence (continuously variable between steps. 10X gain switch produces 10 mv/cm maximum sensitivity)

Input impedance—1 megohm shunted by 47 pf.



Accuracy— $\pm 5\%$

Horizontal Amplifier:

Sweep rate—200 nanoseconds/cm to 2 sec/cm in a 1-2-5 sequence (continuously variable to 5 s/cm. Expandable to 40 ns/cm)

Sensitivity—0.6 v/cm to 3 v/cm

Frequency response—DC to 750 KHz

Input Impedance—1 megohm shunted by 30 pf

Trigger:

Automatic—50 Hz to 1 MHz

Level—Any point on the input waveform, 10 Hz to 3 MHz

HF sync—synchronized sweep 1 MHz to 25 MHz

TV—triggers on TV frame or line

Internal—2 mm deflection

External—1.5-400V p-p

Calibrator:

Line frequency, 0.5V p-p $\pm 2\%$

Sawtooth—1 to 35V p-p, 30K ohms load

Probe test—5V p-p

Size (HWD):

9 1/4" x 6 3/4" x 16 1/4"

Weight:

17 lbs.

Power Requirements:

100-125V, 200-250V; 48-440 Hz

Price:

\$350.00

RF signal generators

(sweep type included)

EICO MODEL 369 SWEEP GENERATOR



Sweep Output:

3 MHz to 220 MHz, 6:1 vernier for frequency adjustment

Sweep Width:

Continuously variable to 20 MHz, depending on range selected

Marker Frequencies:

2 MHz to 225 MHz (to 75 MHz on fundamental frequencies), 6:1 vernier for frequency adjustment

Output Impedance:

50 ohms

Added Features:

Retrace blanking

AGC (3 stage)

Size (HWD):

12 1/2" x 8 1/2" x 7"

Weight:

16 lbs.

Price:

\$149.95 (wired)

\$99.95 (kit form)

HICKOK MODEL 288 AX

Crystal-Controlled Signal Generator

Sweep Outputs:

AM—35 KHz to 110 MHz in 8 bands

FM—35 KHz to 10 MHz in 8 bands (0-30 KHz sweep)

1 MHz to 160 MHz (0 to 150 KHz and 0 to 450 KHz sweep)

1 MHz, fixed (0 to 30 KHz sweep)



Crystal Outputs:

100 KHz or 1000 KHz unmodulated or modulated at 400 Hz

100 KHz output provides useful harmonics to 15 MHz

1000 KHz output provides useful harmonics to 125 MHz

Modulation:

External or internal modulation on both AM and FM ranges. Internal FM

sweep width continuously variable to 450 KHz. Choice of 60 Hz or 400 Hz sweep rate. Sweep synchronizing

voltage available on front panel.

Audio Output:

20 Hz to 15,000 Hz variable; or 400 Hz, fixed

dB Meter Ranges:

-10 dB to 6 dB, 6 dB to 22 dB, 22 dB to 38 dB

Size (HWD):

16" x 13" x 7"

Weight:

33 lbs.

Price:

\$385.00

RCA MODEL WR-50B (K) RF Signal Generator

Sweep outputs:

455 KHz center frequency

10.7 MHz center frequency

Sweep Width:

Approximately 10% of center frequency

Variable Oscillator Outputs:

85 KHz to 40 MHz in 6 bands

RF Output Level:

0.05 volt rms on all ranges



Modulation:
Internal—400 Hz, FM (percentage variable to 30%)
External—maximum 15 KHz
Dial Calibration Accuracy:
±2%
Size (HWD):
7¾" x 5¾" x 4¾"
Weight:
5 lbs.
Price:
\$65.00

**RCA MODEL WR-69A
TV/FM Sweep Generator**



Sweep Outputs:
TV channels 2 through 13—54 to 216 MHz
FM band—88 to 108 MHz
IF/video—50 KHz to 50 MHz
Sweep Width (all continuously variable):
TV channels—at least 12 MHz
FM—at least 20 MHz
IF/video—at least 20 MHz
Output Voltage Levels (rms):
TV channels—at least 0.1 volt
FM—at least 0.1 volt
IF/video—at least 0.1 volt
Output Cable Terminations:
RF—300 ohms balanced to ground
IF/video—100 ohms
Size (HWD):
13½" x 10" x 7"
Weight:
16 lbs.
Price:
\$295.00

BEST SELLING SAMS BOOKS FOR THE SERVICE TECHNICIAN

Color-TV Servicing Guide

Shows how to apply fast troubleshooting procedures, based on analysis of trouble symptoms. Includes many full-color picture tube photos showing various operating troubles; clearly explains how to diagnose trouble causes; gives proper repair procedures.
Order 20358, only.....\$4.25

Color-TV Servicing Made Easy

Full explanation of color principles, circuitry, setup adjustments, and servicing of all color-TV sets. Takes the mystery out of servicing all types of color-TV receivers.

Vol. 1. Full data on all major color-TV receivers from 1957-1964. Order 20135, only.....\$3.95

Vol. 2. Brings you up-to-date on new circuitry and models. Order 20523, only.....\$4.95

Color-TV Training Manual. 2nd Ed.

Ideal guide for technicians preparing to service color-TV. Includes detailed explanation of color principles, circuits, setup procedures, alignment, and troubleshooting; full-color picture-tube illustrations. Order 20472, only.....\$6.95

Color-TV Trouble Clues

Field-tested guide describing types of troubles likely to be encountered, troubleshooting procedures, and proper use of test equipment to speed color-TV servicing.

Vol. 1. Covers color-TV receivers of all makes. Order 20120, only.....\$2.50

Vol. 2. Color-TV servicing know-how on latest models. Order 20121, only.....\$2.95

TV Servicing Guide

Tells you how to apply proper troubleshooting procedures based on analysis of symptoms, illustrated by picture tube photos. Packed with servicing hints and short cuts.
Order 20361, only.....\$3.25

TV Servicing Made Easy

Shows how to solve the tougher types of troubles. Based on actual bench experience; explains how to diagnose and repair troubles most likely to be encountered in every type of circuit.
Order 20365, only.....\$3.95

Practical Transistor Servicing. 2nd Ed.

Provides fastest, most direct methods for troubleshooting all types of transistorized equipment, including FM and auto radios.
Order 20314, only.....\$4.25

NEW 12TH EDITION OF THE FAMOUS

TUBE SUBSTITUTION HANDBOOK

Lists over 12,000 direct substitutions. A complete guide to substitutions for receiving, picture tube, miniature, industrial, and communications types; includes foreign tubes. Tells how and when to make proper substitutions.

Order 20701, Twin-Pak (regular size for bench use; pocket-size for caddy) both for only..\$2.25

Order 20700, shop edition, only.....\$1.75

Television Service Training Manual. 2nd Ed.

Updated and expanded to include new TV servicing short cuts and tests. Shows how to use test points to isolate trouble to specific components, in both tube and transistor receivers. Treats all sections of the TV receiver; packed with schematics, charts, and drawings. Provides you with quick, sure-fire analysis and repair procedures. Order 20628, only.....\$4.95

Photofact® Television Course. 3rd Ed.

Updated edition of this famous course which is a complete study of black-and-white TV theory and circuitry; includes transistor circuits. An effective and comprehensive self-study course.
Order 20595, only.....\$4.95

Photofact® Guide to TV Troubles. 2nd Ed.

Over 200 photos of actual TV picture defects are keyed to specific faulty components in typical circuits, so you can locate the trouble source in minutes. Order 20521, only.....\$4.50

Bench Servicing Made Easy. 2nd Ed.

Provides a step-by-step guide to the location of defective components in any TV circuit; information comes directly from workbench experience. Order 20658, only.....\$3.95

Transistor Color-TV Servicing Guide

Shows you how to apply correct troubleshooting procedures based on analysis of trouble symptoms. Includes many photos, circuit diagrams, charts, and tube and waveform photographs.
Order 20693, only.....\$4.50

AM-FM-TV Alignment

Here is all you need to know about alignment of all radio and tv sets. Includes chapter on audio amplifier frequency-response checks.
Order 20602, only.....\$3.95

OUTSTANDING BOOKS ON TEST EQUIPMENT

Know Your Oscilloscope. 2nd Ed.

Describes latest use of scopes for servicing and observing circuit action. Includes new data on transistorized scope circuitry, triggered-sweep, and dual-trace scopes. Order 20549, only..\$3.50

Know Your Tube and Transistor Testers

Explains principles and circuits used in typical testers; provides troubleshooting data for repair of various makes of instruments.
Order 20630, only.....\$3.50

Using Scopes in Transistor Circuits

Tells when and how to use oscilloscopes to analyze and/or troubleshoot transistor circuits of all types. Order 20662, only.....\$4.50

Know Your Color-TV Test Equipment

Explains clearly and easily the function and circuit action of each color-TV test instrument. Gives setup information, service and calibration data. Order 20256, only.....\$3.50

Troubleshooting with the Oscilloscope.

Shows practical use of the scope to isolate circuit troubles. Tells how to setup for tests, how to use probes, how to interpret waveforms, how to troubleshoot. Order 20550, only.....\$4.50

Understanding Electronic Test Equipment. 2nd Ed.

Fully explains operating principles, functions, and applications of instruments most commonly used in troubleshooting and testing. Includes solid-state equipment. Order 20613, only..\$4.25

Know Your Signal Generators

Order 20255, only.....\$3.25

Know Your Sweep Generators

Order 20593, only.....\$3.50

Know Your Color-TV Test Equipment

Order 20256, only.....\$3.50

Troubleshooting with the VOM/VTVM

Order 20481, only.....\$3.95

HOWARD W. SAMS & CO., INC.

Order from any Electronic Parts Distributor, or mail to Howard W. Sams & Co., Inc., Dept. PF-3 4300 W. 62nd St., Indianapolis, Ind. 46268

Send books checked at right. \$_____ enclosed.

Send FREE 1969 Sams Book Catalog

Name _____
PLEASE PRINT

Address _____

City _____

State _____

Zip _____

<input type="checkbox"/> 20358	<input type="checkbox"/> 20701	<input type="checkbox"/> 20630
<input type="checkbox"/> 20135	<input type="checkbox"/> 20700	<input type="checkbox"/> 20550
<input type="checkbox"/> 20523	<input type="checkbox"/> 20628	<input type="checkbox"/> 20613
<input type="checkbox"/> 20472	<input type="checkbox"/> 20521	<input type="checkbox"/> 20662
<input type="checkbox"/> 20120	<input type="checkbox"/> 20595	<input type="checkbox"/> 20256
<input type="checkbox"/> 20121	<input type="checkbox"/> 20658	<input type="checkbox"/> 20255
<input type="checkbox"/> 20361	<input type="checkbox"/> 20693	<input type="checkbox"/> 20593
<input type="checkbox"/> 20365	<input type="checkbox"/> 20602	<input type="checkbox"/> 20256
<input type="checkbox"/> 20314	<input type="checkbox"/> 20549	<input type="checkbox"/> 20481

Circle 29 on literature card

**SENCORE MODEL SM152
Sweep and Marker Generator**



Sweep Output:

10 MHz to 920 MHz (VHF fundamental frequencies), dial calibrated in MHz and TV channel numbers.

Sweep Width:

0.3 MHz to 15 MHz, calibrated

Marker Frequencies:

IF and RF—39.75 MHz, 41.25 MHz, 41.67 MHz, 42.17 MHz, 42.67 MHz, 44.25 MHz, 45.75 MHz, 47.25 MHz, 4.5 MHz, 4.08 MHz, 3.58 MHz and 3.08 MHz (all preset and selected by pushbutton)

FM crystal-control markers—10.7 MHz, 10.6 MHz and 10.8 MHz generated simultaneously for observation of FM center frequency, plus 100 KHz markers on each side of center frequency for "S" curve FM alignment. Variable marker—special generator marker for IF spot alignment of older TV chassis, variable from 39 MHz to 48 MHz

Size (HWD):

NA

Weight:

NA

Price:

\$349.50

**Semiconductor
testers**

**AMPHENOL MODEL 830
Transistor Commander**

Tests Performed:

Good/bad test in- or out-of-circuit



In-circuit test of diodes for "opens" and "shorts"
Out-of-circuit tests for both high- and low-power transistors for DC beta and ICBO leakage
Zener, silicon and germanium diodes checked out-of-circuit for forward and reverse current

Features:

Components under test protected against damage by tester
A 0-100 volt DC voltmeter combined with transistor/diode tester

Size (HWD):

NA

Weight:

NA

Price:

\$79.95

B&K MODEL 161

Tests Performed:

AC beta—in- and out-of-circuit, (two ranges—2 to 100 and 10 to 500)
Leakage (ICBO)—0 to 5000 ua
Diode checks (out-of-circuit, front-to-back ratio)



Features:

Components under test protected against damage
Polarity switch
7" mirrored meter

Size (HWD):

7 1/8" x 7 1/4" x 3 5/8"

Weight:

6 lbs.

Price:

\$89.95

EICO MODEL 443

Semi-Conductor Curve Tracer

Tests Performed:

Tests characteristics of diodes—forward voltage (V), forward current (I), reverse current (IR), peak inverse voltage (PIV) variable from 0 to 1400 volts

Low- and high-power transistor checks—hfe, hfo, ICEO, VCESat and BVCEO

Size (HWD):

NA

Weight:

NA



Price:

\$99.95 (wired)

\$69.95 (kit form)

**EICO MODEL 680
Transistor and Circuit Tester**



Tests Performed:

Checks low- and high-power transistor for DC beta
Checks ICBO and ICEO checks

Features:

VOM facilities including five DC current ranges down to 50 ma full scale
Two DC volts ranges and three resistance ranges

Size (HWD):

NA

Weight:

NA

Price:

\$49.95 (wired)

\$34.95 (kit form)

JACKSON MODEL 810

Tests Performed:

Beta—(two ranges: 2 to 100 and 10 to 500) in- or out-of-circuit, signal or power

Leakage—0 to 5000 ua

Diodes—open or short in-circuit. Forward and reverse current out-of-circuit



Signal Generator Output:
8.5V p-p semi-square wave
Power Requirement:
117V AC
Size (HWD):
7½" x 7½" x 4⅝"
Weight:
4½ lbs.
Price:
\$89.95

LECTROTECH MODEL TT-250

Tests Performed:

Good/bad test in- or out-of-circuit
Out-of-circuit beta (two scales: 0 to 250 and 0 to 500)
Leakage (ICBO)—measured directly in μ a
Diode front-to-back ratio
Electrolytic capacitor leakage current (test voltage: 6 volts)



Transistor type (PNP or NPN)
Features:
Components under test protected against damage by tester
6" meter
Separate power transistor socket
Size (HWD):
7" x 10" x 4½"
Weight:
5½ lbs.
Price:
\$87.50

RCA MODEL WC-506A

Tests Performed:

Checks grain and leakage levels of out-of-circuit transistors
Checks either NPN or PNP transistors
Checks low- or high-power transistors
Checks relative front-to-back current ratios of diodes

Features:

Transistor socket and test leads are provided
Special spring terminals for connecting diodes

Size (HWD):
6¼" x 3¾" x 2"
Weight:
14 oz.
Price:
\$18.00



RCA MODEL WT-501A


Tests Performed:

In- or out-of-circuit DC beta (1 to 1000)
High- and low-power transistors in- or out-of-circuit
Collector to emitter leakage (ICBO), collector to emitter leakage (ICEO)
Relative front-to-back ratio of diodes at appropriate current levels

Features:

Battery operated, completely portable
Variable collector current allowing many transistors to be checked at their rated current level
Complete DC forward current transfer ratio curve can be plotted up to 1 amp

THE BEST COLOR ANTENNAS FOR ALL AREAS!

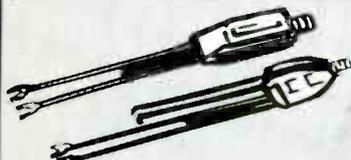

Universal 75-300 ohm Matching Transformers for every home, master antenna, and CCTV installation need!



"Secure-Lock" Gold Masts. Heavy gauge steel. With swaged end and "Secure-Lock." Economical "Lock-Seam" masts also available!




UHF Converters. New CR-800 has 30db Gain! Solid-state with powerful amplifier and Local/Distant Switch for all areas! Complete range of economical and performance proven models!

Indoor Antennas...top of the set, behind the set, and replacement rods.

ONLY RMS ANTENNAS FEATURE REYNOLDS ALUMINUM COLORWELD® THE MOST DURABLE GOLD FINISH!


**UHF
VHF
FM**

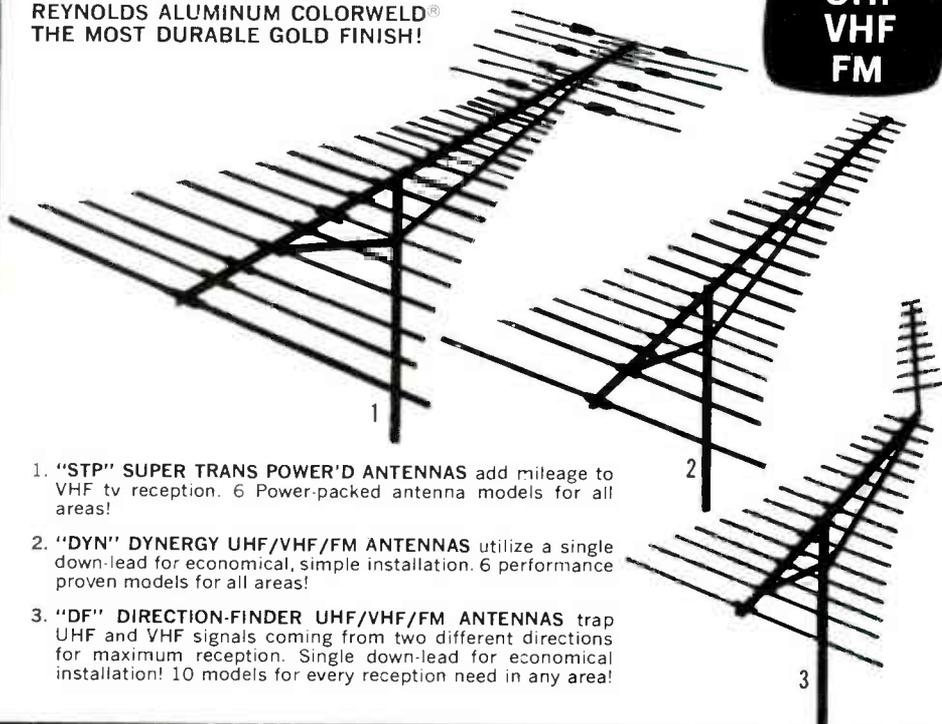

1. "STP" SUPER TRANS POWER'D ANTENNAS add mileage to VHF tv reception. 6 Power-packed antenna models for all areas!
2. "DYN" DYNERGY UHF/VHF/FM ANTENNAS utilize a single down-lead for economical, simple installation. 6 performance proven models for all areas!
3. "DF" DIRECTION-FINDER UHF/VHF/FM ANTENNAS trap UHF and VHF signals coming from two different directions for maximum reception. Single down-lead for economical installation! 10 models for every reception need in any area!

RMS ELECTRONICS, INC. Write for complete Catalog. 50 ANTIN PLACE, BRONX, N. Y. 10462

Circle 30 on literature card

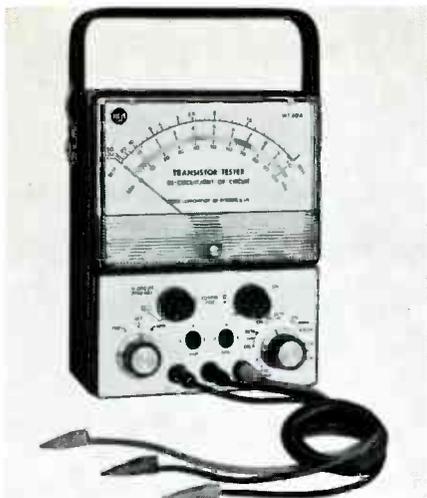

Zero control to cancel the effects of leakage on beta reading

Size (HWD):

6 $\frac{7}{8}$ " x 5 $\frac{1}{4}$ " x 3 $\frac{1}{8}$ "


Weight:

NA

Price:

\$66.75

SECO MODEL 260

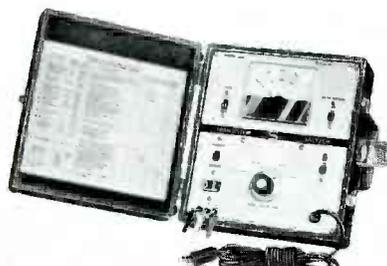

Tests Performed:

Quality on a relative scale
 In-circuit dynamic (AC) beta
 Out-of-circuit beta (two ranges: 0 to 200 and 0 to 1000)
 Out-of-circuit leakage (ICEO and ICBO)
 Transistor type (NPN and PNP)

Size (HWD):

4 $\frac{1}{4}$ " x 7 $\frac{3}{8}$ " x 8 $\frac{3}{4}$ "

Weight:

4 $\frac{1}{4}$ lbs.

Price:

\$69.50

SENCORE MODEL TF151



TRIPLETT MODEL 3490-A

Lab-Type Transistor Tester

Tests Performed:

Transistors—most large- and small-signal and power types; also tetrode, diodes, rectifiers (germanium, silicon and selenium), and SCR's
 Collector-junction leakage current—ICO, ICBO, ICSS, ICER, ICBR; alpha (hfb); DC beta (hfe); AC beta (hfe); VCESat; RSTA; reach thru (punch-through)

Tests Performed:

Transistors in- or out-of-circuit for AC beta and out of circuit tests for ICBO leakage
 Gm mutual conductance tests for field effect transistors (FET's) in- or out-of-circuit
 IGSS leakage tests for FET's out of circuit

Features:

Increased current checks for high power transistors
 Special checks provided for critical RF transistors
 Special Gate 2 checks provided for FET's with two gates

Size (HWD):

9 $\frac{1}{2}$ " x 7 $\frac{1}{2}$ " x 6"

Weight:

9 lbs.

Price:

\$129.50

SENCORE MODEL TR139

Tests Performed:

AC beta checks in- and out-of-circuit for low- and high-power transistors
 ICBO leakage on high and low power transistors
 Diodes in- and out-of-circuit with "go" or "no go" indicator

Features:

Automatic circuit impedance compensation for in-circuit tests

Size (HWD):

9" x 7 $\frac{1}{2}$ " x 6"

Weight:

8 lbs.

Price:

\$89.50



Solid-state equipment analysts

B&K MODEL 970

Functions:

DC Power Supply:
 Adjustable in 1.5-volt steps from 1.5V DC to 15V DC with 5 amps available at each setting, ripple does not exceed 5% fuse protection, bias control permits 0 to 100% adjustment of DC voltage between 1.5-volt settings.

VOM:

Sensitivity—5.5K ohms per volt
 DC voltage ranges—2V, 20V, 200V, 500V
 Voltage accuracy—within 5% of full scale
 DC current ranges—20 ma, 200 ma, 2 amps, 5 amps
 Current accuracy—within 7% of full scale
 Resistance ranges—x1, x10, x100
 Resistance accuracy—within 20% of midscale
 (Patch cord supplied for measuring current drawn from DC power supply)



Rectifier and diode—forward voltage drop, forward leakage current, reverse leakage current

SCR—reverse leakage (IR), forward leakage (IS), gate-firing current (Igf)

Features:

Full-scale collector-current ranges—0 ma to 30 amps in 11 overlapping ranges

Full-scale collector-voltage ranges—0 to 120 volts DC in 7 overlapping ranges

Indicator lights—power on, input on, collector on, reduce power

Power Sources:

105-125V AC, 60 Hz, approximately 200 watts, maximum

Size (HWD):

8 $\frac{1}{4}$ " x 18 $\frac{3}{4}$ " x 15 $\frac{1}{2}$ "

Weight:

30 lbs.

Price:

\$441.00

RF and Audio Signal Generation:
 Frequencies—four bands
 Band A—250 KHz to 750 KHz AM modulated
 Band B—750 KHz to 2 MHz AM modulated
 Band C—10 MHz to 11.4 MHz AM or FM modulated
 Band D—88 MHz FM modulated (70 KHz Dev)
 Accuracy—within 2% at 455 KHz, 1600 KHz and all frequencies on band.
 All other frequencies within 5%
 RF Level—minimum output of 0.025 volts rms on Bands A, B and C.
 Minimum of 0.01 volts rms on Band D
 Modulation—400 Hz tone, 30% for AM and 70 KHz deviation for FM
 Audio Output—minimum of 50 mv rms at 400 Hz across a 3-ohm load.
 Minimum of 1.25 volts at 400 Hz across a 72-ohm load

Transistor Tests:

Out of circuit test for DC beta (0-300) and leakage (ICEO)

Power Requirements:

105 to 125V AC, 60 Hz

Size (HWD):

15½" x 8½" x 9"


Weight:

22 lbs.

Price:

\$209.95

PRECISION APPARATUS MODEL V-95

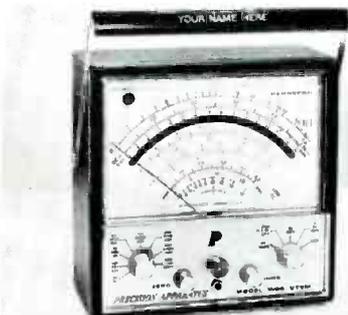

DC Volts Ranges:

0 to 0.5 to 1500 in a 5-15 sequence

Input resistance—11 megohms

Accuracy—±3% full scale

AC Volts Ranges:

rms—0 to 1.5 to 1500 in a 5-15 sequence

Peak to peak—0 to 4 to 4000 in a 4-14 sequence

Accuracy—±5% full scale

Response—±1 dB, 40 Hz-4 MHz

dB scales—-6 to +66 dBm

Ohms Ranges:

0 to 1000 to 1000 meg (10 center)

Power Requirements:

105-125V AC

Size (HWD):

7½" x 8" x 4"

Weight:

6¼ lbs.

Price:

\$79.95

Television analyst

B&K MODEL 1077



General Description:

RF/IF generator modulated by test pattern video output of flying-spot scanner. The scanner uses slides of standard test patterns that are supplied with the instrument.

Signals and voltages generated:

RF—all VHF and UHF channels, modulated by test pattern video

IF—20 to 48 MHz

Audio—FM modulated 4.5-MHz sound channel modulated by a 400-Hz tone generator. 400-Hz tone signal also is available as separate signal

Sync—Negative or positive sync signals, adjustable to 50 volts p-p

Sweep Circuit—vertical and horizontal plate and grid driving signals

Video—various test patterns, produced by scanning positive transparencies with flying-spot scanner system

AGC Keying pulse—high level

Bias voltage—low impedance, calibrated

Chroma—white dot, crosshatch and crystal-controlled color-bar (keyed rainbow) patterns

Size (HWD):

NA

Weight:

NA

Price:

\$379.95

Vectorscopes

**LECTROTECH MODEL V-5
 Vectorscope Indicator**

General Description:

Display instrument used in conjunction with color-bar generator to provide visual display of color vector patterns.



Size (HWD):

7¾" x 4¼" x 7⅝"

Weight:

5 lbs.

Price:

\$79.50

LECTROTECH MODEL V-7

Color Generator and Vectorscope

General Description:

Combination vectorscope and color generator that provides visual display of color vector patterns

Color Generator:

Patterns-generated—keyed rainbow color bar, crosshatch, vertical lines, horizontal lines and dots

Outputs—RF (channels 3, 4 and 5) and video

Additional Features:

Individual gun-killer switches

Color and video level variable



Size (HWD):

8¼" x 7½" x 12⅞"

Weight:

13 lbs. (approx.)

Price:

\$189.50

VTVM's

B&K MODEL 175



DC Ranges:

±0 to 1.5, 5, 15, 50, 150, 500, 1500

AC Ranges:

rms—0 to 1.5, 5, 15, 50, 150, 500, 1500

Peak-to-peak—0 to 4, 14, 40, 140, 400, 1400, 4000

Response:

±1 dB, 40 Hz to 3 MHz. (600-ohm source, 5-volt range)

Resistance:

Full scale—1000, 10,000, 100,000 ohms; 1, 10, 100, 1,000 megohms
Mid-scale—10, 100, 1000, 10,000, 100,000 ohms; 1 meg, 10 megohms

Input Resistance:

11 meg (1 megohm in probe)

Accuracy:

±3% full scale DC and ±5% full scale AC

Meter Movement:

400 ma

Added Features:

Built-in battery eliminator—no ohmmeter battery required
Zero center scale—Single AC/ohms/DC test probe with switch and ground lead

Power Requirements:

117V AC, 50/60 Hz

Accessories:

Model AV-1A RF Probe—increases frequency range up to 250 MHz. Price: \$7.95

Model AV-2A high-voltage probe—increases DC voltage range up to 60,000 volts. Price: \$12.95

Size (HWD):

7½" x 5¾" x 4¼"

Weight:

6 lbs.

Price:

\$59.95

B&K MODEL 177**DC Ranges:**

±0 to 0.5, 1.5, 5, 15, 50, 150, 500, 1500

AC Ranges

rms—0 to 1.5, 5, 15, 50, 150, 500, 1500
Peak-to-peak—0 to 4, 14, 40, 140, 400, 1400, 4000

Response:

±1 dB, 40 Hz to 3 MHz (600-ohm source, 5-volt range)

Resistance:

Full scale—1000, 10,000, 100,000 ohms; 1, 10, 100, 1,000 megohms
Mid-Scale—10, 100, 1000, 10,000, 100,000 ohms; 1, 10 megohms

**Input Resistance:**

11 megohms (1 megohm in probe)

Accuracy:

±3% full scale DC and ±5% full scale AC

Meter Movement:

100 ma, 7", mirrored

Added Features:

Built-in battery eliminator: no ohmmeter battery required.

Zero center scale—Single AC/ohms/DC test probe with switch and ground lead

Zero center scale—Single AC/ohms/DC test probe with switch and ground lead

Power Requirements:

117V AC, 50/60 Hz

Size (HWD):

7½" x 7¼" x 3⅝"

Weight:

7 lbs.

Price:

\$84.95

EICO MODEL 235**DC Ranges:**

0 to 0.5, 1.5, 5, 15, 50, 150, 500, 1500

AC Ranges:

rms—0 to 1.5, 5, 15, 50, 150, 500, 1500
Peak-to-peak—0 to 4, 14, 42, 140, 1400, 4200

Response:

3 Hz to 3MHz, ±1dB (up to 250 MHz using accessory probe)

Resistance:

0 to 1000 megohms in seven ranges

Input Resistance:

DC—11 megohms

AC—1 megohm shunted by 60 pf

Accuracy:

AC/DC—±3% on all scales

Added Feature:

Zero center scale—used in TV-FM sound detector alignment

Size (HWD):

8½" x 7½" x 5"

Weight:

9 lbs.

Price:

\$69.95 (wired)

\$49.95 (kit form)

HICKOK MODEL 470A**DC Ranges:**

0 to 0.5, 1.5, 5, 15, 50, 150, 500, 1500

AC Ranges:

rms—0 to 0.5, 1.5, 5, 15, 50, 150, 500, 1500

Peak-to-peak—0 to 1.4, 4, 14, 40, 140, 400, 1400, 4000

Resistance:

Rx1, x10, x100, x1K, x10K, x100K, x1 meg, x10 meg

Input Impedance:

DC—17.7 megohms

AC—17.7 megohms shunted by 150 pf

Added Features:

Zero center scale—15 Hz to 2.5 MHz

Size (HWD):

6¾" x 7½" x 4½"

Weight:

6 lbs.

Price:

\$89.50

RCA SENIOR VOLTOHMYST MODEL WV-98C (K)**DC Ranges:**

0 to 0.5, 1.5, 5, 15, 50, 150, 500, 1500

AC Ranges:

rms—0 to 1.5, 5, 15, 50, 150, 500, 1500
Peak-to-peak—0 to 4, 14, 42, 140, 420, 1400, 4200

Ohms Ranges:

Seven ranges from 0 to 100° megohms

Input Resistance:

DC—11 megohms

AC—(1.5, 5, 50, 150 volt ranges) 0.83 megohm shunted by 70 pf

500 volt range—1.3 megohm shunted by 60 pf

1500 volt range—1.5 megohm shunted by 60 pf

Frequency Response:

1.5, 5 and 15 volt AC ranges—±1dB
30 Hz to 3 MHz

Accuracy:

All ranges—±3% of full scale

Size (HWD):

6½" x 7" x 3¾"

Weight:

6 lbs.

Price:

\$57.95



Test equipment manufacturers

The following is a list of manufacturers who are active in the service equipment industry. The names of those manufacturers who deal exclusively with the laboratory and production markets have purposely been left out. In compiling this list, every effort has been made to insure completeness and accuracy. Nevertheless, because of changes of address, corporate names, etc., this listing is not as complete as we would like it to be. ELECTRONIC SERVICING will welcome any corrections to this list.

Amphenol Distributor Division, 2875 South 25th Avenue, Broadview, Illinois 60153

B&K Instruments Inc., 5111 W. 164th St., Cleveland, Ohio 44142

B & K division of Dynascan Corporation, 1801 W. Belle Plaine Ave., Chicago, Illinois 60613

Blonder-Tongue Laboratories, Inc. 9 Alling Street, Newark, New Jersey 07102

Channel Master Corporation, Ellenville, New York 12428

Components Specialties, Inc., 101 Buffalo Avenue, Freeport, L. I., N. Y. 11520

Eico Electronic Instrument Co., Inc., Malta Street & Wortman Ave., Brooklyn, New York 11207

Electronic Measurements Corp., 625 Broadway, New York, New York 10012

The Finney Company, 34 West Interstate, Bedford, Ohio 44014

Hallmark Instruments, 6612 Denton Dr., Dallas, Texas 75235

Heath Company, Benton Harbor, Mich. 49022

The Hickok Electrical Instrument Co., 10514 DuPont Avenue, Cleveland, Ohio 44108

Jackson Electrical Instrument Co., 35 Windsor Avenue, Mineola, New York 11501

Jerrold Electronics Corporation, 401 Walnut Street, Philadelphia, Pennsylvania 19105

Karg Laboratories, Inc., 162 Ely Avenue, South Norwalk, Conn. 06854

Lampkin Laboratories, Inc., Bradenton, Florida 33505

Leader Instruments Corp., 101-103 Rome Street, Farmingdale, L. I., N. Y. 11735

Lectrotech, Inc., 1221 W. Devon Ave., Chicago, Ill. 60626

Mercury Electronics Corp., 315 Roslyn Road, Mineola, New York 11501

Pace Communications Corp., 24049 Frampton Ave., Harbor City, California 90701

Precise Electronics division of Designatronics Inc., Mineola, L. I., N. Y. 11501

Precision Apparatus division of Dynascan Corporation, 1801 W. Belle Plaine Ave., Chicago, Ill. 60613

Precision Electronics, Inc., 9101 King Street, Franklin Park, Illinois 60131

Radio Corporation of America, Electronic Components and Devices, Harrison, New Jersey 07029

Seco Electronic Corp., 1001 S. 2nd St., Hopkins, Minn. 44343

Sencore, Inc., 426 South Westgate Drive, Addison, Illinois 60101

Simpson Electric Company, 5200 West Kinzie Street, Chicago, Illinois 60644


Sprague Products Company, North Adams, Mass. 01247

The Triplett Electrical Instrument Co., Bluffton, Ohio 45817

Waterman Instrument Corporation, 400 South Warminster Road, Hatboro, Pa. 19040

Workman Electronic Products, Inc., Box 3828, Sarasota, Fla. 33578

STOP Electrical Failures



SOLENOIDS—Require moisture barrier to prevent arcing: Require lubrication: Require protective film to eliminate corrosion.

CRC 2-26

Soft Film Organic Liquid

- **DISPLACES MOISTURE**—low surface tension, $\frac{1}{2}$ that of water, permits deposit of moisture barrier
- **PREVENTS CORROSION**—protective film seals out corrosive atmospheres from metal surfaces
- **LUBRICATES**—thin uniform film serves as excellent light duty lubricant for moving parts such as sliding contacts, bearings
- **PENETRATES**—loosens corroded products, reaches cracks, crevices

For complete information, write to:

CRC CHEMICALS
Division C. J. Webb, Inc.
DRESHER, PENNA. 19025



Circle 31 on literature card

Make your MOVE to "GAME"



YOUR ONE SOURCE FOR A COMPLETE* LINE OF RECORD CHANGER PARTS

There are over 150 different TETRAD cartridges. Game has them all. TRY US AND SEE!



Game ELECTRONIC PRODUCTS
and
GAME INDUSTRIES INC.
AVAILABLE FROM
YOUR LOCAL DISTRIBUTOR.



Circle 32 on literature card

Electronic Servicing Tube Substitution Supplement

This Supplement has been designed to provide you with the latest up-to-date information on new tubes. The format allows maximum use during a house call or at the bench.



Direct substitutes

Included are the older tubes that will substitute directly for the new tubes. This information supplements the sections in the Tube Substitution Handbook for American Receiving Tubes and Picture Tubes.

Basing diagrams

The basing diagram for each new tube will help you in the servicing of new receivers when service literature is not available.

Typical characteristics

The typical, or average, characteristics of each new tube can be of great help when troubleshooting new circuits.


easy reference

The direct substitution list will be cumulative each month. Thus, only the latest edition need be carried in the Tube Substitution Handbook.

31A1L10

Pentode—Vertical output
Triode 1—Vertical Oscillator
Triode 2—Sync Clipper
Fil.—31.5 @ 0.315A (11 sec)
Triode Triode

Pentode	1	2
E_p	120	150
E_{s2}	110	V
E_{s1}	-8	-5
R_k	—	—
I_p	46	5.4
I_{s2}	3.5	ma
G_m	7100	3900
M_u	43	20




12HR

32HQ7

Pentode—Horizontal Output
Diode—Damper
Fil.—32.6V @ 0.31A (11 sec)
Diode PIV—3300V @ 600 ma
Diode Section—tube voltage drop approx. 16V


Pentode	Diode
E_p	110
E_{s2}	110
E_{s1}	-22.5
R_k	—
I_p	42
I_{s2}	2.4
G_m	4500
M_u	—



12HT

22ZP4

Protection—Banded Rim & Tension band
Deflection—114°
Fil.—6.3V @ 0.45A
Grid 2—400V



8HR

REMOVE THIS
SUPPLEMENT FROM
Electronic Servicing
and put it in
the back of your
**TUBE
SUBSTITUTION
HANDBOOK**

Direct Substitutions

To Replace	Use	To Replace	Use
5MQ8	*	16LU8A	16LU8
6AG9	6AL9	31AL10	*
6AK10	6AG9	32HQ7	*
6AL9	*	12DEP4	*
6MQ8	*	12DHP4	*
8AL9	*	19HNP22	*
9AK10	*	22TP4	*
10LY8	*	22ZP4	*
16BX11	*	25ALP22	*
16LU8	16LU8A		


*No substitution at present time.
 Twelfth edition of Tube Substitution Handbook now available at your distributor.

General Specifications


Pentode—Video amplifier
 Triode—General purpose
 Fil.—6.3V @ 0.82A
 Pentode Triode

EP	=	250	200	V
E _g	=	150	---	V
E _c	=	0	---	V
R _k	=	56	270	Ω
IP	=	28	7.6	ma
I _{sg}	=	5.6	---	ma
G _m	=	30,000	6300	μmhos
M _u	=	---	59	---

6AL9

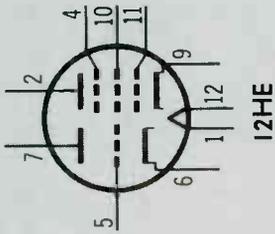


8AL9

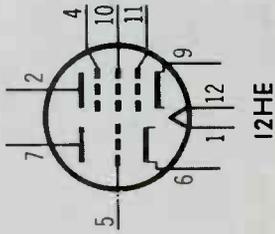

Same as 6AL9 except for heater Voltage.
 Fil.—8.6V @ 0.04A

9AK10


Triode 1—Color difference amplifier
 Triode 3—Color difference amplifier
 Triode 3—Color difference amplifier
 Fil.—9.5V @ 0.6A (11 sec)
 EP = 200V
 E_g = 7V
 R_k = 7500
 IP = 10 ma
 G_m = 7000
 M_u = 53

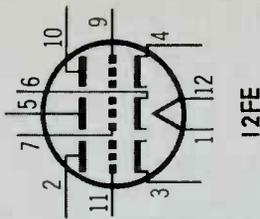

16BX11

Pentode—Video amplifier
 Triode 1—General purpose
 Triode 2—General purpose
 Fil.—16V @ 0.315A (11 sec)
 Pentode Triode


EP	=	125	150	150	V
E _g	=	125	---	---	V
E _c	=	0	-6	-4.5	V
R _k	=	56	150	220	Ω
IP	=	12	11	7.6	ma
I _{sg}	=	3.8	---	---	ma
G _m	=	11,300	6200	6800	μmhos
M _u	=	---	42	57	---

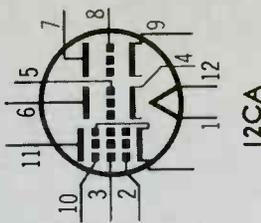

16LU8A

Pentode—Vertical output
 Triode—Vertical oscillator
 Fil.—16V @ 0.6A (11 sec)
 Direct Replacement—16LU8
 Pentode Triode

EP	=	135	250	V	
E _g	=	120	---	V	
E _c	=	-10	-4	V	
R _k	=	---	56	2.3	ma
IP	=	---	3	---	ma
I _{sg}	=	---	9300	3600	μmhos
G _m	=	---	---	58	---

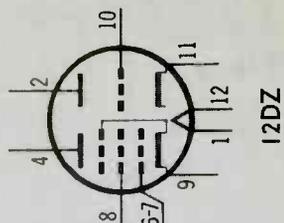

photofactTMbulletin

PHOTOFACT BULLETIN lists new PHOTOFACT coverage issued during the last month for new TV chassis. This is another way ELECTRONIC SERVICING brings you the very latest facts you need to keep fully informed between regular issues of PHOTOFACT Index Supplements issued in March, June, and September.

ARVIN	67K58 (Ch. 1.22801)	1018-1
BRADFORD	DMAT-55319, DMAT-55327	1016-1
	DWGE-89706A, DWGE-89714A	1013-1
	AM-FM Radio	1013-1A
GENERAL ELECTRIC	Chassis AE, A1	1015-1
MAGNAVOX	Chassis T932-01-AA, T932-01-BB	1017-1
NIVICO	2600, 2610	1018-2
PANASONIC	AN-32, AN-42D	1013-2
	AN-52W	1014-1
	TR-339R	1016-2
	AN-69/C, AN-79/C	

	(Ch. N49A)	1017-2
SEARS	5024 (Ch. 562.10450)	1014-2
	4109 (Ch. 564.80090)	1015-2
	81661 (Ch. 562.10412)	1016-3
WARDS AIRLINE	GHJ-17349A/359A/ 429A/449A/459A	1018-3
ZENITH	Chassis 16Z7C17, 16Z7C19	1014-3
	Remote Receiver S-80373, Transmitter S-68933	1014-3A
	<i>Production Change Bulletin</i>	
ADMIRAL	Chassis 2H525-1, M2H525-1, M3H554-1, M4H531-1	1013-3
PHILCO	Chassis 17MT80/A/B	1017-3
RCA	Chassis KCS165A	1013-3
SEARS SILVERTONE	Chassis 456/528/529.70282 thru 456/528/529.70288	1017-3
WESTINGHOUSE	Chassis V-2486-6/-13/-14, V-2660	1013-3
	Chassis V-2436-1/-2	1017-3
ZENITH	Chassis 13X15, 13X15Z 14M20Z	1017-3
	Chassis 14N26Z, 14X26	1013-3

Zenith "Royal Crest" Tubes... with unrivaled dependability

Zenith "Royal Crest" replacement circuit tubes are engineered to the same exacting standards as original Zenith circuit tubes in new sets. With the same unrivaled dependability and "new set" performance.

Zenith "Royal Crest" circuit tubes are life-tested under actual operating conditions for more than 1,500,000 hours every month!

The "Royal Crest" line is broad and comprehensive. Over 900 different types, all built to Zenith rigid quality standards.

Insist on Zenith quality. Choose Zenith's "Royal Crest" circuit tubes and assure customer satisfaction.

EXCITING SURPRISES FOR YOU—and your family!
Get the details at your Zenith Distributor's Parts Department.

Why not sell the best



The quality goes in
before the name goes on



Circle 33 on literature card

test equipment

notes on analysis of test instruments, their operation and applications



Sencore Model TF151 Transistor and FET Tester

Sencore TF151 Transistor and FET Tester

The design trend in home entertainment equipment is increasingly in favor of solid-state devices. Most manufacturers who have not gone completely solid state are using solid-state devices in over 50% of their circuits.

With the increase of solid-state devices the use of the transistor checker will also increase, and, in the very near future, it will be not only a bench instrument but, also, a must in the service truck.


One of the latest entries in the field of transistor checkers is the Sencore Transistor/FET tester, Model TF151.

Transistor Tests

The model TF151 performs the following tests of transistors:

1. AC beta—both in- and out-of-circuit tests of high- and low-power and RF-type transistors.
2. Leakage (I_{CBO}) tests of low- and high-power and RF-type transistors.

Schematic diagram of basic circuitry used in Model TF151

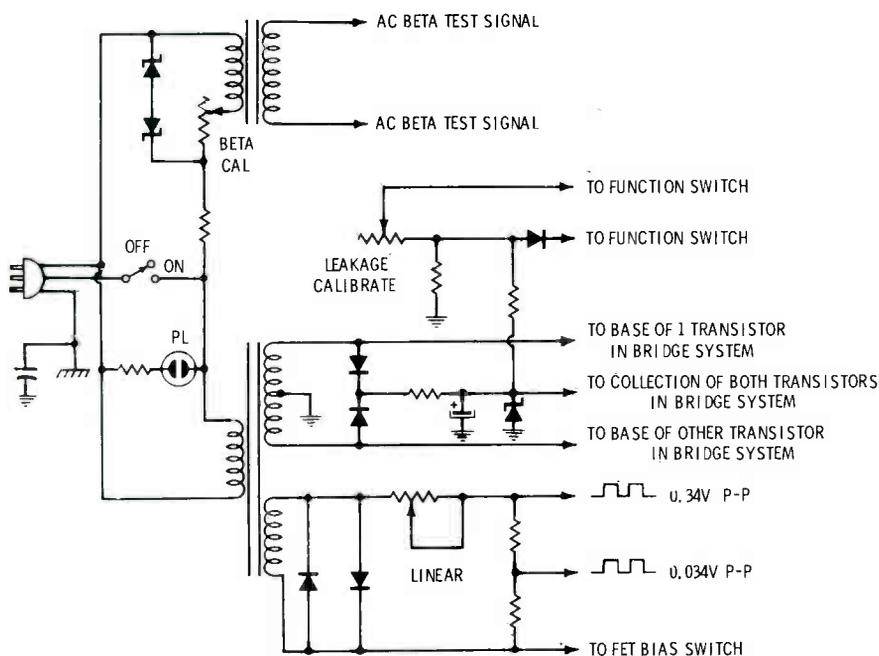

3. Transconductance (G_m) of FET's—both in- and out-of-circuit tests.

4. Gate leakage of FET's (I_{GSS}).

5. Diode ratios—both in- and out-of-circuit tests.

Circuit Description

Beta is the ratio of average collector current to the average base current of a transistor connected in a common-emitter circuit. In testing the AC beta of a transistor, the TF151 simultaneously applies 60-Hz signals between the collector and emitter and base and emitter. The ratio of the average collector current to the average base current of one cycle of operation is the AC beta.

The amplitude of the AC signal applied to the transistor under test is set by the BETA CAL control. The BETA CAL control is adjusted for each transistor under test according to that transistor's specifications.

BETA CAL settings are 0.2 ma, 2.0 ma or 20 ma. The 0.2 ma setting is used for low-saturation types of transistors, 2.0 ma for low-power types and the 20 ma setting for high-power types. The average collector current is indicated by the meter, and is set for proper value by adjusting the BETA CAL control for full scale meter deflection with the function switch set at the desired input level.

When the pushbutton labeled GAIN is depressed, the meter is transferred from the collector circuit to the base circuit of the transistor, and the meter indicates the average base current. With the function switch set at the X1 range, the meter has the same sensitivity as previously mentioned and will measure 0.2, 2.0 or 20 ma of base current. Placing the function switch in the X10 range increases the sensitivity by a factor of 10.

Zener diodes are utilized to clamp the applied AC signals to the selected level and prevent any sudden change due to line-voltage fluctuation.

Capacitors are connected to the base and collector circuits of the transistor under test to provide a return path for the AC signal.

A neutralizing capacitor is provided to prevent the component under test from developing spurious oscillations.

A switch, located immediately under the meter face at the left hand side of the tester, controls the polarity of the meter for beta checks and the polarity of the applied voltages when making leakage tests.

Leakage tests are performed by applying 4 volts DC between the collector and base, then measuring the current flow. A potential of 6 volts DC is developed by a rectifier circuit and clamped at the 6-volt level by a zener diode. A resistance-type voltage divider then provides the 4 volts DC necessary for leakage checks.

A diode and resistor shunt the meter during leakage tests to increase the full-scale deflection current from 200 ua to 5000 ua. The non-linear characteristics of the diode and series resistor cause the meter to read direct for the first half of the scale. The diode then conducts and a portion of the current is shunted, producing the non-linear leakage scale on the meter. The leakage circuit is the same for both conventional transistors and FET's.

Because FET's are tested for transconductance (Gm) rather than beta, the FET section is independent of the regular transistor test section. The system employed in Model TF151 for testing FET's utilizes two transistors and four resistors in a bridge configuration.

The transistors function as switches and are turned on or off by the applied AC signal. An input transformer applies the AC signal to the base of the two transistors in the bridge configuration. With the system connected between the drain and source of an FET, the Gm ZERO control, directly under the meter at the right-hand side, is adjusted for equal current flow in the bridge circuit so that the meter reads zero.

The impedance of the bridge circuit is low, and voltage applied to the drain of the FET under test is held constant to conform to the formula for testing Gm.

A constant-amplitude square wave "generator" circuit is then applied to a resistance-type voltage divider network, which includes the LINEAR control. The LINEAR control is adjusted so that the applied square wave is 0.34 volts p-p

when the function switch is in the "Gm X1" range. When the function switch is in the "Gm X10" range, the 0.34-volt p-p signal is fed through a voltage divider made up of precision resistors, which lowers the signal to 0.034 volts p-p.

When the square-wave signal is applied to the gate of the FET under test, the FET will conduct more on one half of the cycle than the other. This results in an imbalance in the bridge system (more current flowing in one half than the other). The meter indicates the extent of the imbalance. The amount the FET will conduct is related directly to the Gm specification of the device. An FET BIAS switch, located in the lower center directly under the function switch, selects either NORM (reverse bias) for depletion, or POS (forward bias) for enhancement types of FET.

A grounded (3-prong) line plug is used to keep the case of the instrument at ground potential to prevent the possibility of damage to insulated-gate type FET's when they are checked out of circuit.

Calibration Procedures

Chassis Removal:

1. Remove the two retaining screws from the bottom of the case.
2. Remove the two retaining screws located at the top of the reference book holder on rear of case.
3. Lift the front panel away from the case to expose the leakage and Gm calibration controls located on the top of the chassis.
4. To reassemble, reverse the procedure.

Leakage calibration:

1. Set the TYPE switch to the NPN or PNP position.
2. Set the FUNCTION switch to the LEAKAGE position on the regular transistor side of the switch.
3. Connect the positive lead of a 1-ma meter to the C (collector) jack and the negative lead to a 2000-ohm potentiometer.
4. Connect the other side of the 2000-ohm potentiometer to the B (base) jack of the TF151.
5. Adjust the 2000-ohm potentiometer to obtain a reading of 1 ma on the external meter.
6. The meter on the TF151 should

now indicate 1 ma; if it does not, adjust the leakage calibration control until the TF151 meter indicates 1 ma.

Gm calibration:

1. Connect the vertical input of an oscilloscope to the G1 (gate) jack of the TF151.
2. Connect the oscilloscope ground lead to the S (source) jack.
3. Set the FUNCTION switch to X1 position of the GATE 1 section and depress the GAIN push-button.
4. The signal observed on the oscilloscope should be a square wave of 0.34 volts p-p.
5. If the signal is not 0.34 volts p-p, adjust the Gm CAL control until the indication is correct. The signal in the Gm X10 range is derived from a fixed precision resistor and requires no adjustment. ▲

Sencore Model TF151 Specifications

Regular Transistor (Bi-Polar) Testing Beta (Hfe) measured at 60 Hz

Ranges:	Beta	Ic
Low Power		
X1	1-50	2.0 ma
X10	10-500	2.0 ma
High Power		
X1	1-50	20 ma
X10	10-500	20 ma
RF types		
X1	1-50	0.2 ma

Leakage

ICBO measured at VCB = 4 volts, IE = 0

One Range

0-100 microamperes first half of scale

100-5,000 microamperes last half of scale

Field Effect Transistors

Transconductance (Gm) measured at
VDS = 5 volts, VGS = 0

Range:	Gm
X1	0-5,000 microhms
X10	0-50,000 microhms

Gate Leakage

IGSS measures at VGS = 4 volts, VDS = 0

One Range

0-100 microamperes first half of scale

100-5,000 microamperes last half of scale

Zero Bias Drain Current

IDSS measured at VDS = 5 volts, VGS = 0

Size (HWD):

9½" x 7½" x 6"

Weight:

9 lbs.

Price:

NA


productreport

for further information on any of the following items, circle the associated number on the reader service card.

Patch Cord (45)

A new right angle banana plug patch cord, featuring stack-up capability, has been introduced by **Pomona Electronics Co., Inc.**

The vertical stacking feature of the new Model 2864 permits endless circuit connections, and right angle design keeps wires close to chassis. An oversize shoulder allows

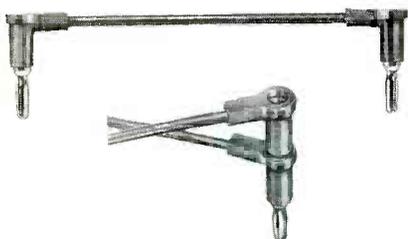

easy connect and disconnect. Also offered is a similar patch cord, Model 2860, with miniature banana plugs to fit 0.104 diameter banana jacks.

Banana plug springs are made of one piece beryllium copper, heat treated for maximum life, and rounded for greater contact area. Tough thermoplastic insulation, molded to nickel plated brass body and wire, provides a strong moisture-proof integral unit.

Both models are available in 10 colors and wire length from 4" to 60". The price is \$1.50.

Tape Head Cleaner (46)

The availability of a new aerosol-

type cleaner for all audio and video magnetic tape heads, guides and film gates, has been announced by **GC Electronics.**

The product, Audio-Video Tape Head Cleaner, is completely safe for use on all types of recording heads and will quickly remove all dirt, film and oxide build-up. It will not harm valuable tapes, tape coatings or the finish of the recorder itself. When used as directed, the cleaner will not interfere with transmission and may be safely applied on running tape. Audio-Video Tape Head Cleaner is non-toxic, non-conductive and non-flammable.



The cleaner is available in a 16-ounce aerosol can equipped with a 6" spray extension. The price is \$2.35 per can.

LOOK! A NEW ELECTRONICS SLIDE RULE with complete instruction program



Here's a great *new* way to solve electronic problems accurately, easily . . . a useful tool for technicians, engineers, students, radio-TV servicemen and hobbyists. The Cleveland Institute Electronics Slide Rule is the only rule designed *specifically* for the exacting requirements of electronics computation. It comes complete with an illustrated Instruction Course. You get four AUTO-PROGRAMMED lessons . . . each with a short quiz you can send in for grading and consultation by CIE's expert instructors.

See for yourself. Learn how to whip through

all kinds of reactance, resonance, inductance, AC and DC circuitry problems in seconds . . . become a whiz at conventional computations too!

This all-metal 10" rule is made to our rigid specs by Pickett, Inc. . . . comes complete with top grain leather carrying case *and* Instruction Course. A \$50 value for less than \$10. Send coupon for FREE illustrated booklet *and* FREE Pocket Electronics Data Guide, without obligation. Cleveland Institute of Electronics, 1776 E. 17th St., Dept. PF-126, Cleveland, Ohio 44114. *TRADEMARK

GET BOTH FREE!



Send coupon today →

Cleveland Institute of Electronics

1776 E. 17th St., Dept. PF-126, Cleveland, Ohio 44114

Send FREE Electronics Slide Rule Booklet. Special Bonus: Mail promptly and get FREE Pocket Electronics Data Guide too!

NAME _____ (Please Print)
 ADDRESS _____ COUNTY _____
 CITY _____ STATE _____ ZIP _____

A leader in Electronics Training... since 1934

Circle 34 on literature card

Record Cleaning and Maintenance Kit (47)

The new Watts Hi-Fi Parastat introduced by **Elpa Marketing Industries, Inc.**, is designed and intended for use on new records and records in new condition which are to be played with cartridges requiring

very low tracking pressures of 2 grams or less.

With a pressure of about 2 lbs. applied to the brush, which is ground down to near infinity, the pressure of each individual bristle on the surface of the disc is of the order of 1/10 gram. The pointing angles used, the natural resilience of the nylon and the very large number of bristles produce countless oscillations as the myriad twists and turns of the groove are followed.



A correct level of humidity is ensured in the case of the Hi-Fi Parastate by the maintenance of a humid atmosphere within the case and activation immediately before use. The price is \$15.00.

Diode Curve Tracer (48)

Measurement Control Devices has introduced its Model CT-501 Diode Curve Tracer for high speed selection or comparison of diodes in the lab, on production lines or for quality control. Incorporation of a 3" CRT for visual display permits the tracer to present characteristics of all types of diodes. A built-in cal-



FAR SUPERIOR TO ANY VTVM OR VOM

-and for less money only \$69.95



NEW FIELD EFFECT MULTIMETER


Here is the revolutionary new approach to circuit testing, the solid state Sencore FIELD EFFECT METER. This FE14 combines the advantages of a VTVM and the portability and versatility of a VOM into a single low-cost instrument. This is all made possible by the use of the new space age field effect transistor that is instant in action but operates like a vacuum tube in loading characteristics. Compare the features of the FIELD EFFECT METER to your VTVM or VOM.

Minimum circuit loading — 15 megohm input impedance on DC is better than a VTVM and up to 750 times better than a 20,000 ohm per volt VOM — 10 megohm input impedance on AC is 20 times better than a standard VTVM. The FIELD EFFECT METER is constant on all ranges, not like a VOM that changes loading with each range.

Seven AC peak-to-peak ranges with frequency response to 10MHz. Seven zero center scales down to 0.5 volt. Five ohmmeter ranges to 1000 megohms. DC current measurements to 1 ampere. Full meter and circuit protection. Mirrorrad scale. Low current drain on batteries — less than 2 milliamps. Built-in battery check. Unbreakable all-steel vinyl clad case. Optional Hi-Voltage probe adds 3KV, 10KV and 30KV ranges with minimum circuit loading for greatest accuracy in the industry... \$9.95.

FE16 HI-ACCURACY FIELD EFFECT METER.

All of above features, plus unmatched accuracy — 1.5% on DC, 3% on AC. High-style meter, knobs, and special meter-tilting handle. **\$84.50.**



SENCORE

NO. 1 MANUFACTURER OF ELECTRONIC MAINTENANCE EQUIPMENT

426 SOUTH WESTGATE DRIVE, ADDISON, ILLINOIS 60101

Circle 35 on literature card

SPOT CHECK

**A RED INDICATOR
APPEARS ON THE
FACE OF YOUR TAPE
HEAD WHEN THERE
ARE ABOUT 100
HOURS OF WEAR LEFT**

FREE BROCHURE

ASK FOR
SPOT CHECK
BROCHURE

MICHIGAN MAGNETICS

A DIVISION OF VSI CORPORATION
VERMONTVILLE, MICHIGAN 49096
Telephone (517) 259-8911

Circle 36 on literature card

NEW BERN'S PERFECT PIN CRIMPER

Picture-Tube Repair Tool
Also for—5U4, 6SN7, 6BQ6, etc.
Eliminates that hard soldering job
only \$1.69 each

A MUST for round color pic tubes
PT-1 3/32" PIN

Fix loose pin connections in seconds. Pays for itself in time saved on first job. Less than 3" long. Carry it in your pocket.

Intermittent operation of picture tubes and other tubes due to defective solder connections easily corrected. Provides solid electrical connections, can also be used as channel-selector wrench and screwdriver. Pin keeps its original form. A 3-in-1 tool.

3 MODELS ELIMINATE SOLDERING
Makes Solid Electrical Connections

Phono Pin-Plug Crimper
Slip wire in "pin plug," insert in tool, and squeeze... job is done.

AU-2 1/8" PIN
C-Rings 3 for 5¢

Use end of tool to push on C-ring for ground connection.

Ant. plugs, hi-fi, multiple plugs, public address, radio and TV tubes, radar, speakers, and loop connections. Many, many more uses.

Model LC-3 for 5/32" pin diameter
At your parts distributor, or write us

BERN'S MANUFACTURING CO.
60000 KUNSTMAN
WASHINGTON, MICH. 48094

Circle 37 on literature card

productreport

for further information on any of the following items, circle the associated number on the reader service card.

(continued)

ibrator on the tracer facilitates precise calibration, and the unit's line and load are regulated to 1% while overall accuracy is within 3%.

The unit analyzes diode operating conditions to a maximum of 2 kv in the reverse direction or 10 amps in the forward direction. Horizontal axis of the CRT is calibrated in volts/division ranging from 0.1V to 100V; vertical axis is calibrated in amperes/division ranging from 10 ua to 2 amps. Each axis is provided with an "x" 1 and "x" 2 multiplier. The tracer operates with an input voltage of 115 VAC, 60 Hz.

Compact and lightweight, the unit diode curve tracer is 9" x 8½" x 12" and is priced at \$295.

Oscilloscope/Vectorscope (49)

A new wide-band, high-sensitivity 5-MHz oscilloscope-vectorscope specifically designed for waveform observation in TV is announced by Mercury Electronics Corp.



Vectorscope calibrations on the scope's graticule and deflection-plate terminals at the rear of the cabinet permit the Model 3000 to be used as a vectorscope.

The wide-band vertical amplifier has a sensitivity of 4.6 mv rms/cm. The horizontal amplifier has a frequency response of 5 Hz up to 500

KHz, ± 3 dB. The unit is 11" x 9" x 16" and weighs 22 lbs. Price is \$159.95 wired, or \$109.95 in kit form.

Portable VOM-type Instrument (50)

A portable VOM-type instrument, able to measure exact values of resistances in-circuit, has been introduced by **Hirst Associates**. Known as Guardohm, it has a solid-state circuit design which provides isolation "guarding" without having to remove resistances from a circuit before an exact measurement can be made.




Other features include a selectable, constant current output from one microampere to 100 milliamperes, a taut-band meter movement featuring greater resistance to shock and vibration, increased sensitivity, anti-glare window, magnetically shielded meter movement; a meter scale with all readings, including resistance, displayed linearly; one percent accuracy; console-type housing, convenient bench use, tip-over resistant; sturdy, high-impact resistant plastic case; and is AC operated.

Matrix functions include resistance measurement, DC current measurement, DC voltage measurement and DC current generation. The price is approximately \$330.00.

Color Bar Pattern Generator (51)

The Model LCG-389 is a compact, solid-state color-bar pattern generator used extensively for production testing and field servicing. Introduced by **Leader Instruments Corp.**, the instrument is designed for convergence and synchronizing adjustments in color and monochrome TV receivers. Five basic

patterns are displayed: gated rainbow color bars, square crosshatch, horizontal lines, vertical lines, and small well-defined dots. Gun killers are provided for convergence adjustments. The only connection is made to the TV receiver antenna input.

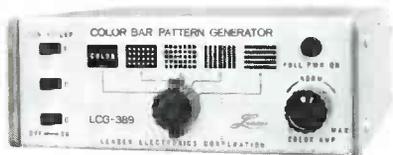

The price is \$99.50.

FM Signal Generator (52)

Radio Research Company has recently introduced their new FM Signal Generator Model 61. The instrument provides full control over RF level from high level to fractional microvolt. For use either in the laboratory or production line.

Completely solid state with rugged, high-quality construction throughout, the warm-up drift is negligible. Proper attention to thermal stability assures the user of virtually unchanged performance over a wide ambient range.

The unit employs a wide modulation bandwidth which allows true stereo separation measurements to be made when driven by an appropriate stereo source. Phase shift and flatness errors on external modulation have been minimized.




Features include an AF output jack to facilitate scope monitoring of the complex modulation waveform, which may also be used for scope horizontal drive when used in sweep applications.

The price is \$695.00. An optional low-frequency adapter is \$145.00.

advertisers' index

Aerovox Corp.	42
Arrow Fastener Company, Inc. ...	28
B & K Manufacturing Co. Div. of Dynascan Corp.	1
Berns Mfg. Co.	70
Bussmann Mfg. Div. McGraw-Edison Co.	7
CRC Chemicals	61
Castle TV Tuner Service Inc. ...	5
Cleveland Institute of Electronics	68
Cornell Dubilier Elec- tronics	Cover 2
Electro-Voice, Inc.	8
The Finney Company	25
Game Industries, Inc.	61
General Electric Co.	23, 37
Gem City Tuner Repair Service..	16
Heath Company	33
International Correspondence Schools	9
Jensen Mfg. Div. The Muter Co.	14
E. F. Johnson Co.	19
Lakeside Industries	53
Leader Test Instruments	72
Lectrotech, Inc.	6
Littelfuse, Inc.	Cover 4
Mercury Electronics Corp.	43
Michigan Magnetics	70
Mosley Electronics, Inc.	6
Quietrole Company	71
RCA Electronic Components	Cover 3, 15
RCA Institutes, Inc.	29
RMS Electronics, Inc.	57
Raytheon Company	51
Rohn Mfg. Company	47
S & A Electronics	71
Howard W. Sams & Co., Inc.	55
Sencore, Inc.	17, 35, 41, 69
Sylvania Electric Products, Inc. ...	27
Tuner Service Corp.	3
Winegard Company	20-21
Zenith Sales Co.	65

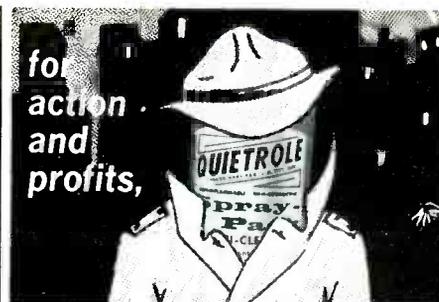

check the "Silencer" QUIETROLE



Check QUIETROLE ... the "Silencer" for noisy radio, TV, (black and white, color too) and instrument controls, that protects your reputation, guards your profits.



QUIETROLE, the quality lubricant-cleaner for over 20 years, is harmless to plastics and metals, is non-conductive, non-corrosive, non-flammable... with zero effect on capacity and resistance.




For best results, specify QUIETROLE ... Mark II for tuners Spray Pack for controls and switches Silitron for general use Available in Aerosol Can or Dropper Bottle



manufactured by
QUIETROLE COMPANY
Spartanburg, South Carolina
Circle 38 on literature card

ELIMINATE CALL-BACKS

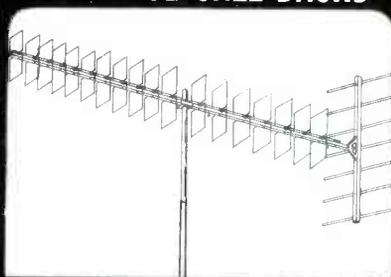

Revolutionary MODEL UPW UHF PASSIVE WAVE ANTENNA

This system in which there are no electrical connections,
PROVIDES HIGH GAIN ACROSS THE ENTIRE UHF BAND

and eliminates noise caused by loose elements at high frequencies. High overall gain across the entire UHF band makes this antenna more desirable than any frequency conscious yagi types being marketed today. Excellent color reception assured. More gain than a Parabolic. Top quality construction.


Write for literature and low retail prices. All inquiries given prompt attention.

S & A ELECTRONICS INC.
Manufacturers of the TARGET ANTENNA
206 West Florence Street • Toledo, Ohio 43605
Phone 419-693-0528

Circle 39 on literature card

15 patterns!

Color Bar Pattern Generator

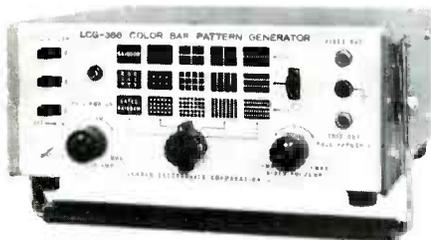

LCG-388

Pattern appears instantly when turned on, and has laboratory standard stability. Only 3 1/8 x 7 3/4 x 7 3/4, and weighs about 4 1/2 lbs.

- Crystal controlled oscillator.
- Flipflop and logic circuitry assure highest operating stability
- One receiver input to TV antenna
- Two selectable TV channels
- Chroma level control — 0 to 200%
- Horizontal line flickering prevented by progressive scanning
- Video output
- Gun killers for convergence adjustments
- Trigger output for scope synchronization

ONLY \$149

**LEADER
INSTRUMENTS CORP.**

24-20 Jackson Avenue
Long Island City, New York
(212) 729-7410

Circle 40 on literature card

Got a Troubleshooting Tip?

If you've recently run across an unusual trouble symptom and have determined what caused it, why not pass the info on to the other readers of ELECTRONIC SERVICING. You'll not only be saving other service technicians valuable troubleshooting time, you'll also be making a little extra change for yourself. Send a thorough description of the trouble symptom and the solution along with a brief discussion of your troubleshooting technique to:

Troubleshooting Tip, ELECTRONIC SERVICING
1014 Wyandotte Street, Kansas City, Missouri 64105

catalogs literature

ANTENNAS

100. *Ava Electronics* — Cross reference guide sheet #1-69 for CATV "F" connectors gives parts numbers and crosses Jerrold, Craftsman, Blonder-Tongue, Viking and AVA.
101. *Hy-Gain Electronics*—64-page catalog of Antennas and Antenna Systems includes all antenna configurations covering a frequency range of 2 MHz to 1100 MHz.
102. *JFD Electronics* — New MATV specification book features printing on gummed stock and perforations for easy removal. It includes system functions, antennas, amplifiers and tests.

AUDIO

103. *Jensen*—Catalog 1090-C Concert and Viking Series Loudspeakers gives replacement applications and information on custom installation.*

COMPONENTS

104. *Bussmann*—16-page 1969 booklet "Buss Fuse Car and Truck List" gives fuses for all model cars and trucks, foreign and domestic.*
105. *Cornell-Dubilier* — 68-page

cross-reference helps locate single, dual, triple and quadruple section replacement electrolytics. A listing of their new tubular capacitors is also included.*

106. *Essex*—SC-4 RBM Standard Controls Catalog lists 450 electronic relays and contractors with pictures, prices, full technical data and specifications.
107. *Raytheon*—74-page catalog describes nearly 400 types of high reliability silicon transistors.*

SPECIAL EQUIPMENT

108. *Seton*—Catalog 69-B shows 155 different identification products including advertising posters, truck signs, decals, name plates and property identification tags.
109. *Howard W. Sams*—Literature describes popular and informative publications on radio and TV servicing, communication, audio, hi-fi and industrial electronics, including 1969 catalog of technical books on every phase of electronics.*

TEST EQUIPMENT

110. *Heath*—68-page Scientific Instrumentation Catalog features new instruments available with full specifications, illustrations and many schematics.*

TOOLS

111. *Janel*—Catalog on precision hand tools includes tweezers, cutters, pliers, soldering tools, semiconductor tweezers, brushes, and hemostats.

TUBES AND SEMICONDUCTORS

112. *Motorola*—6-page catalog, SG-15 Field-Effect Transistors Selector Guide, covers the company's line of field-effect transistors.
113. *Thor Electronics*—16-page "1969 Wholesale Electronic Tube Purchasing Guide" lists over 7,000 tubes and prices.

*Check "Index to Advertisers" for additional information.

USE THE HANDY CARD BELOW TO OBTAIN FREE CATALOGS & LITERATURE

As a service to its readers **ELECTRONIC SERVICING** makes this postpaid card available for your convenience in obtaining current manufacturers' literature.

To use the card simply:

- Circle the numbers corresponding to the numbers of the items appearing either in the "Catalog & Literature" department or in the "Product Report" department.
- Print your name and address and check your occupation.
- Include ZIP code—requests may not be filled without it.
- Tear out lower half of this insert and place in mailbox.

Note the deadline date — Requests received after this cannot be handled.

MARCH, 1969
OFFER EXPIRES JUNE 1, 1969

Please indicate number of items you have circled →

1 2 3 4 5 5 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22
 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44
 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66
 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88
 89 90 91 92 93 94 95 96 97 98 99 100 101 102 103 104 105 106 107 108 109 110
 111 112 113 114 115 116 117 118 119 120 121 122 123 124 125 126 127 128 129 130 131 132
 133 134 135 136 137 138 139 140 141 142 143 144 145 146 147 148 149 150 151 152 153 154
 155 156 157 158 159 160 161 162 163 164 165 166 167 168 169 170 171 172 173 174 175 176

Print plainly or type below

Name

Firm

Firm Address

City

State

Zip

Did you receive this issue through

Distributor

Subscription

Enter my subscription to **ELECTRONIC SERVICING**

3 Years \$10.00 2 Years \$8.00 1 Year \$5.00

Bill Me Remittance Enclosed

Extend Present Subscription

Rates apply only in U.S.A., its possessions and Canada.
Other countries please add \$1.00 per year.

Please check business Classification:

A. Independent Radio, TV Serviceman

B. Full time

C. Retailer with Service Department

D. Part time

E. Owner or Manager

F. Service Manager

G. Employee

H. Other (Specify occupation)

USE THE HANDY CARD BELOW TO OBTAIN FREE CATALOGS & LITERATURE

As a service to its readers **ELECTRONIC SERVICING** makes this postpaid card available for your convenience in obtaining current manufacturers' literature.

To use the card simply:

- a. Circle the numbers corresponding to the numbers of the items appearing either in the "Catalog & Literature" department or in the "Product Report" department.
- b. Print your name and address and check your occupation.
- c. Include ZIP code—requests may not be filled without it.
- d. Tear out lower half of this insert and place in mailbox.

Note the deadline date — Requests received after this cannot be handled.

FIRST CLASS
PERMIT NO. 217
Clinton, Iowa

BUSINESS REPLY MAIL

No Postage Necessary if Mailed in the United States

POSTAGE WILL BE PAID BY—

Electronic Servicing

P. O. BOX 2609
CLINTON, IOWA 52732

B

The brand new RCA Color-TV Service Handbook (1A1759) gives you all the specific service information you need to do routine service adjustments and preliminary trouble-shooting on 15 Makes of 1967 and 1968 Color Sets...including Admiral, Airline, RCA, Silvertone, Curtis Mathes, Emerson, General Electric, Magnavox, Motorola, Olympic, Packard Bell, Philco, Zenith, Hoffman, Sylvania. In fact, all the data you usually need on a service call is in this book!

And it's free when you order the RCA Color Pack '69. You get an assortment of 21 RCA receiving tubes, representing ten popular types for color TV plus the new RCA Color-TV Service Handbook, all for the price of the tubes alone! Order the Color Pack '69 from your local participating RCA Distributor today! RCA Electronic Components, Harrison, N.J. 07029.

This is free

when you order this



RCA

Give yourself a break you can depend on!



actual size
1 3/4" x 1 3/4" x 1/2"



#094077

CIRCUIT BREAKER CADDY

10 ratings, one each 2-1/4,
2-1/2, 2-3/4, 3, 3-1/4, 4,
4-1/2, 5, 6 and 7 amps.

SERVICE CADDY

Breakers and Fuses

One service call is all
—8 breakers—one rating
each 2-1/4, 2-3/4, 3, 3-1/4,
4, 4-1/2, 5 and 7 amps and
30 fuses—five each type C3/10,
C1/2, C3-1/2, N3/10, N7/10 and N1.



#094076

Designed for the protection of television receiver circuits, the Littelfuse Manual Reset Circuit Breaker is also ideally suited as a current overload protector for all types of electronic and electrical control wiring such as model railroads and power operated toy transformers, hair dryers, small household appliances, home workshop power tools, office machines and small fractional horsepower motors.

Available individually packaged one breaker per display card; or 5 breakers of same rating per unit pack or as complete, versatile assortments for shop use or replacements in the field.



Included with each assortment:

Pocket size cross reference on color and black/white TV circuit breaker applications.
Form No. CBCRP-1266H

LITTELFUSE

DES PLAINES, ILLINOIS

Circle 41 on literature card

www.americanradiohistory.com