

1

2

3

4

5

1




2

3

4

5

1. ALL RESISTANCE VALUES IN OHMS; K=1000 OHMS M=1 MILLION OHMS
2. RESISTORS ARE 1/2W ± 10% UNLESS OTHERWISE SPECIFIED
3. ALL CAPACITORS IN MICROFARADS
4. S1 SHOWN IN EXTREME CCW POSITION
5. S3 LEVER SWITCHES SHOWN IN RESET POSITION
6. ALL PUSH BUTTONS SHOWN IN NORMAL UP POSITION
7. S1 SHOWN IN "OFF" POSITION
8. S2 SHOWN IN "NORMAL" POSITION
9. VOLTAGES INDICATED ARE FOR REFERENCE ONLY, MEASURED WITH AN AC VTVM FOR CALIBRATION PROCEDURE OF THE INSTRUCTION MANUAL
10. WIRE COLORS INDICATED IN PARENTHESIS (YEL).
11. PRINTED CIRCUIT BOARD TERMINALS INDICATED IN CIRCLES

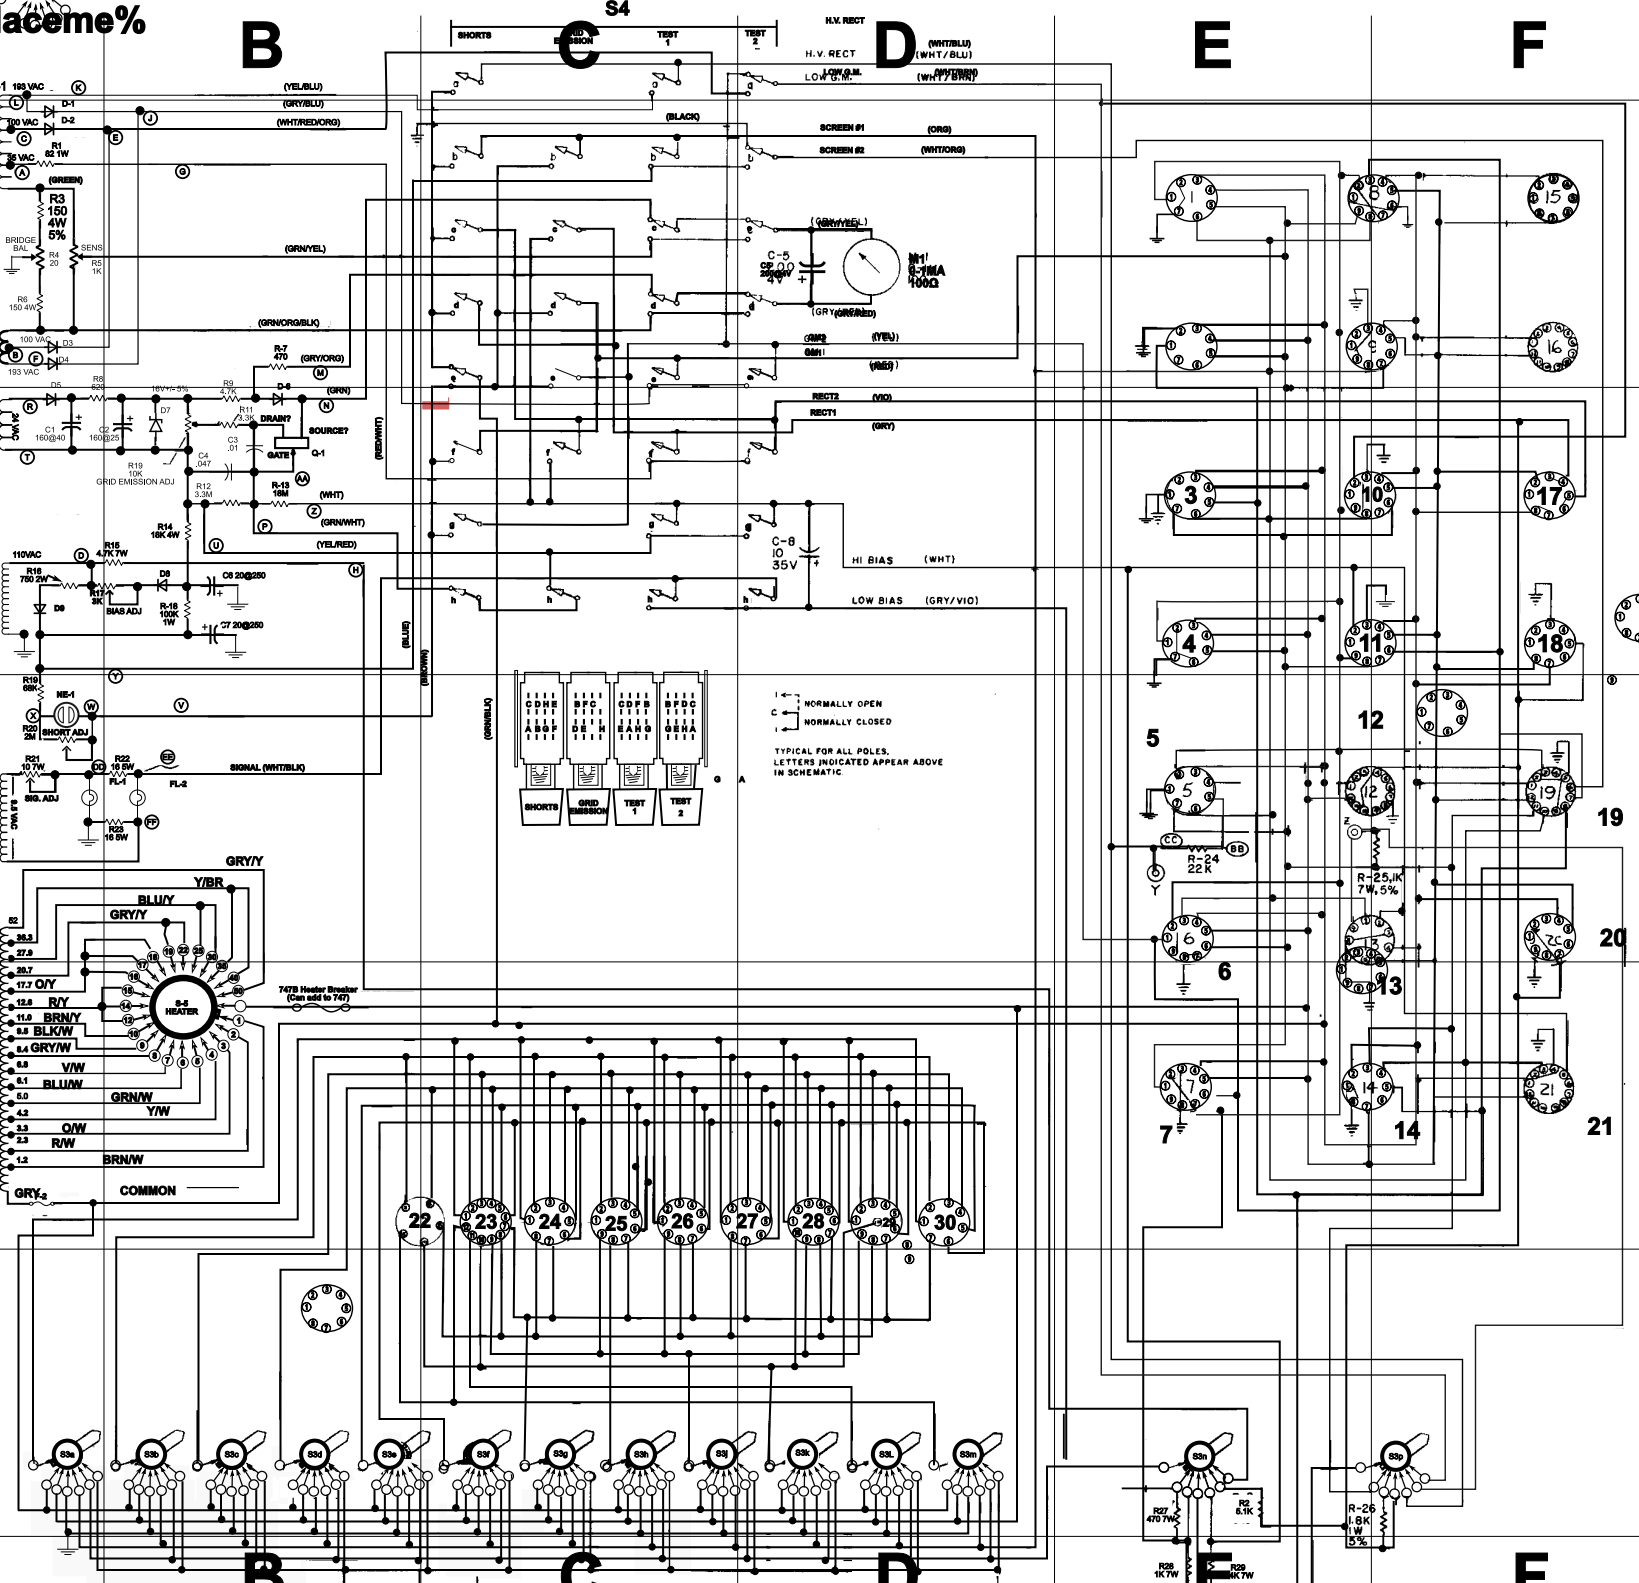

1 - NORMALLY OPEN  
 2 - NORMALLY CLOSED  
 TYPICAL FOR ALL POLES.  
 LETTERS INDICATED ABOVE  
 IN SCHEMATIC

A

B

C

D

E

F