


SECTION 5- ADDITIONAL INFORMATION

PHONOGRAPH FUSES AND CIRCUIT BREAKERS

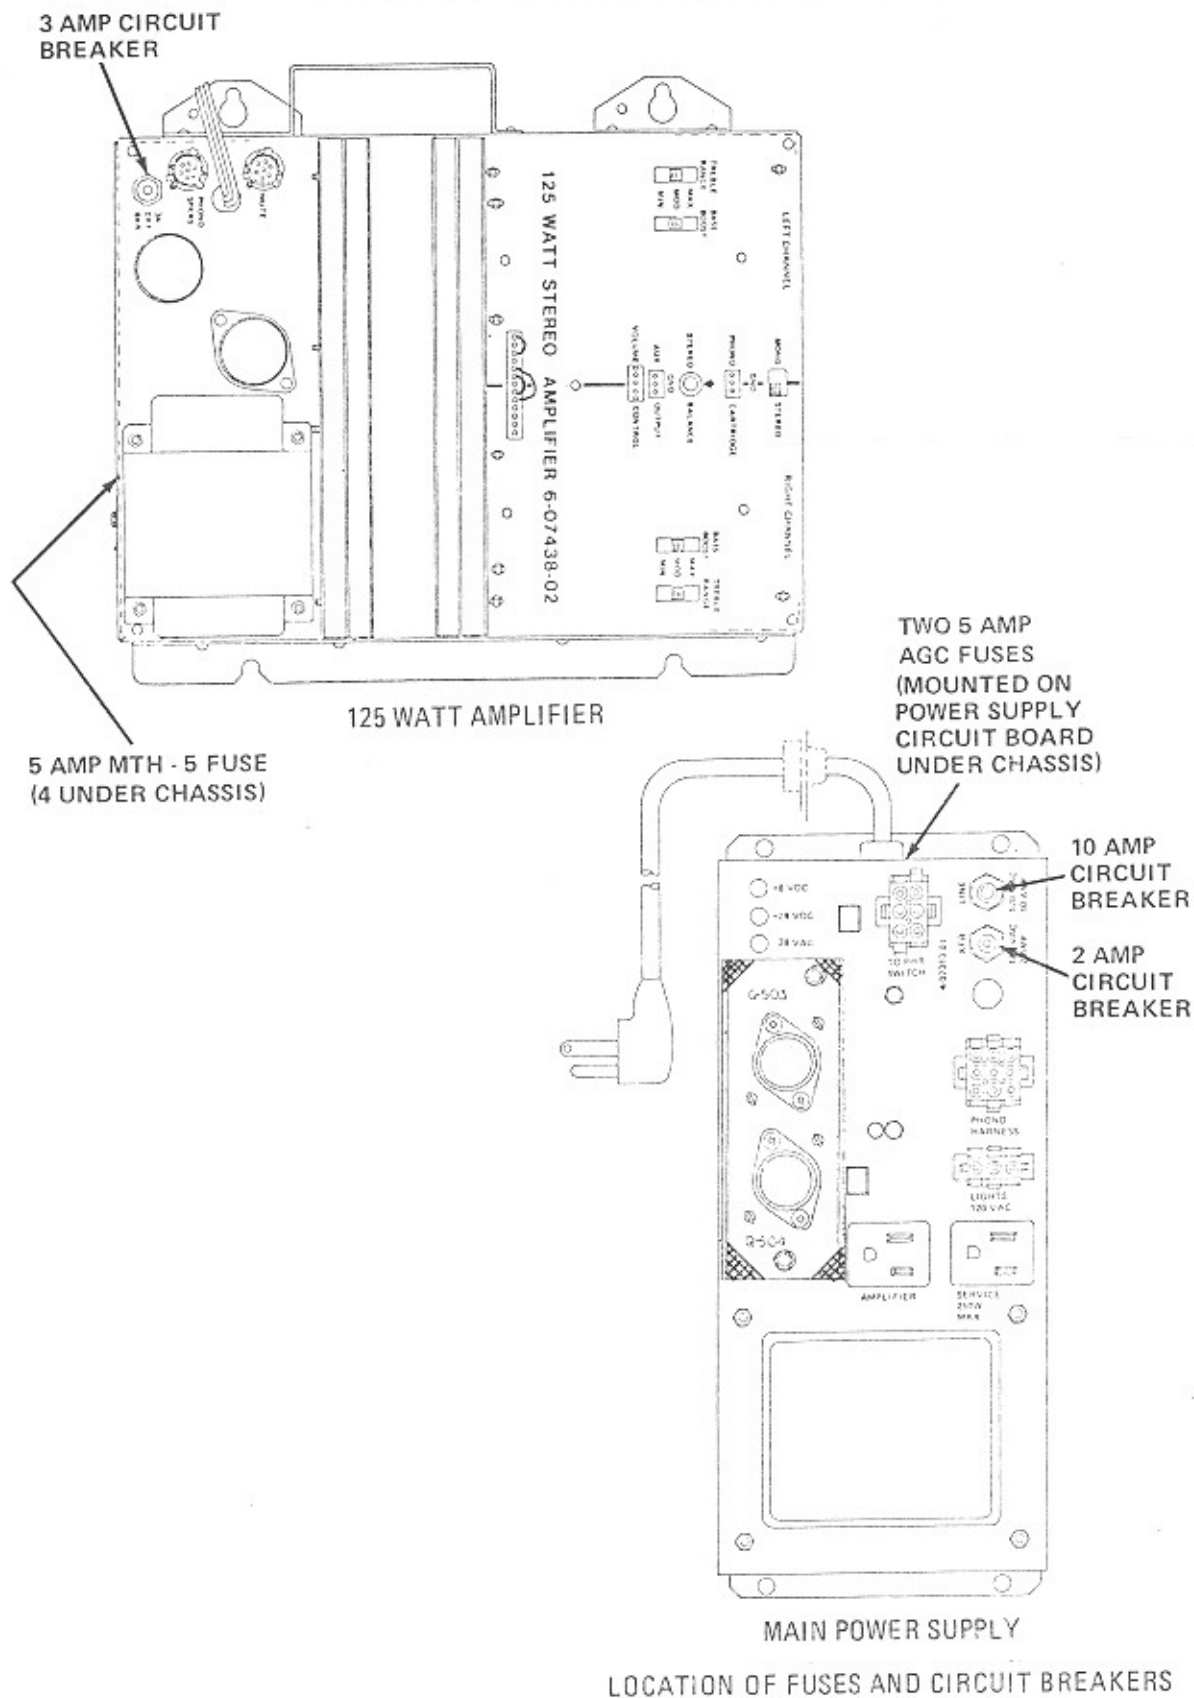

COMPATIBILITY CHART

PART #	DESCRIPTION		CT1-2	R-84	R-85	R1-3	COMMENTS	PALLETS			
	CHIP	ROM						6-08878-01	6-08878-02	6-08878-03	6-08878-04
CENTRAL CONTROL COMPUTER	6-08878-01 6-08878-02 6-08878-03 6-08878-04 6-08878-05 6-08878-06	7-00390-01 7-00390-01 7-00390-03 7-00390-04 7-00390-04 7-00390-04	NONE NONE NONE NONE NONE NONE	-01 CHIP, NO F1FD F1GCY BACK, NO F1FD -03 CHIP, R1-1, F1FD F1GCY BACK, R1-3 NO F1FD ON CHIP HOSTILE 3870	STD STD NOTE B, E NOTE B, C, D NOTE B, C, D NOTE B, C, D	STD STD NOTE A NOTE A STD STD	A. OK - SAME FEATURES AS R-84 B. OK - SAME FEATURES AS R-85 IF -03 OR -04 PRICE 80 C. OK - SAME FEATURES AS R-81 IF -01 OR -02 PRICE 80 D. DIORES 353 C 754 NOT AVAIL. 2334 GIVES 160 PLAY NOTE B	STD STD NOTE D NOTE D NOTE D NOTE D	STD STD NOTE A NOTE A STD STD	NOTE A NOTE A NOTE A NOTE A	NOTE A NOTE A STD STD
PRICE BOARD	6-08878-01 6-08878-02 6-08878-03 6-08878-04	15 PLAY/COIN MAX. LIMITED LEVEL RATIO 15 PLAY/COIN MAX. LIMITED LEVEL RATIO DIORES 353 & 354 ADDED. NOTE C	STD STD STD STD	STD STD NOTE F NOTE F	NOTE E NOTE E STD STD	NOTE E NOTE E STD STD	C. OK BUT SAME PRICE FEATURES AS R-84 F. OK BUT SAME PRICE FEATURES AS R-84 UNLESS COMPATIBLE COMPUTER BOARD USED. G. ADDED CR. LEVEL ADJUST. ADDED 16 PLAY DIODE. CHANGED 120 TO 160 PLAY (LABELLED R1-3) = 6-08878-05				
WALL BOARD	6-07347-01 6-07347-02 6-07347-03	7-00390-02 7-00390-02 7-00390-02	STD STD STD	STD STD STD	STD STD STD	STD STD STD	H. 6-08988-02 P1GCY BACK ALTERNATE USING PROM.				
AMPLIFIER	6-07439-02 6-07439-03 6-09166-01	125 WATT - INCLUDES OUTPUT TRANSFORMERS 125 WATT - KIT FOR R1-3 INCLUDES ADAPTION 50 WATT - R1-3 ONLY	STD STD STD	STD STD STD	STD STD STD	NOTE I NOTE I STD	I. NEEDS SPECIAL T.A. CABLE AND V. CONTROL (INCLUDED IN KIT)				
MECH ASS'Y	6-08790-01	60 HZ -02 IS 50 HZ	STD	STD	STD		J.				
MECH CONTROL	6-07221-01 6-07221-02	BOTTOM MOUNT SCREW TO MECH TOP MOUNT SCREW TO MECH	STD STD	STD NOTE L	NOTE K NOTE K	NOTE K NOTE K	K. OK. RE-USE MECH MOUNT PLATE AND MOUNT TO BOTTOM FRAME. L. OK. MOUNT TO BOTTOM BACKLET.				
POWER SUPPLY	6-07313-01 6-65087-01	000V51C 120V EXPONAT	STD NOTE M	STD NOTE M	STD NOTE M	STD NOTE M	M. 6-65087-01 = 120V, 6-65087-02 = 220V, 6-65087-03 = 240V.				
015C0 CONTROL	6-07169-02 6-07501-01	CHASE PATTERN - 1 CIRCUIT ON, 3 OFF CHASE PATTERN - 3 CIRCUITS ON, 1 OFF	STD STD	STD	STD		N. 6-04 A-85				
BA-5 BILL ACCEPTOR	2-66071-01 2-66071-03 2-66071-07	DOLLAR BILL ACCEPTOR KIT DOLLAR BILL ACCEPTOR KIT \$1 AND \$5 BILL ACCEPTOR KIT	STD STD STD	STD STD STD	STD STD STD	STD STD STD					